

Increased Effectiveness of Shell and Tube Parallel Flow Heat Exchanger by Varying Viscosity Ratio Using CFD Simulation

Vignesh .M

Assistant Professor, Department of Mechanical Engineering, J.B Institute of Engineering and Technology, Hyderabad 500075

Abstract: In previous designs fins were present only on inner side of the heat exchangers. In this design fins are present on both the inner side and outer side of the heat exchangers. By this the staying time of the cold fluid and hot fluid is increased which increases the heat transfer rate. Temperature difference and Viscosity ratio are noted for various cold and hot inlet velocities. Investigation is carried out by increasing number of tubes inside hot fluid path and overall heat transfer rate is calculated. The parameter for which heat transfer rate is maximum is taken as the optimized design. The angle of inclination of the fins on both inner side and outer side are varied for the same cold and hot inlet velocities. In the place of vertical baffles, helical baffles are placed and the heat transfer analysis is carried out. Simulation process is carried out by increasing the number of tubes inside the hot fluid path and overall heat transfer is calculated. The design, for which the Viscosity ratio variation is maximum, can be taken as the optimized design for increased heat transfer rate.

Keywords: H.I.V hot inlet velocity, CFD Computerized fluid dynamics

1. Introduction

Usually fins are present only on inner side of the shell and tube heat exchangers. Here fins are placed on both inner side and outer side of the heat exchanger. The inner fluid inlet rate and outer fluid inlet rate are changed at every stages and the effectiveness are calculated. The designing is done in ANSYS and CATIA. The purpose is to increase the viscosity ratio which increases the heat transfer rate. Here the performance analysis is also carried out for various designs by increasing the number of tubes and changing the types of baffles used (helical and vertical).

2. Background and History

In all the previous paper works analysis has been made on inner side of the heat exchangers. Also analysis has been done concentrating only on the heat transfer rate. Here the importance is given to the Viscosity ratio which is the main factor for increasing Heat transfer rate of the heat exchanger. No alterations has been done in the inlet velocities of hot and cold side. Un-baffled shell-and-tube heat exchanger design with respect to heat transfer coefficient and pressure drop is investigated by numerical modeling. Flow and temperature fields inside the shell and tubes are resolved using a commercial CFD package considering the plane symmetry [1]. The shell-side pressure drop of the LASH baffle heat exchanger is greatly decreased compared with that of the conventional segmental baffle heat exchanger [2]. Comparing with experiment data and heat transfer practical engineering correlations, it is shown that the model can be applied to simulate shell side characteristics of heat exchanger with longitudinal flow of shell side fluid, with higher velocity and reliability [3].

3. Design Parameters

Length of heat exchanger-1m

Diameter of hot fluid path- 10cm
 Diameter of cold fluid path- 15cm

CIV m/s	HIV m/s
0.05	0.1
0.25	0.1
0.05	0.5
0.1	0.01

Velocities used for optimization process are as above.

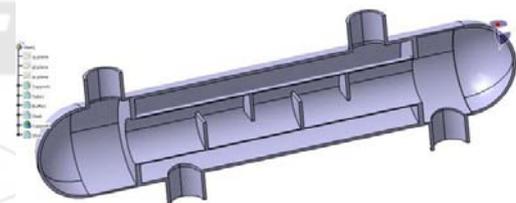


Figure 2.1

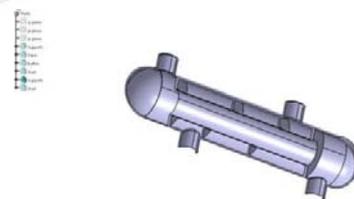


Figure 2.2

Figure 2.1 – baffles on inner side of the tube
 Figure 2.2 – baffles on cold side path
 Figure 2.3 – baffles present on both the side
 Figure 2.4 – vertical baffles with increased number of tubes
 Figure 2.5 – helical baffles with increased number of tubes

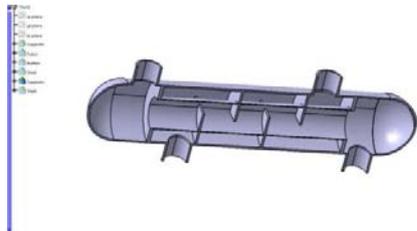


Figure 2.3

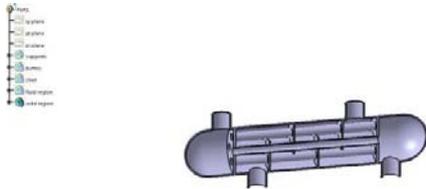


Figure 2.4

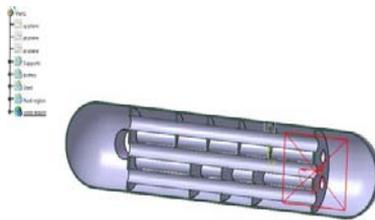


Figure 2.5

In computational modeling of turbulent flows, one common objective is to obtain a model that can predict quantities of interest, such as fluid velocity, for use in engineering designs of the system being modeled. **Computational fluid dynamics**, usually abbreviated as **CFD**, is a branch of fluid mechanics that uses numerical methods and algorithms to solve and analyze problems that involve fluid flows.

4. Methodology

Input parameters	<ul style="list-style-type: none"> • Cold side inlet velocity • Hot side inlet velocity • Cold side fluid inlet temperature • Hot side fluid inlet temperature
Output parameters	<ul style="list-style-type: none"> • Cold side fluid outlet velocity • Hot side outlet velocity • Cold and hot fluid side exit temperatures

Simulation process is carried out through ANSYS by varying the inlet velocities of cold and hot fluid. The design is for single pass with vertical baffles.

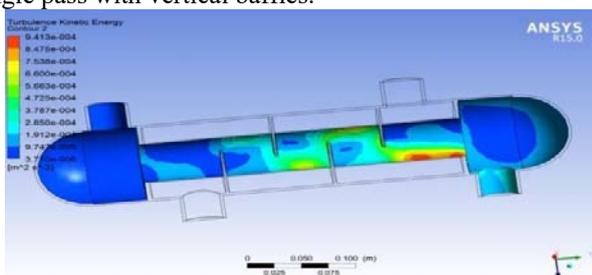


Figure 4.1

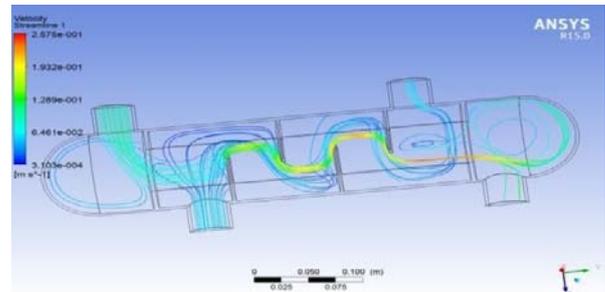


Figure 4.2

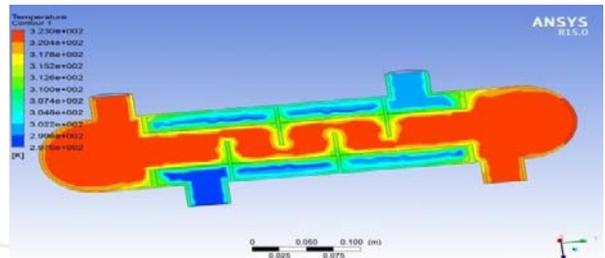


Figure 4.3

Figure 4.1- Viscosity ratio for CIV of 0.05& HIV of 0.1
 Figure 4.2- velocity difference for CIV of 0.05& HIV of 0.1
 Figure 4.3- temperature difference for CIV of 0.05& HIV of 0.1

Similarly, the inlet velocities of hot fluid and cold fluid are changed and the temperature difference, Viscosity ratio, velocity are noted. The velocity for which the heat transfer rate is maximum is taken as the common input parameter and is given for the multi-pass shell and tube heat exchanger for both vertical and helical baffles. The temperature difference, Viscosity ratio difference and velocity difference is also determined and is optimized. It has been made clear that for the CIV of 0.05 m/s and HIV of 0.5m/s the heat transfer rate is maximum.

5. Results and Discussion

$Re = \rho v / \mu$
 Where,
 ρ - density of water (1000 kg/m³),
 v - velocity of water m/s,
 μ - dynamic viscosity .
 Nusselts number = hL / k
 h - heat transfer rate
 l - length of the heat exchanger
 k - thermal conductivity of the material w/m²k

For Internal flow

Nusselts number = $0.036 Re^{0.8} Pr^{0.33} (d/L)^{0.055}$
 Pr = Prandtl number -5.540
 $K = 386$ w/mk
 Re value is taken from the inlet

Graphs for cold inlet velocity of 0.05 m/s and hot inlet of 0.5 m/s

Figure 5.1 length of heat exchanger vs. Viscosity ratio
 Figure 5.2 length of heat exchanger vs. velocity
 Figure 5.3 length of heat exchanger vs. temperature difference
 Figure 5.4 Reynolds number vs. heat transfer at inlet

Figure 5.5 Reynolds number vs. heat transfer at outlet

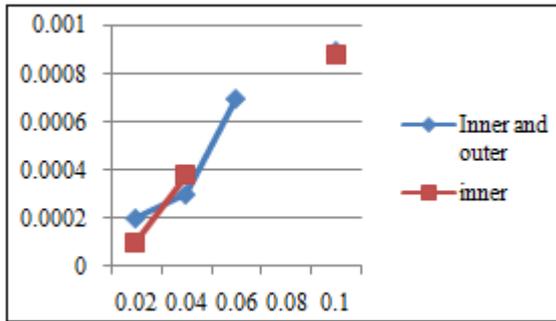


Figure 5.1

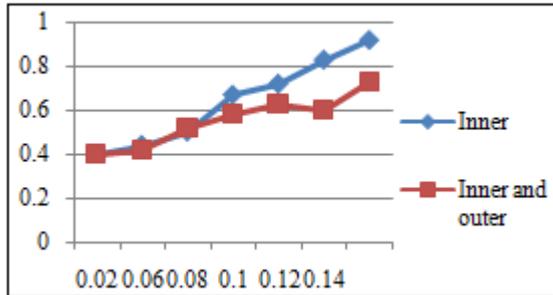


Figure 5.2

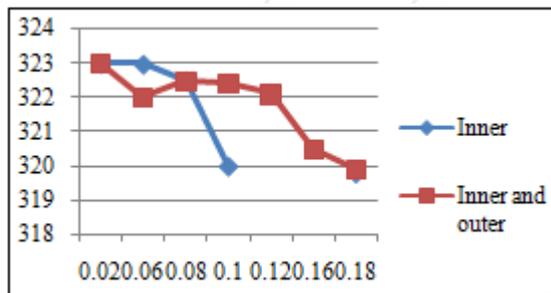


Figure 5.3

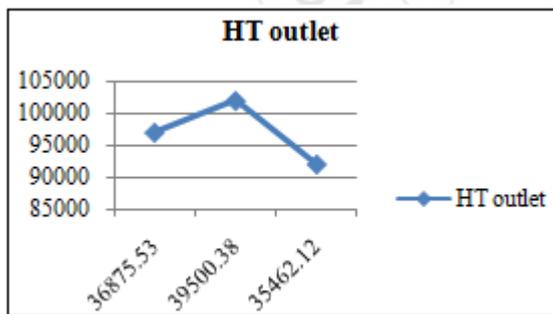


Figure 5.4

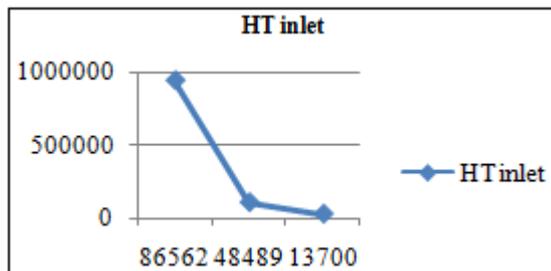


Figure 5.5

The inlet rate of the hot and cold inlets and also for the designs (single pass tubes and multi pass tubes, helical and

vertical baffles) graphs are plotted and heat transfer rate is calculated.

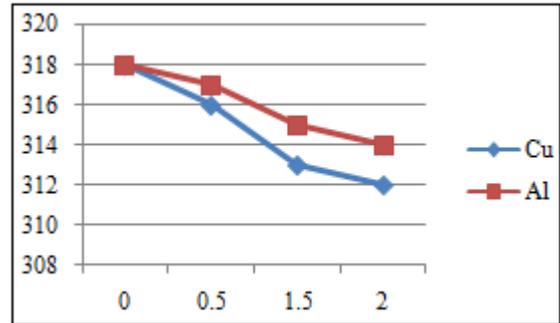


Figure 5.6: (CIV0.05& HIV 0.5 TD)-vertical

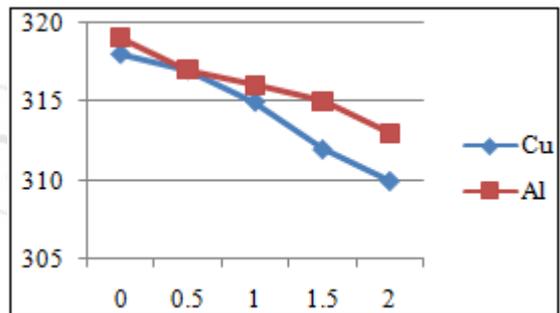


Figure 5.7: (CIV0.05& HIV 0.5 TD)-helical

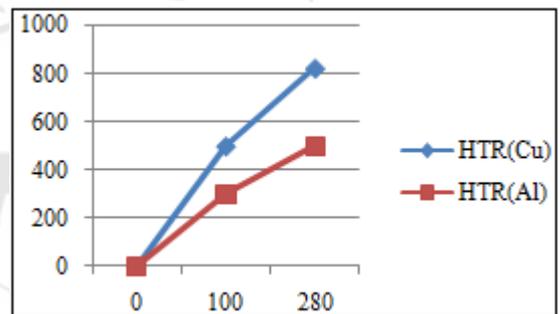


Figure 5.8: (CIV0.05& HIV 0.5 HTR)-helical

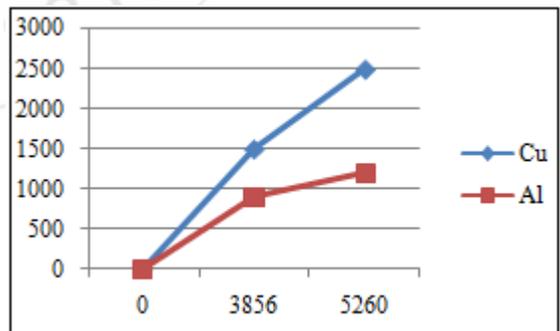


Figure 5.9: (CIV0.05& HIV 0.5 HTR)- vertically placed baffles multipass

6. Conclusion

The heat transfer rate is maximum in all the cases particularly for the fins present on both the sides of the heat exchanger. With respect to the changing of the cold inlet fluid rate to 0.5 m/s and hot inlet fluid rate to 0.05 m/s, the flow rate inside the hot side of the heat exchanger is

decreased which simultaneously increases the staying periods of the fluid inside the heat exchanger. As known, the temperature difference is achieved consequently and the velocity is further increased (figure 5.2) but it is shown that Viscosity ratio increased in regions where inner and outer baffles are present and decreased in the remaining regions. Viscosity ratio of the model with baffles on the inner side is first decreased (figure 5.1) and is increased along the length of the heat exchanger. Also it is shown that, with increase in Reynolds number, the heat transfer rate is increased (figure 5.4). It has been found that, in all the cases, the temperature difference is maximum for copper due to its thermal conductivity (figure 5.6). Heat transfer rate is maximum for copper in helical baffles, compared to steel and aluminum. Similarly the heat transfer rate for copper in case of vertical baffles is also maximum (figure 5.9).

References

- [1] Experimental and CFD analysis of turbulent flow heat transfer in tubular heat exchanger-Hesham G. Ibrahim
- [2] R.K.Sinno Coulson & Richardson's Chemical Engineering: Chemical Engineering Design (volume 6), Butterworth-Heinemann, 3rd ed. 1999.
- [3] D. Q. Kern, Process HeatTransfer, McGraw-HillBook Company,Int. ed.1965.
- [4] Optimization of micro heat exchanger: CFD, analytical approach and multi-objective evolutionary algorithms-Kwasi Foli^{a,1}, Tatsuya Okabe^{et.al.},
- [5] Natural Convection Heat Transfer from Horizontal Rectangular Fin Arrays F. Harahap; H. N. McManus
- [6] Optimization of nusselt number in a helical coil heat exchanger with constant flux boundry conditions using FLUENT -LalitRanjanNai
- [7] Current progress and new developments in enhanced heat and mass transfer -Arthur E. Bergles
- [8] Performance Improvement in Single phase Tubular Heat Exchanger using continuous Helical Baffles -Sunil S. Shinde, Samir S. Joshi, Dr. S. Pavithran
- [9] A general simulation model for performance prediction of plate fin-and-tube heat exchanger with complex circuit configuration - W.K. Ding^a, J.F. Fan, et.al.,
- [10] Baffle space impact on the performance of helical baffle shell and tube heat exchangers -FarhadNematiTaher, SirousZeyninejadMovassag
- [11] Heat transfer enhancement in medium temperature thermal energy storage system using a multitube heat transfer array-Francis Agyenim, Philip Eames, et.al.,
- [12] Experimental and numerical investigations of shell-side thermo-hydraulic performances for shell-and-tube heat exchanger with trefoil-hole baffles-Yonghua You a, Aiwu Fan a
- [13] Heat transfer enhancement for thermal energy storage using metal foams embedded within phase change materials (PCMs) -C.Y. Zhao ,W. Lu,et.al.,
- [14] Laminar periodic flow and heat transfer in square channel with 45 inline baffles on two opposite walls - Pongjet Promvonge*, Somchai Sripattanapipat, Sutapat Kwankaomeng
- [15] An experimental study of enhanced heat transfer in rectangular PCM thermal storage- Uroš Stritih
- [16] Heat transfer and pressure drop in a channel with multiple 60° V-baffle -PongjetPromvonge
- [17] Numerical study of forced convective heat transfer of Nanofluids: Comparison of different approaches R. Lotfi^{a,b}, Y. Saboohi^c, A.M. Rashidi^a
- [18] Experimental investigation on heat transfer enhancement of a heat exchanger with helical baffles through blockage of triangle leakage Zones -Simin Wang a, Jian Wen b,*, et.al.,
- [19] Numerical investigation into the convective heat transfer of TiO₂nanofluids flowing through a straight tube under the laminar flow conditions- Yurong He^a, Yubin Men^a, et.al.,
- [20] Effects of baffle inclination angle on flow and heat transfer of a heat exchanger with helical baffles -Yong-Gang Lei, Ya-Ling He*,et.al.,
- [21] Numerical determination and treatment of convective heat transfer coefficient in the coupled building energy and CFD simulation- Flavio C.C. Galeazzo^a, Raquel Y. Miura^b, Jorge A.W. Gut^c, Carmen C. Tadini^c
- [22] Numerical determination and treatment of convective heat transfer coefficient in the coupled building energy and CFD simulation - Z Zhai, QY Chen
- [23] CFD simulation of coupled heat and mass transfer through porous foods during vacuum cooling process- Da-Wen Sun¹, Zehua Hu