

Figure 2: The Conventional CMOS Full Adder

The CMOS full adder [7] has 28 transistors and is based on the regular CMOS structure is shown in figure2.

3. Methods for Reduce Power

3.1 Domino Logic

Domino logic is a CMOS-based formation of the dynamic logic techniques based on either PMOS or NMOS transistors. It is also known as dynamic logic (digital electronics).It permits a rail-to-rail logic swing. It was invented for increase speed up of circuits and power consumption.

The dynamic logic circuit needs two phases [4]. The first phase: when CLK is low (0), then evaluate N-FET is OFF and precharge P-FET is ON, then output node is precharged to VDD and another nodes precharge to $V_{DD}-V_{th,n}$ and depends on the value of inputs. The second phase: when CLK is high (1), then evaluate N-FET is ON and precharge P-FET is OFF, then output node is discharged depending on the value of inputs if configuration of inputs are conducting path to Ground, otherwise output node keeps high charged[4].

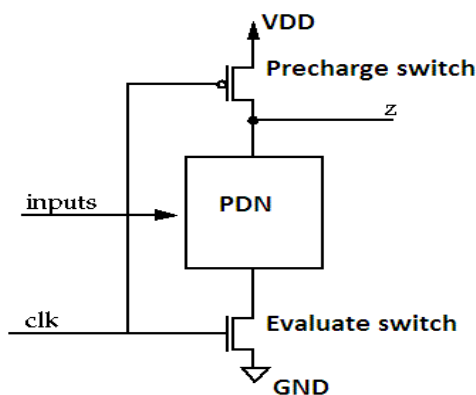


Figure 3: Basic structure of Domino-Logic circuit

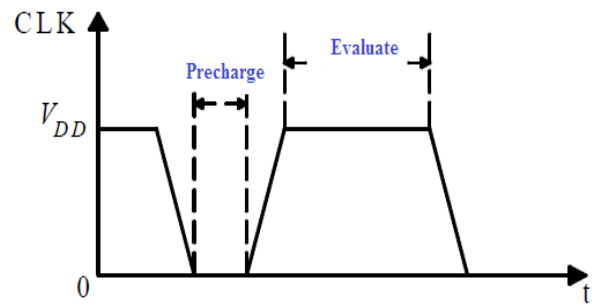


Figure 4: Waveform of the clock needed to operate domino logic

3.2 Employing Keeper

The simplest way to eliminate the power consumption problem of 5-bit full adder the always-on keeper in the evaluation phase of domain gates, is to employ a feedback weak PMOS Keeper [4,5] illustrated in figure 5:

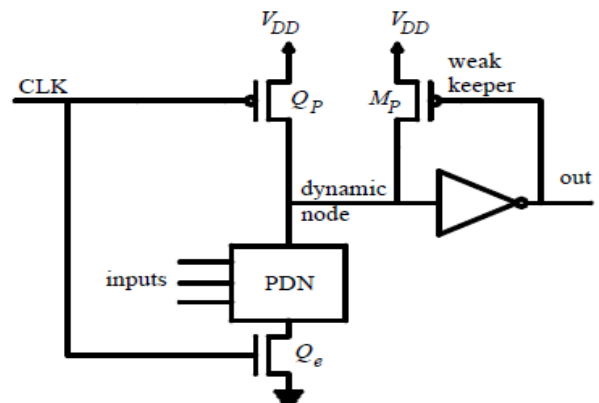


Figure 5: Weak PMOS Keeper to compensate for the leakage through pull-down network.

3.3 Employing Footer

Another method to eliminate the power consumption problem in 5-bit full adder by connecting a NMOS footer transistor to ground [2] illustrated in figure 6:

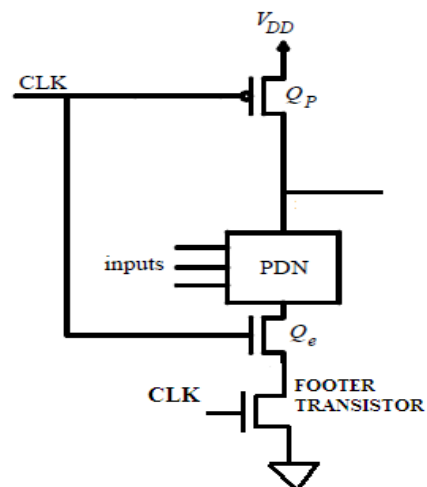


Figure 6: Basic structure of NMOS Footer Transistor

3.4 Transmission Gate Logic

The motive behind using Transmission Gate is to minimize the number of Transistors with degrading signal strength as Transmission Gate passes all types of signal without degrading them. The advantage of having Transmission Gate is that the signal is passed without any gate attenuation unlike NMOS and PMOS.

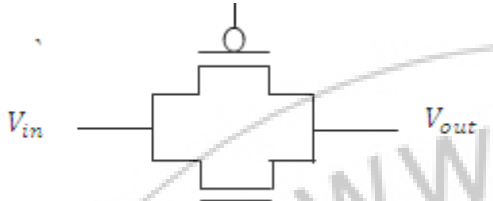


Figure 7: Basic structure of Transmission Gate

4. Proposed Work

The main objective of this project is to design and implement of the leakage power reduction in 5-bit Full Adder (Domino Logic and Transmission Gate) technology using of footer and Keeper transistor. In this technique to calculate power consumption of Half Adder, Full Adder using Domino logic, Transmission Gate, Keeper and Footer Transistor. In this section to design Full Adder circuit diagram using different techniques. All the circuits design are worked on Tanner EDA Tools.



Figure 8: Circuit Diagram of 5-Bit Full Adder

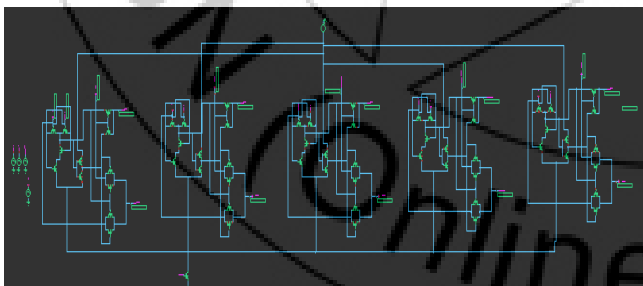


Figure 9: Circuit Diagram of 5-Bit Transmission Gate Based Full Adder with Footer

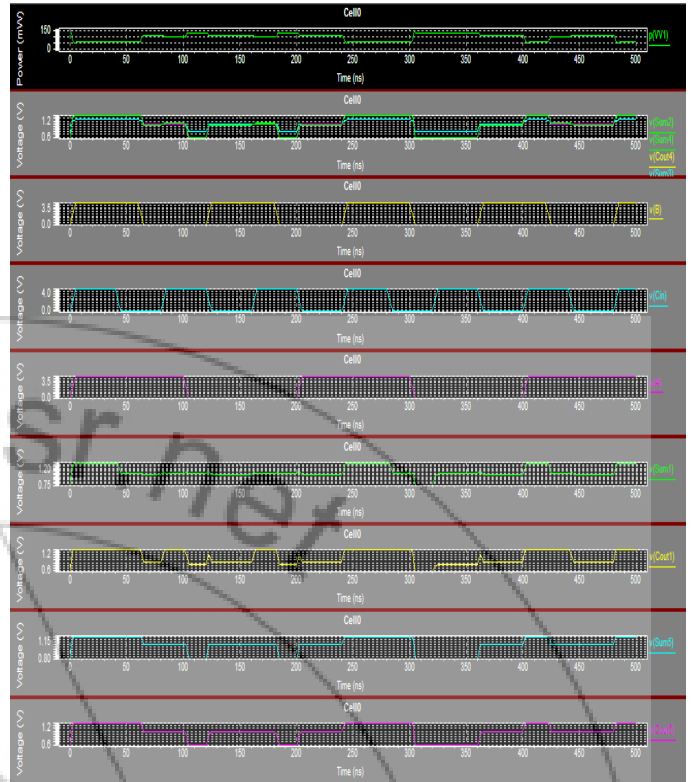


Figure 10: Waveform of 5-Bit Full Adder

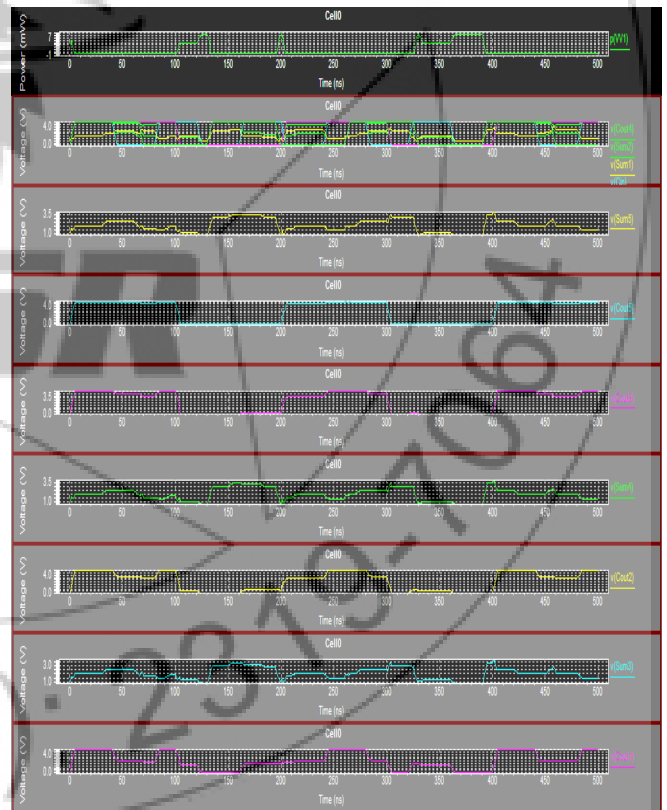


Figure 11: Waveform of 5-Bit Transmission Gate Based Full Adder with Footer

5. Result & Comparison

Leakage power reduction in 5-bit Full Adder using Keeper and Footer transistor with the help of Domino Logic and Transmission gate technique using analysis section, “.trans 5ns 500ns; .power VVdd” where $V_{dd}=2.5V$ has been carried

out on Tanner EDA Tools. Average power consumption (mW) of 1-bit Half Adders is shown in Table II and Figure 11. Average power consumption (mW) of 1-bit Full Adders is shown in Table III and Figure 12. Average power consumption (mW) of 5-bit Full Adders is shown in Table IV and Figure 13.

Table 2: Avg. Power Consumption (mW) in Half Adders:

S. No.	Half Adders	Average Powers Consumption(mW)
1.	Half Adder	10.7mW
2.	Domino Half Adder	6.80mW
3.	Domino Half Adder With Keeper	9.17mW
4.	Domino Half Adder With Keeper & Footer	4.18mW

Table 3: Avg. Power Consumption (mW) in Full Adders:

S. No.	Full Adders	Average Powers Consumption(mW)
1.	Full Adder	18.4mW
2.	Domino Full Adder	13.0mW
3.	Domino Full Adder With Keeper	14.3mW
4.	Domino Full Adder With Keeper & Footer	11.5mW

Table 4: Avg. Power Consumption (mW) in 5-Bit Full Adders:

S. No.	5-Bit Full Adders	Average Powers Consumption(mW)
1.	5-Bit Full Adder	98.8mW
2.	Domino 5-Bit Full Adder	63.1mW
3.	Domino 5-Bit Full Adder With Keeper	70.2mW
4.	Domino 5-Bit Full Adder With Keeper & Footer	31.5mW
5.	5-Bit Transmission Gate Full Adder	10.4mW
6.	5-Bit Transmission Gate Full Adder With Footer	1.35mW

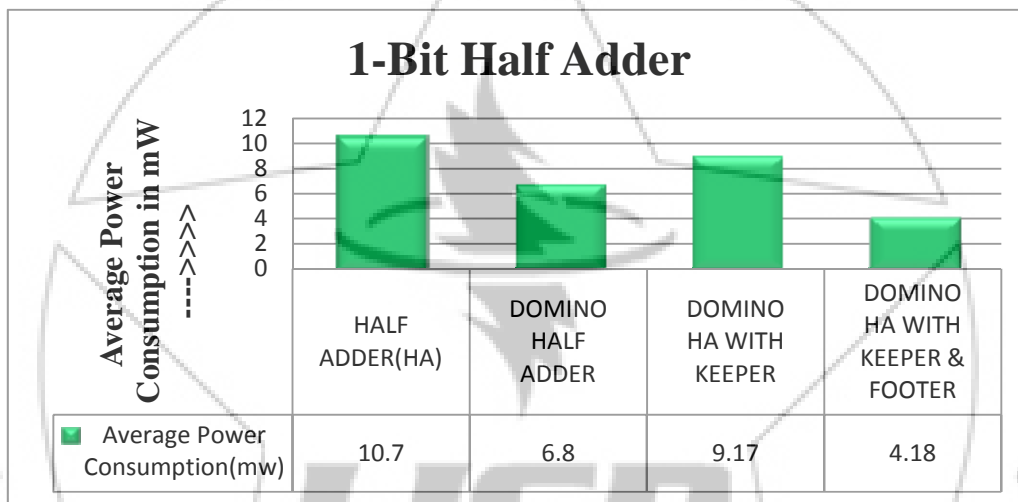


Figure 12: Avg. Power Consumption (mW) vs. Half Adders.

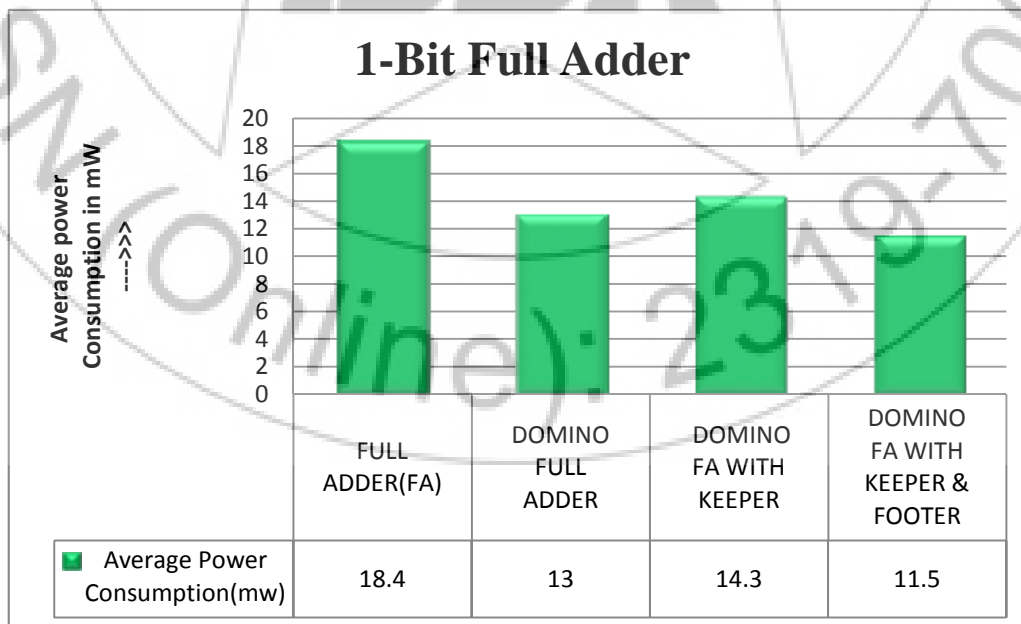


Figure 13: Avg. Power Consumption (mW) vs. Full Adders.

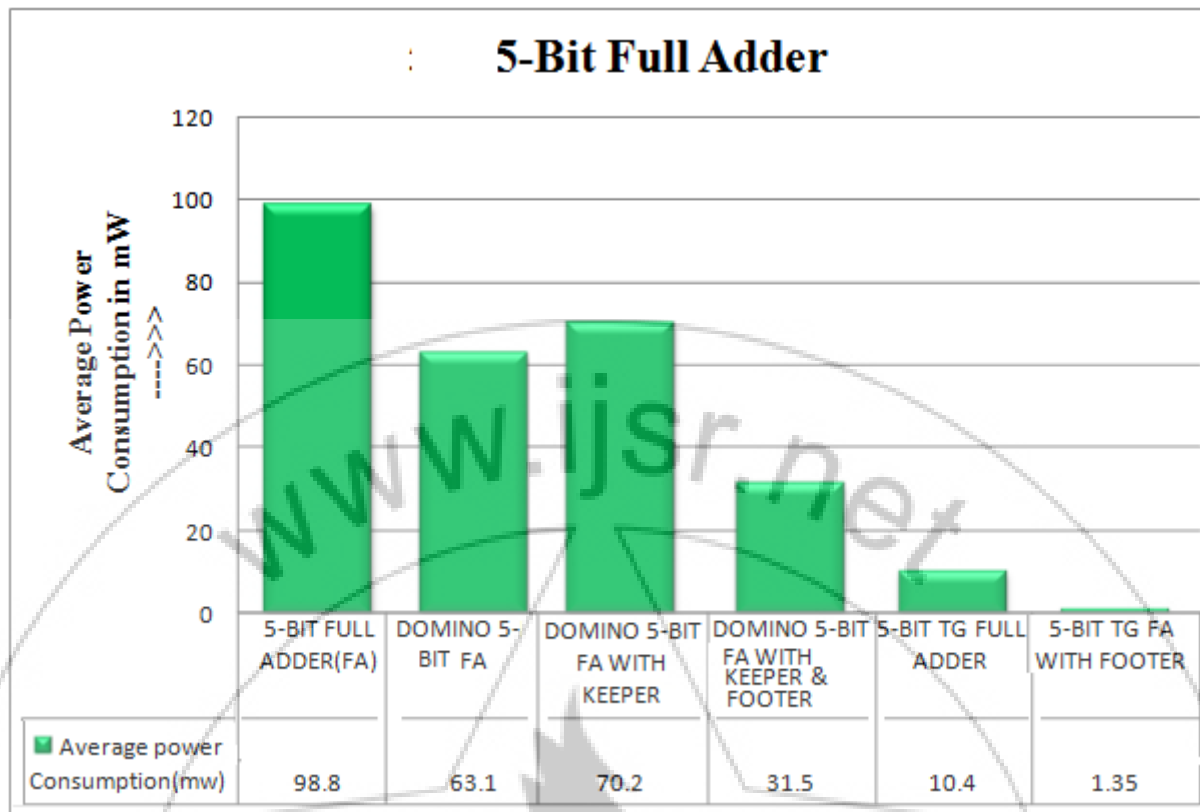


Figure 14: Avg. Power Consumption (mW) vs. 5-Bit Full Adders.

6. Conclusion

In the VLSI design, half adder, full adder and 5-bit full adder with different techniques design circuit diagrams give average power consumption in mW unit, is calculated by Tanner EDA tools. Keeper and Footer transistor using Transmission gate or Domino Logic are used to cooperate in reduction static power dissipation in 5-Bit Full Adder. Power reduction of 5-Bit Full Adder is 98.8mW; with the help of Transmission Gate with Footer transistor in 5-Bit Full Adder has power reduction is 1.35mW using Tanner Tools. So there is reduction of 72.18% in power consumption by 5-bit transmission gate full adder with footer transistor as compared to 5-bit full adder on Tanner Tools.

References

- [1] Pardeep Kumar, "Existing Full Adders and their Comparison on the Basis of Simulation Result and to Design a Improved Low Power Full Adder" International Journal of Engineering Research and Applications (IJERA), Vol. 2, Issue 6, November-December 2012, pp.599-606.
- [2] N. Rajput, M. Sethi, P. Dobriyal, K. Sharma, G. Sharma, "A Novel, High Performance and Power CMOS Efficient Implementation of 8x8 Multiplier Unit using MT-Technique" May 2013.
- [3] Neil H.E. Weste, Kamran Eshraghian, "Principles of CMOS VLSI Design System Perspective" Second Edition.
- [4] Sherif M. Sharroush, Yasser S. Abdalla, Ahmed A. Dessouki, and EI-Sayed A EI-Badawy, "Compensating For the Keeper current of CMOS Domino Logic Using a

Well Designed NMOS Transistor." 26th National Radio Science Conference (NRSC2009), March 17-19, 2009, Faculty of Engineering Future University, Egypt.

- [5] Li Ding, Member, IEEE, and Pinaki Mazumder, Fellow, IEEE, "On Circuit Techniques to Improve Noise Immunity of CMOS Dynamic Logic" IEEE Transactions On Very Large Scale Integration (VLSI) Systems, VOL. 12, NO. 9, September 2004.
- [6] Saradindu Panda, A. Banerjee, B. Maji, Dr. A. K. Mukhopadhyay "Power and Delay Comparison in between Different types of Full Adder Circuits", International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering, Vol. 1, Issue 3, September 2012.0
- [7] I. Hassoune, A. Neve, J. Legat, and D. Flandre, "Investigation of low-power circuit techniques for a hybrid full-adder cell," in Proc. PATMOS 2004, pp. 189-197, Springer-Verlag.

Author Profile



Narendra Yadav is a final year student of M. Tech (Dual Degree) EC+VLSI from Gyan Vihar School of Engineering and Technology Jaipur, Rajasthan, India.



Vipin Kumar Gupta received the B.E. Degree in Electronics and Communication from Sri Balaji College of Engineering and Technology Jaipur in 2008 and M.Tech in VLSI Design from MNIT Jaipur in 2011. Currently Assistant Professor at Suresh Gyan

Vihar University in EC Department.