

Design and Simulation of A Compound Fractal Antenna For Multiband Applications

Anoop Varghese¹, Kazi Aslam²

¹Department of Electronics & Telecommunication Engineering, AISSMS COE, Pune 41101, India.

²Department of Electronics & Telecommunication Engineering, AISSMS COE, Pune-411001, India

Abstract: The traditional Sierpinski gasket monopole antenna is well known for its multiband behavior. Compound fractal antennas have the potential to provide multi-band solution through the property of self similarity that the fractal shape poses. Using a combination of structures we can achieve much better bandwidth than the conventional and traditional fractal antennas. In this paper, a multi-band antenna based on new compound fractal geometry is presented, where the radiating patch is designed in fractal configuration. The aim is to design a multiband antenna with a circular slot inscribed in a triangular patch and to study the effect of iterations on the antenna characteristics. The design is simulated using HFSS software. It is a compact design, fabricated on FR-4 substrate. Here coaxial feeding technique is used to excite the patch. The designed antenna is studied for return loss and bandwidth.

Keywords: Fractal antennas, compound fractal, multiband antenna, HFSS.

1. Introduction

There is a tremendous growth in wireless communication which has resulted interest in the field of multiband antennas. Fractal shapes have the ability to provide multi-resonance behavior. Fractal is derived from a Latin word “fractus” which means broken or irregular fragments. Mandelbrot [1] coined the word fractal and described it as a family of shapes which possess self-similarity and self-affinity in their geometry.

A self-similar [2] structure is structure that is made up of scaled down copies of the original structure, i.e., a contraction of the original structure which reduces by same factors horizontally and vertically. A Self-affine [2] structure, on the other hand is slightly different from self-similar structure, is a contraction which reduces a structure by different factors, horizontally and vertically. So, it can provide additional flexibility in the designing of antenna, since by selecting the scale factors appropriately, resonances can be spaced by different factors. So fractal antenna is a combination of antenna technology and fractal geometry.

Fractal-shaped antennas represent a class of EM radiators where the overall structure of the antenna comprises of a series of repetitions of a base geometry, and where each geometric repetition is of a different scale. Fractal geometry is suitable for antenna design and there must be better shape among those geometries for antennas [3]. The fractal geometry constitutes of an initiator and generator. Initiator is the basic shape of the geometry or is the starting point of a fractal. Generator is the shape which gets repeated in a pattern on the initiator in subsequent stages [3], [4].

The self-similarity property of fractals is the cause of multi-band and broad-band behaviour of antenna and their complicated shapes helps in designing of smaller size antennas [4]. Also because of the discontinuities in the design of fractal structures, bandwidth and the effective radiation of antennas is increased [4], [5].

2. Antenna Design

2.1 Conventional Sierpinski Gasket Antenna

There are several types of microstrip patch antennas based on fractal geometry. One of the well-known fractal antenna is Sierpinski patch antenna and the various types of it are used widely in telecommunication systems [5].



Figure 1: Conventional Sierpinski Gasket (a) Initiator (b) Generator.

Fractal based multiband antenna was first introduced by Puente [5]-[9]. The initiator is shown in Fig. 1(a) and generator is shown in Fig. 1(b). The geometrical construction of the Sierpinski fractal starts with an equilateral triangle called the initiator. Next, with vertices those are located at the midpoints of the sides of the original triangle, a central triangle is formed which is removed from the initial structure resulting in Sierpinski's first order fractal. The Sierpinski Gasket is shown in Fig. 2.

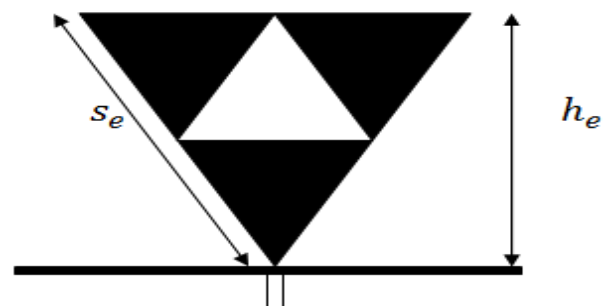


Figure 2: Geometry of Conventional Sierpinski Gasket

2.2 Proposed Antenna Design

The proposed fractal antenna is based on the Sierpinski Gasket antenna. The difference is that instead of a triangular slot a circular slot is removed from the initial structure. The initiator and generator of the proposed compound fractal antenna is shown in Fig. 3(a) and Fig. 3(b) respectively.

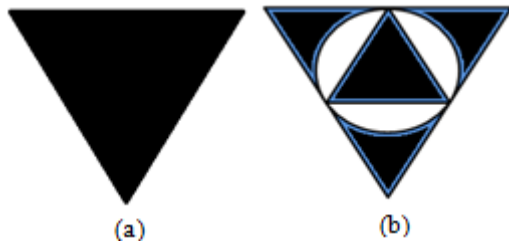


Figure 3: Proposed compound fractal antenna (a) Initiator (b) Generator.

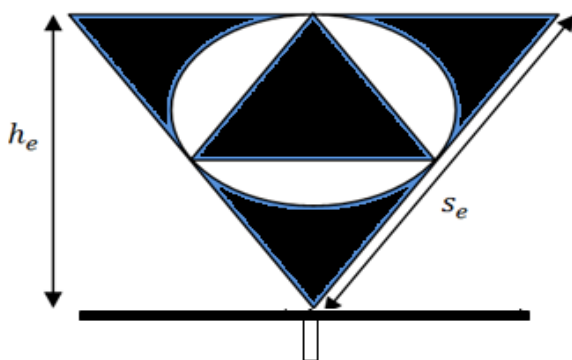


Figure 4: Geometry of proposed compound fractal antenna

Initially it starts with an equilateral triangle which is the initiator. Then a circle with a triangle is inscribed in the equilateral triangle and this circular part is removed, which forms the first iteration. The geometry of the proposed compound fractal antenna is shown in Fig.4. The substrate material is of thickness 1.6mm and with permittivity 4.4. The dimension of substrate is same, 60mmx60mm. The ground is also kept perpendicular to the patch and with the dimension 60mmx60mm. Similarly the effective side length (s_e) is 52.8mm.

The structure was fed through a 50 coaxial probe with an SMA connector on the bottom vertex of equilateral triangle. The structure of the proposed compound fractal antenna on the substrate is shown in Fig 5.

3. Simulated Results

The simulation has been performed using Ansoft HFSS. The radiating patch, the ground plane and all conductors are assumed to be perfect electric conductor. The simulation frequency range is from 0.1 GHz to 4 GHz. The simulated antenna structure is shown in Fig. 5.

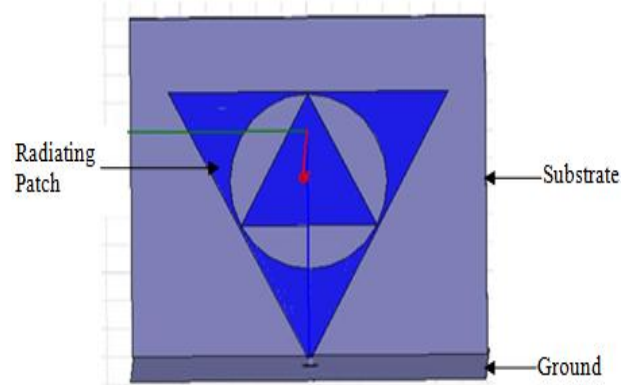


Figure 5: Structure of proposed compound fractal antenna on substrate FR4.

Fig. 6 shows the S_{11} for the first iteration of the Proposed Compound Fractal Antenna with respect to the frequency.

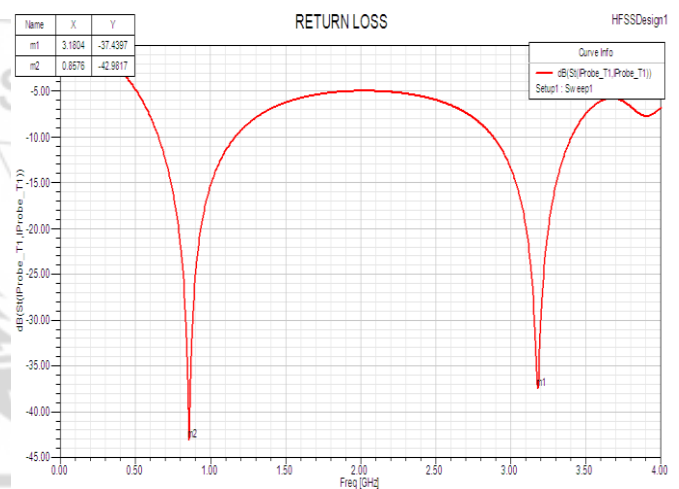


Figure 6: Simulated S_{11} for the first iteration of the Proposed Compound Fractal Antenna.

It can be seen from Fig. 6 that using a compound generator return losses lower than -10 dB are obtained. So two resonances are achieved from the first iteration. The first resonance are slightly lower at 0.86 GHz exhibits a return loss of -42.98 dB and the second resonance at 3.18 GHz exhibits a return loss of -37.43 dB.

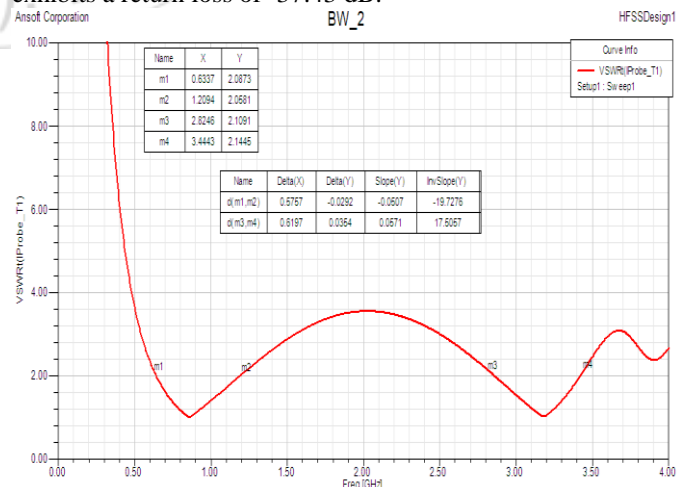


Figure 7: VSWR graph for measurement of Bandwidth for the first iteration of the Proposed Compound Fractal Antenna.

Fig. 7 shows the simulated voltage standing wave ratio (VSWR) with respect to the frequency of the proposed compound fractal antenna. It can be seen from Fig. 7 that the antenna impedance bandwidth extends from 0.63-1.20 GHz and 2.82-3.44 GHz with VSWR less than 2. The bandwidth obtained by the compound fractal antenna, for the resonant frequencies is shown in Table I.

Table 1: Resonant properties for the Proposed Compound Fractal Antenna.

Resonant Frequency	Range Of Frequency	Bandwidth	Bandwidth %
0.86 GHz	0.63-1.20 GHz	570 MHz	66.27 %
3.18 GHz	2.82-3.44 GHz	620 MHz	19.49 %

The far-field radiation characteristics of the proposed compound antenna for the resonant frequencies are shown in Fig. 8. The radiation pattern are obtained in two principal (x-y and y-z) planes.

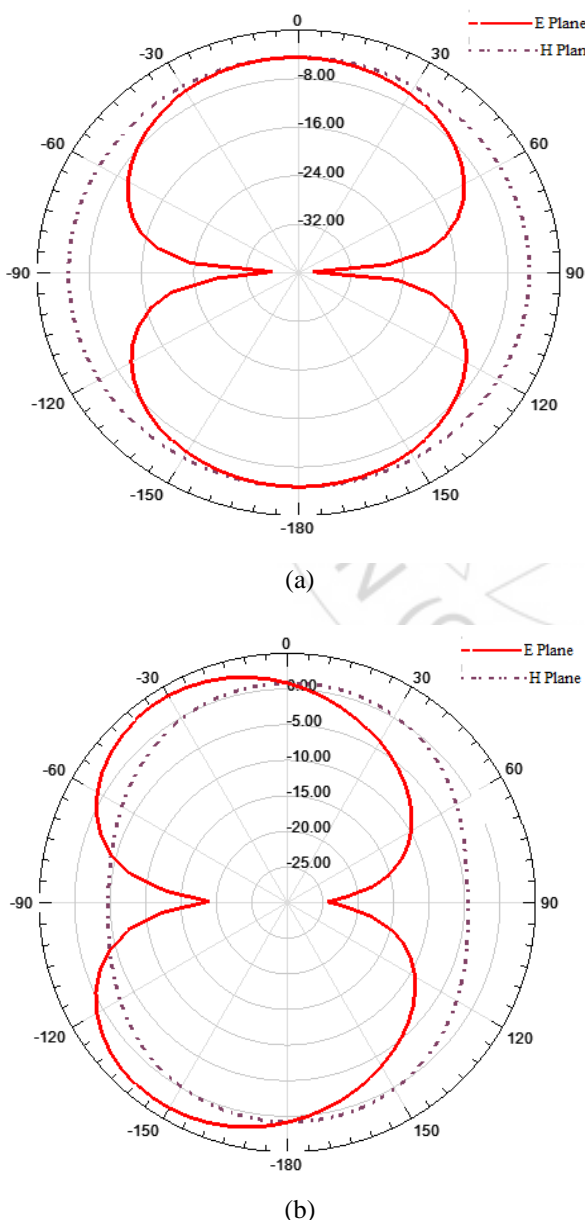


Figure 8: Radiation Patter for the first iteration of Proposed Compound antenna (a) 0.86 GHz (b) 3.18 GHz.

The radiation patterns are stable and in the considered bands this antenna exhibits nearly omni-directional radiation characteristic in the H-plane(y-z plane) and dipole like directional patterns in the E-plane (x-z plane). The E-plane radiation patterns over operating frequencies are roughly symmetric and have two main lobes.

4. Measured Results

The simulated design of proposed antenna is fabricated using FR4 substrate. The radiating patch is of copper material and ground is a simple copper sheet. The prototype is shown in Fig 9.



Figure 9: Photograph of the fabricated antenna.

The fabricated antenna is measured using Vector Network Analyzer. The Network Analyzer was calibrated before measuring the results. The measured results of Return Loss and VSWR are shown in Fig. 10 and Fig. 11 respectively.

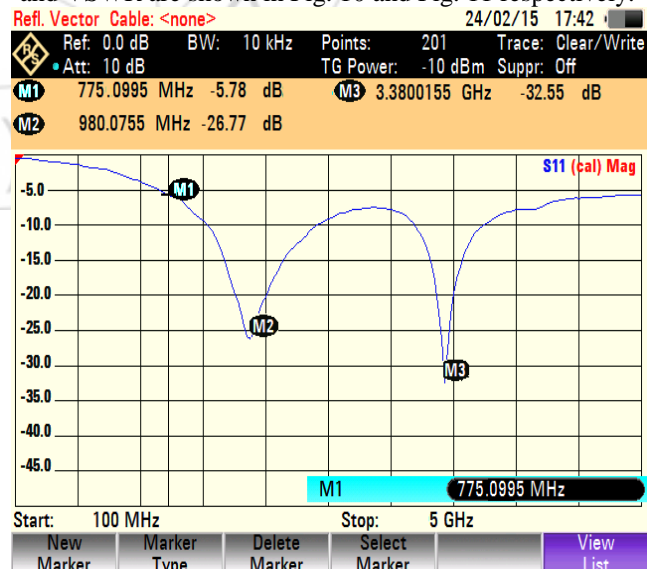


Figure 10: Measured return loss of the fabricated antenna.

Return losses lower than -10dB is achieved which indicates multiple bands. The multiple resonances are achieved at 0.98GHz and 3.38GHz. But compared to the simulated return loss there has been a slight frequency shift.

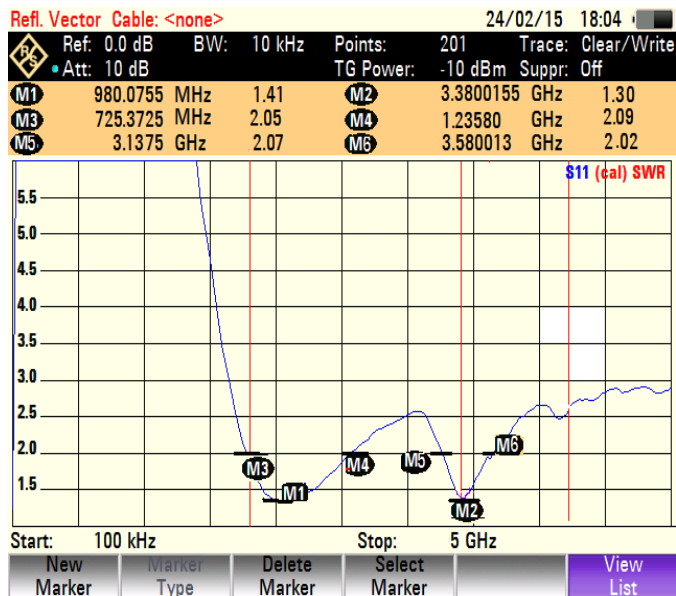


Figure 11: Measured VSWR of the fabricated antenna.

VSWR values lower than 2 are achieved. The values are close to 1 which indicates good matching. The impedance bandwidth obtained by measuring the fabricated antenna is shown in Table II.

Table 2: Resonant properties for the Proposed Compound Fractal Antenna

Resonant Frequency	Range Of Frequency	Bandwidth	Bandwidth %
0.98 GHz	0.72-1.23 GHz	510 MHz	58.16 %
3.38 GHz	3.137-3.58 GHz	443 MHz	13.10 %

5. Conclusion

A novel compound fractal antenna has been designed, simulated and fabricated. The measured antenna shows that the antenna is capable of operating over multiple bands. As the iteration increases the number of resonant frequency increases. The proposed antenna behaves as an multiband antenna. With the addition of a compound generator in the fractal geometry, very good impedance matching and improvement in bandwidth has be attained. Bandwidth of 510MHz and 443MHz has been obtained from the fabricated antenna. The measured results are in good agreement with the simulated results.

References

- [1] B. B. Mandelbrot, "The Fractal Geometry of Nature", New York, W. H. Freeman, 1983, 230-240, 2012.
- [2] Sachendra N. Sinha and Manish Jain, "A Self-Affine Fractal Multiband Antenna", IEEE ANTENNAS AND WIRELESS PROPAGATION LETTERS, VOL. 6, 2007, pg 110-112.
- [3] Douglas H. Werner and Suman Ganguly, "An Overview of Fractal Antenna Engineering Research", IEEE Antennas and Propagation Magazine, Vol. 45, NO. I, February 200, pg 38-57.
- [4] D. H. Werner, R. L. Haupt, and P. L. Werner, "Fractal antenna engineering: The theory and design of fractal

antenna arrays", IEEE Antennas and Propagation Magazine, Vol. 41, No. 5, pg. 3759, 1999.

- [5] C. Puente, J. Romeu, R. Pous and A. Cardama, "On the behavior of the Sierpinski multiband antenna", IEEE Antennas and Propagation Magazine, vol. 46, pp. 517524, Apr. 1998.
- [6] C. Puente, J. Romeu, R. Pous, X. Garcia, and F. Benitez, "Fractal multiband antenna based on the Sierpinski gasket", Electron. Lett., vol. 32, pp. 12, Jan. 1996.
- [7] Jordi Romeu and Jordi Soler, "Generalized Sierpinski Fractal Multiband Antenna", IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, VOL. 49, NO. 8, AUGUST 2001.
- [8] Steven R. Best, "A Discussion on the Significance of Geometry in Determining the Resonant Behavior of Fractal and Other Non-Euclidean Wire Antennas", IEEE Antennas and Propagation Magazine, Vol. 45, No. 3, June 2003.
- [9] R. K. Mishra, R. Ghatak, D. R. Poddar, "Design Formula for Sierpinski Gasket Pre-Fractal Planar-Monopole Antennas", IEEE Antennas and Propagation Magazine, Vol. 50, No. 3, June 2008.