

Flat Slab

Maaz Allah Khan, Rasheeduddin, Mohammad Alim Khan, Parvej Alam


B.Tech, Civil department at Azad Institute of Engineering & Technology
AKTU University, Lucknow, UP, India

Abstract: "Flat Slab" is better understood as the slab with walls. By virtue of that large Bending Moment & Shear Forces are developed close to the columns. These stresses brings about the cracks in concrete & may provoke the failure of slab, thus there is a need to provide a larger area at the top of column recognized as column head/capital. The objective of this paper is to present the use of flat plate/slab construction in India. The applications in buildings followed by a comparative description of flat plate/slab structure designs based on Indian Standard 456:2000[1] and American Concrete Institute ACI-318[2] codes. The discussion of Reinforced Concrete (RCC) Flat Slabs preferred over those of Post-Tensioned (PT) flat slab. Also, we have studied that many of the usual advantages of using PT systems over conventional RCC including a nearly crack free slab at service load leading to smaller deflection and watertight structures. In practical we have observed that the PT structure doesn't reduce thickness structure.

Keywords: RCC, bending moment, shear force. Reinforced Concrete Frame, Flat Slab Frame, Flat Plate Frame, Prestressed Slab Frame

1. Introduction

A flat slab consists of a reinforced concrete slab that is directly supported by concrete columns without the use of intermediate beams. C.A.P. Turner constructed flat slabs in U.S.A. in 1906 mainly using intuitive and conceptual ideas, which was start of this type of construction. Many slabs were load-tested between 1910- 20 in U.S.A. It was only in 1914 that Nicholas proposed a method of analysis of flat slabs based on simple statics. This method is used even today for the design of flat slabs and flat plates and is known as the direct design method. Structural engineers commonly use the equivalent frame method with equivalent beams such as the one proposed by Jacob S. Grossman in practical engineering for the analysis of flat plate structures. Floor systems consisting of flat slabs are very popular in countries where cast-in place construction is predominant form of construction because of many advantages in terms of architectural flexibility, use of space, easier formwork, and shorter construction time. reduced formwork cost, fast excavation, and easy installation.

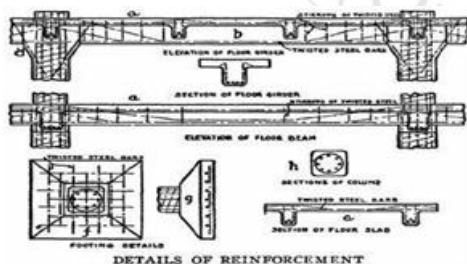

Architectural demands for better illumination, lesser fire resistance of sharp corners present in the form of beams & increase in the formwork cost, optimum use of space leads to the new concept in the field of structural engineering as Reinforced concrete flat slabs.

2. Objectives


A. The objective of the present work is to compare the responses such as time period, base shear, top displacement and storey acceleration for RC frame building, flat slab building, flat plate building and

prestressed slab building using response spectrum analyses.

B. Flat Plate Flat plate structure consists of a slab with uniform thickness supported on columns with no Prestressed Slab Building In order to overcome concrete natural weakness in tension, it can be used to produce the beam floor, bridges with longer span, drop panels and no beam. The economy of the flat plate building has lead to their wide spread utilization throughout the world. Flat plates have been widely used due to less construction cost associated with the simple formwork and simple arrangement of flexural reinforcement.

3. Comparison between Flat Slab and Other Type of Slab

- A. Flat Slab In normal building construction columns, slabs and beams are utilized. Building structures can also be constructed using only column without beam, such types of slabs are called flat slabs. The slab directly rests on column and load of
- B. The slab is directly transferred to the columns and then transferred to the foundation.

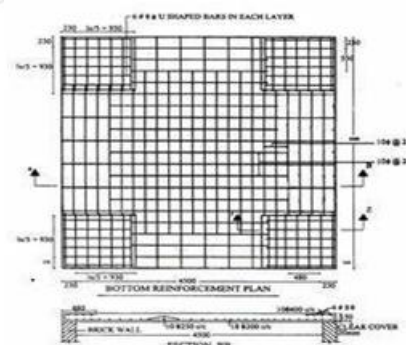

4. Problem Formulation

Here, we are focusing on the behaviour of flat slab RCC structure in four different types. One is with drops and another one is without drop and these two models are modeled with shear walls at corners. As it is clear from

previous literature that flat slab and also checked for tendency of punching shear failure in flat slab through checking punching shear stress various places in prescribed 4 models. Response spectrum method is considered to analyze the structure by using ETABS software.


Here, 4 models were created and all are analyzed for seismic loads.

Those are;

1. Flat slab structure without drop
2. Flat slab structure with column drops
3. Flat slab structure with shear wall
4. Flat slab structure with column drops and shear wall together

C. Flat Plate Flat plate structure consists of a slab with uniform thickness supported on columns with no

D. Prestressed Slab Building In order to overcome concrete natural weakness in tension, it can be used to produce the beam floor, bridges with longer span, drop panels and no beam. The economy of the flat plate building has lead to their wide spread utilization throughout the world [2]. Flat plates have been widely used due to less construction cost associated with the simple formwork and simple arrangement of flexural reinforcement, which are not practical with ordinary reinforced concrete. In 1904, Freyssinet attempted to introduce permanently acting forces in concrete to resist the elastic forces developed under loads and this idea was structure are unstable for seismic forces, we are analytically investigating the behaviour of flat slab during the earthquakes(zone III) and checked for increase of punching shear from gravity loads to earthquake loads by taking one center column and one exterior column in intermediate frame in model. The spans must be similar in length i.e. adjacent span in each direction must not differ in length by one third variation Engineering Analysis: Flat plate/slab may be analyzed and designed by any method as long as they satisfy the strength, stiffness and stability requirements of the IS 456:2000 or ACI-318 codes. A typical flat plate/slab can be analyzed by direct design method or equivalent frame method as prescribed by the code. However, if the flat plate/slab is a typical with unusual.

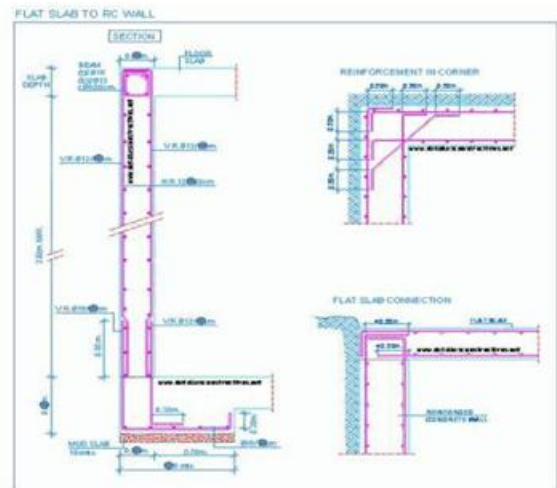

C. Design of the Flat Slab Structures

Despite the rapid growth of flat plate/slab construction, literature and tools available for designers to design and engineer flat plate/slabs in India, has been limited in terms of both Indian standards and Indian research papers. Indian engineers often have to resort to other standards to design flat plate/slab. The following is a discussion of the process of designing flat plate/slabs to meet Indian codes. Limitations in the Indian codes IS 456:2000 are overcome by utilizing ACI- 318. Maintaining the Integrity of the Specifications

The design of flat slab structures involves three steps:

- 1) Framing system
- 2) Engineering analysis
- 3) Reinforcement design and detailing Framing System: Initial framing system formulation provides a detailed geometric description of the column spacing and overhang. Even though the architect provides this part of the design, the engineer should emphasize on the following:

1) Three continuous spans in each direction or have an overhang at least one-fourth times adjacent span length in case of only two continuous spans.

2) Typical panel must be rectangular direction and project below the slab at least one-quarter of the slab thickness. In order for the full effective depth of the drop to be used for negative moment reinforcement, the maximum depth of the drop shall not be assumed more than one-fourth of the distance between the edge of the drop and face of the column. Additionally, drop size can be made as large as possible to reduce deflection. The absolute sum of the positive and negative moment in each direction is given by every code suggests any of the two methods as Direct Design Method and Equivalent Frame Method for analysis of flat slab. Design of Flat slab by Direct Design Method has some restrictions that geometry, with irregular column spacing, or with big opening then the designer may have to use finite element method model analysis using computers. The design of flat plate/slabs irrespective of the methodology used must first assume a minimum slab and drop thickness and a minimum column dimension to

ensure adequate stiffness of the system to control deflection. The IS 456:2000 code is not clear on these minimums. However ACI specifies empirical formulas to arrive at these minimums. Refer to Table 1 for minimum slab thickness. Once the slab thickness and column dimensions with boundary conditions are selected, the structure is loaded for different load cases and combinations prescribed by the code. The computed forces and moments in the members should be used for reinforcement design. Critical reactions for the load combinations are used for the design of the supporting columns and foundations. Reinforcement Design and Detailing Reinforcement design is one of the critical parts of flat plate/slab design; maximum forces from the analysis shall be used in the design of the reinforcement. Reinforcement required for flexure by using minimum slab thickness per table 1 typically will not require compression reinforcement.

The tension steel area required and detailing for appropriate strips can be per IS 456:2000 or ACI-318, both being similar. However design for punching shear force (including additional shear due to unbalanced moment) per IS 456:2000 is 32% conservative compared to ACI-318, because Indian code underestimates the concrete two-way shear strength by 32% compared to ACI.

Slabs with columns between, along exterior edge. The ratio of flexural stiffness of effective beam to Flexural stiffness of width of slab bounded laterally by the centerline of adjacent panel on either side of beam shall not be less than 0.8 Minimum drop panel shall be at least one-sixth of the span in each utilizing PT system has been that there is no reduction in thickness of the slab compared to conventional RCC and the slabs are not crack free at service loads. Hence, the actual deflection in these structures is similar to that of theoretically computed RCC deflection.

- (a) It should have minimum three spans in each direction
- (b) It should not have staggered column orientation. Hence Equivalent Frame Method is adopted. Using those calculated moments calculate negative moments at both left & right support i.e. (M-u) & the maximum positive moments in the middle of span i.e. (M+u). All the Negative & Positive moments are distributed in the column strips & Middle strips respectively using equivalent codes. IS 456-2000 Distribution of moments across panels for Exterior Slab

5. Post-Tensioned Flat Plate / Slab


Post-tensioned flat plate/slabs are a common variation of the conventional plate structure where most of the reinforcement is replaced by post-tensioned strands of very high strength steel. The structural advantage of post tensioning over conventional RCC is that the slab is nearly crack-free at full service load. This leads to a smaller deflection compared to conventional RCC because of the higher rigidity of the un-cracked section. Hence reduction in thickness of the slab compared to conventional RCC is the rationale for using post-tensioning system for spans over 10m and above. Further the lack of cracking leads to

a watertight structure. Flat plate/slab design and build contractors in India claim a 20% cost reduction compared to conventional RCC. However, our observation of post-tensioned flat plate/slab constructions used in two construction projects in India built by post tensioned concrete.

In addition, water tightness was not achieved in one of the projects. And with respect to costs involved, there is an escalation in cost by 15-20% rather than reduction as claimed by PT design & build contractor. And another disadvantage in using post tensioned system in commercial buildings in India is its lack of flexibility to create openings or drill into slabs to anchor services system when the slab is completed with post tensioning. Invariable the owner in India is not sure of the occupant when he starts the building and may have to change or create opening in slabs after construction to satisfied occupants requirement, which is not possible with a PT system.

6. Conclusion

Flat plate/slab construction is a developing technology in India. Flat plate/slab can be designed and built either by conventional rcc or post-tensioning. However, due to issues mentioned above with pt construction in India and its higher cost, conventional rcc should be the preferred choice for spans up to 10 meters. Design of conventional rcc flat plate/slab in India, utilizing Indian codes, has many shortcomings, which have to be addressed and revised soon. Until then Indian engineers will continue to use Indian codes in combination with other standards like the aci, bs or euro code to design and analyze flat slabs/plates.

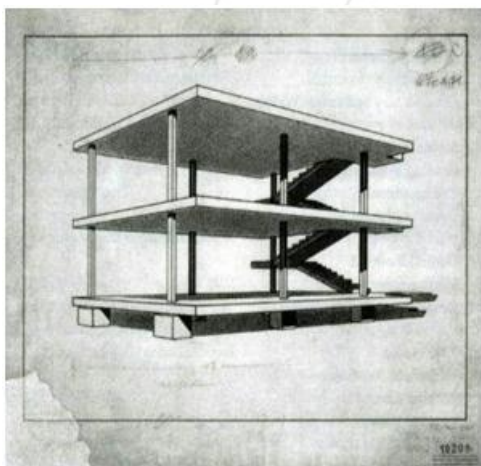

References

- [1] Indian Standard IS 456:2000, Plain and Reinforced Concrete Code of Practice
- [2] American concrete institute ACI 318, building code requirements for structural concrete and Commentary
- [3] Purushothaman P., Reinforced Concrete Structural Elements, Tata McGraw-Hill Publication Company Ltd. New Delhi. 1984
- [4] Gowda N Bharath; Gowda S. B. Ravishankar; A.V Chandrashekar, Review and Design of Flat Plate/Slabs Construction in India
- [5] Verghese P.C., Advanced Reinforced Concrete Design, Prentice-Hall of (India Private Ltd. New Delhi. 2003
- [6] Notes on ACI 318-2000, Building Code Requirement for Reinforced Concrete, Portland cement association. USA 2000

- [7] Structural Design Guide to the ACI Building code, Third edition, Van Nostrand Reinhold Company. New York. 1985
- [8] Er. M.A.Khan Analysis of high rise reinforced concrete building IJETTER volume-4 Issue no.4 2016
- [9] Er. M.A.Khan Eco-friendly building IJSRD Volume-10, Issue no.10, 2016
- [10] Er. M.A. Khan & Er. MD. Salman Sewage treatment techniques IJSTE Volume-3, Issue no. 6, 2016
- [11] Er.M.A.Khan Earthquake resisting building IJSTE Volume-3, Issue no.-6 2016
- [12] Er. M.A.Khan Noise control of building IJRDT Volume-6, Issue no.-6
- [13] Amir Poursaeec (2010), " Co in saturated Ca(OH)₂ and concrete pore Concrete Research Letters, 1(3)
- [14] M. Mancio et al, "Electrocsitu SERS Study of Passive Film Characteristics and Corrosion Performance of 9% Cr Micro composite Steel in Highly Alkalineof Env ASTM International, 6(5), 1-10
- [15] Navyashree K, Sahana T.S "U multistorey commercial building situated in high seismic zone "International of Research Engineering and Technology ISSN: 2319-1163, 2321-7308
- [16] Boskey Vishal Bahoria and Dhananjay K. Parbat, "Analysis and Design-tensioned of RCC Flat Slabs Considering Seismic
- [17] ThayaprabaM, "Cost – Effect Tensioned and Reinforced Concrete Flat Slab Systems", International Jou Technology and Exploring Engineering (IJITEE), Volume-3, Issue-12, May 2014
- [18] Vakas K. Rahman1, Prof. A. R. Mundhada, "Comparative Study of RCC a Concrete Flat Slabs", International Engineering Research, Vol. 3, Issue. 3, May.-June. 2013 pp-1727-1730
- [19] Hesham Eid, Kaled. H. Riad and Amr H. Zaher, "Punching Shear of Pre-Stressed Strength Flat Slabin Case of Near-Column Openings" World Sciences Journal, 32 (5), 2014, 780-791
- [20] U. Prawatwong, C.H. Tandian and P. Warnitchai "Seismic Performance–Tensioned Interior of Post SlabColumn Connections with and Without Drop Panel, "The 14th World Conference on Earthquake Engineering", October 12-17, 2008, Beijing, China