

# Design of Compact Microstrip Antenna with High Gain & Bandwidth for LTE System

Poonam Devi<sup>1</sup>, Dr. Sunil Kumar<sup>2</sup>

<sup>1</sup>M.Tech (ECE), Sri Sai University, Palampur (HP)

<sup>2</sup>Professor & Dean, (ECE), Sri Sai University, Palampur (HP)

**Abstract:** This paper proposes the compact microstrip antenna with high gain and broad bandwidth by using Bi-polar mechanism. In this mechanism the surface is increased and the losses are reduced. This antenna uses the MATLAB simulator to calculate the parameters and from results it is found that the bandwidth is wider by using this mechanism. This antenna is used for C-Band application, which is the part of our daily life. The Microstrip Patch Antenna (MPA) is used for daily need communication system and for prolongs communication with anyone in the world. By study of few years' literature it is found that the research on MPA is focused only on the narrow bandwidth of antenna. In this we have high gain and efficiency with low losses. In any case, naturally MPA have thin data transmission so to upgrade transfer speed different strategies are locked in.

**Keywords:** Microstrip Patch Antenna (MPA), Microstrip feed, Patch, Printed Antenna, LTE.

## 1. Introduction

In order to meet the requirements in spacecraft or aircraft applications where size, weight, cost, performance and a low profile antenna are required. Antenna is one of the critical components in any wireless communication system. The word „antenna“ is derived from Latin word „antenna.“ Since the first demonstration of wireless technology by Heinrich Hertz and its first application in practical radio communication by Guglielmo Marconi, the antenna has been a key building block in the construction of every wireless communication system. IEEE defines an antenna as “a part of a transmitting or receiving system that is designed to radiate or receive electromagnetic waves.”

### Micro-strip Antenna

Micro-strip antenna is one of the most popular types of printed antenna. It plays a very significant role in today's world of wireless communication systems. A microstrip antenna in its simplest form is a layered structure with two parallel conductors separated by a thin dielectric substrate and the conductor. The upper portion is termed as patch that is responsible for radiation and lower portion acts as a ground plane. Micro-strip patch antenna consists of a radiating patch on one side of a dielectric substrate (FR4) that has a ground plane (Cu) on the other side as shown in Figure 1.

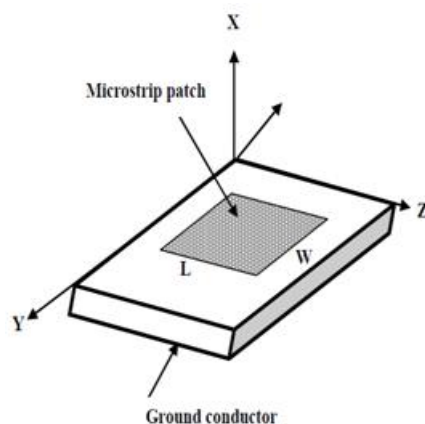


Figure 1: Physical Geometry of Microstrip Antenna.

A rectangular Microstrip antenna consists of very thin radiating metallic patch placed at small height in one side of dielectric substrate which other plane is grounded. Generally, an Microstrip consists of rectangular radiating patch element fed with a coaxial line in which length is most critical dimension and slightly less than half wavelength in the dielectric substrate. The radiating patch of Microstrip antenna are of different shapes such as rectangular, circular, elliptical, square, annular ring etc.

There are many advantages of Micro-strip patch antenna like low cost, compact size, straightforward structure and similarity with incorporated hardware. It has tremendous applications in military, radar systems or mobile communications, global positioning system (GPS), remote detecting and so on. A microstrip radio wire fused with a solitary shorting post at legitimate position and size is found to give lessening in general region with deference to an ordinary patch receiving wire. Additionally, the minimal roundabout spellbound patch receiving wires can be accomplished by space stacking on patch. The heap of the spaces or openings in the emanating patch can cause wandering of the energized patch surface current Paths furthermore, bring about bringing down of the full recurrence of the reception apparatus, Which relates to a decreased radio wire size for such a reception apparatus, contrasted with a routine circularly spellbound microstrip radio wire at the same working recurrence. For outline smaller and broadband microstrip patch receiving wire here shorting strategy utilized with conductive vias [1] for proposed and broke down. This sort of receiving wire had wide data transfer capacity and radiation design like a monopole and this receiving wire was developed on a round patch radio wire [1] that was shorted concentrically with an arrangement of conductive vias. The receiving wire was examined through depression model. Here mono-polar patch receiving wire was using two modes (TM<sub>01</sub> and TM<sub>02</sub> modes) and both modes give monopole like radiation design.

## 2. Antenna Parameters

For design a micro-strip patch antenna following parameters such as dielectric constant ( $\epsilon_r = 4.3$ ), resonant frequency ( $f_0 = 8 \text{ GHz}$ ), and height ( $h = 1.6 \text{ mm}$ ) are considered for calculating the width, effective dielectric constant and the length of the patch.

Effective dielectric constant of antenna ( $\epsilon_{\text{reff}}$ ):

$$\epsilon_{\text{reff}} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left[ 1 + 12 \frac{h}{w} \right]^{-1/2}$$

$$\epsilon_{\text{reff}} = 4.2965$$

Width of patch (w):

$$w = \frac{c}{2f_0 \sqrt{\frac{\epsilon_r + 1}{2}}}$$

$$w = 11.518$$

Effective electric length of antenna:

$$L_{\text{eff}} = \frac{c}{2f_0 \sqrt{\epsilon_{\text{reff}}}}$$

$$L_{\text{eff}} = 0.009 \text{ mm}$$

The extended length of antenna ( $\Delta L$ ):

$$\frac{\Delta L}{h} = \frac{0.412(\epsilon_{\text{reff}} + 0.3) \left( \frac{w}{h} + 0.264 \right)}{(\epsilon_{\text{reff}} - 0.258) \left( \frac{w}{h} + 0.8 \right)}$$

$$\Delta L = 0.0019$$

The length of the patch is:

$$L = L_{\text{eff}} - 2\Delta L$$

$$L = 0.9008$$

The width of ground plane is:

$$W_g = 6h + w$$

$$W_g = 21.12$$

The length of ground plane is:

$$L_g = 6h + L$$

$$L_g = 18.61$$

## 3. Proposed Work

In this research the bi-polar mechanism is used for increase the efficiency and gain of the micro-strip antenna (MPA). In this mechanism dual polarity is introduced, surface current is induced. More will be the surface current induced, maximize the radiation pattern.


For design the antenna we use the MATLAB software. We take the FR-4 material with 4-8 GHz frequency, height between ground and patch is 1.6mm and the dielectric constant is taken as 4.3.

This mechanism is reducing the losses and improves the efficiency and radiation pattern. For LTE system there is low loss, high gain, less insertion loss, good VSWR.

By using Bi-polar mechanism the bandwidth is enhanced, it is 90% in the frequency range 5 – 7 GHz and the efficiency is 99% with high gain of 16.66 dBi.

## 4. Simulation Results

All the results are calculated by MATLAB software by using bi-polar mechanism. Fig. shows the frequency range and antenna bandwidth. For the proposed antenna the return loss is -20.5dB from 5.0 to 6.5 GHz and by bandwidth formula and return loss is approximately -48 dB in 6.7 GHz.

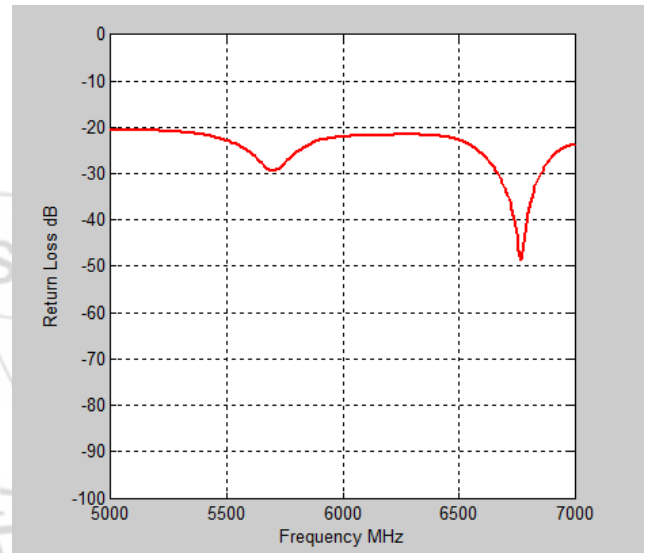

**Figure:** Frequency range and antenna bandwidth

The bandwidth of antenna is also improved about 90% in the range of 5 to 7 GHz and return loss is -48dB at 6.7 GHz. The gain for this frequency is 16.66 dB.

By using this mechanism the efficiency achieved at 6.7GHz is 99%. The efficiency of antenna is calculated in the range of 4 – 8 GHz and it is better at 6.7 GHz and the VSWR is also good. The measured value of VSWR should be less than 2 for a better performance. At 6.7 GHz the VSWR is 1.2.

## 5. Conclusion and Future Scope

The micro-strip patch antenna is implemented and simulated by MATLAB software; it is based on rectangular patch antenna by using bi-polar mechanism. A compact antenna is implemented for high gain and better antenna performance. The high efficiency is the aim of design such type of antenna by using bi-polar mechanism. Bi-polar mechanism is used to increase the surface current due to the inductance and therefore the efficiency and return loss is improved. This antenna achieved 90% bandwidth in the frequency range of 5 – 7 GHz and the efficiency of antenna is 99%. The gain of this antenna is 16.66 dB at 6.7 GHz and VSWR is less than 2 (it is 1.2) with -48dB return loss. Therefore the antenna has better performance with high gain, wide bandwidth and better efficiency. So this antenna has very useful in satellite communication by using C- Band. The proposed antenna is electronically tunable. Hence this antenna is also programmed by using microcontroller. Furthermore for

better efficiency the artificial intelligence (AI) techniques are used.

## References

- [1] Shivani Gupta and Saket Kumar, "Design and Analysis of Compact and Broadband High Gain Microstrip Patch Antennas" 2014 IEEE, 978-1-4799-6266-2/14.
- [2] Poonam Devi, "Design of Microstrip Antenna and Study of Parameters By Varying the Frequency" IJETCAS 15-687; ©2015, 14(2), September-November, 2015, pp. 120-123.
- [3] Dr Sunil Kumar and Poonam Devi, "A Review on Bandwidth Enhancement Using Smaller Microstrip Patch Antenna" IRJET, Volume 3 Issue 3, March-2016.
- [4] Design and Analysis of a Low-Profile and Broadband Microstrip Monopolar Patch Antenna. Progress in Transactions on Antennas and propagation. VOL. 61, NO. 1, pp 11-18, Jan- 2013.
- [5] Compact and broadband Micro strip stacked Patch Antenna with Circular polarization for 2.45 GHz Mobile RFID Reader. Applied Antenna and Wireless Propagation Letters Vol2, pp623-626, 2013.
- [6] Hybrid Mode Wideband Patch Antenna Loaded With a Planar Metamaterial Unit Cell Jaegeun Ha, Kyeol Kwon, Youngki Lee, and Jaehoon Choi. Progress in Transactions on Antennas and propagation. VOL.60, NO. 2, pp 1143-1147, Feb- 2012.
- [7] Enhances Return- Loss and Flat-Gain Bandwidth for Micro strip Patch Antenna. The- Nan Chang and Jyun-Ming Lin. Progress in Transactions on Antennas and propagation. VOL.59, NO. 11, pp 4322-4325, Nov-2011.
- [8] A compact micro strip patch antenna for wireless communication. U Chakraborty, S Chatterjee, S. K. Choudhry. Progress in Electromagnetic Research (PIER) M, Vol.18, pp 211-220, 2011.
- [9] Determination of dielectric constant of fabric materials and their use as substrates for design and development of antennas for wearable applications. S. Sankarlingam, Sr. member, IEEE. IEEE Transactions on instrumentation and measurement, Vol. 59, Issue 12, Dec 2010.
- [10] Sanchez-Hernandez, D. A., Multiband Integrated Antennas for 4G Terminals, Antenna and Propagation, Artech House, London, 2008.
- [11] Rashed, J. and C. T. Tai, "A new class of resonant antennas," IEEE Transactions on Antennas and Propagation, Vol. 39, 1428-1430, 1991.
- [12] Sharawi, M. S., Y. S. Faouri, and S. S. Iqbal, "Design and fabrication of a dual electrically small MIMO antenna system for 4G terminals," 2011 German Microwave Conference (GeMIC), 1-4, 2011.
- [13] Ssorin, V., A. Artemenko, A. Sevastyanov, and R. Maslennikov," Compact bandwidth- optimized two element MIMO antenna system for 2.5-2.7 GHz band," Proceedings of the 5<sup>th</sup> European Conference on Antennas and Propagation (EUCAP), 319-323, 2011.
- [14] Bhatti, R. A., S. Yi, and S. O. Park, "Compact antenna array with port decoupling for LTE-standardized mobile phones," IEEE Antennas and Wireless Propagation Letters, Vol. 8, 1430-1433, 2009.
- [15] Lizzi, L. and A. Massa, "Dual-band printed fractal monopole antenna for LTE applications," IEEE Antennas and Wireless Propagation Letters, Vol. 10, 760-763, 2011.
- [16] Abutarboush, H. F., R. Nilavalan, S. W. Cheung, K. M. Nasr, T. Peter, D. Budimir, and H. Al-Raweshidy, "A reconfigurable wideband and multiband antenna using dual-patch elements for compact wireless devices," IEEE Transactions on Antennas and Propagation, Vol. 60, 36-43, 2012.
- [17] Ankita Wadhwa, Vikas Tiwari and D. Arya, "Bandwidth Enhancement of Stacked Microstrip Patch Antenna Using Multi-dielectric Substrate" IJREAT, Volume 3, Issue, Aug-Sept, 2015.
- [18] Samir Dev Gupta and Amit Singh, "Design and Analysis of Multi-dielectric Layer Microstrip Antenna With Varying Superstrate Layer Characteristics" IJAET, Vol. 3, Issue 1, March-2012, pp. 55-68.
- [19] B. J. Kwaha, O. N Inyang and P. Amalu, "The Circular Microstrip Patch Antenna-Design and Implementation" IJRRAS, Vol. 8, Issue 1, July-2011.
- [20] D. M. Pozar, "Microstrip Antennas" IEEE, Vol. 80, Issue 1, January 1992, pp 79-81.
- [21] Ram Singh Kushwaha and D. K. Srivastava, "Bandwidth Enhancement of a Microstrip Patch Antenna with Square Shaped Parasitic Element" IJARCSSE, Vol. 3, Issue 12, December-2013.
- [22] Prajakta Umarani and Satish Bhojar, "Review of Circularly Polarized Microstrip Antennas for RFID Application" IJRSET, Vol. 5, Issue 1, January 2016.
- [23] Constantine A. Balanis (2012) "Antenna Theory- Analysis and Design" John Wiley & Sons, Inc.
- [24] T. Durga Prasad, K. V. Satya Kumar, MD Khwaja Muinuddin, Chisti B. Kanthamma, V. Santosh Kumar, "Comparisons of Circular and Rectangular Microstrip Patch Antennas" IJCEA, Vol. 02, Issue 04, July-2011.