

Review of Partial Transmit Sequence using Iterative and Modified Flipping Algorithm for PAPR Reduction in OFDM Systems on Different Channel Using Different Modulation Techniques

Himanshi Shrivastava¹, Prof. Ashish Verma²

¹PG Student, MIT Ujjain, Department of Electronics & Communication Engineering, MIT, Ujjain, Madhya Pradesh, India

²Associate Professor, MIT Ujjain, Department of Electronics & Communication Engineering, MIT, Ujjain, Madhya Pradesh, India

Abstract: *Wi-Fi Broadband services closely rely upon Orthogonal Frequency division Multiplexing (OFDM) method. OFDM has numerous blessings which makes it appropriate for high speed statistics communications. One of the important risks of OFDM is its excessive peak -to- average energy ratio (PAPR). There are different strategies to overcome this disadvantage. Partial Transmit sequence (PTS) is one in all them. on this paper, a modified model of the iterative flipping set of guidelines has been proposed i.e. modified Flipping PTS (M-PTS) on AWGN, RAYLEIGH and RICIAN channel using different modulation which reduces the general overall performance gap.*

Keywords: OFDM, PAPR, PTS, I-PTS, QPSK, M-PTS etc

1. Introduction

Orthogonal Frequency division Multiplexing (OFDM) has diverse blessings such as higher spectral overall performance, much less sensitivity to sample timing offsets, robustness with appreciate to multi-direction fading, excessive immunity to inter-image interference and capability to control up with frequency selective fading of wideband conversation with tolerable complexity. those factors makes OFDM healthful for incorporating in numerous wireless technology like virtual Video Broadcasting(DVB-T), wireless LAN, long time Evolution (LTE) and so forth[1]. OFDM has diverse poor components too .It has noise like amplitude, with a very huge dynamic variety and it is greater sensitive to provider frequency offset and float as compared to single carrier structures. Due to that, it suffers from the trouble of high peak to average power ratio (PAPR), which reduces the performance of high power Amplifier (HPA) at transmitter end. PAPR forces the HPA to function beyond its most acceptable linear variety, which ends up nonlinear distortion inside the transmitted signal. PAPR may be decreased via numerous methods like Coding, Interleaving, and Selective Mapping (SLM), Partial Transmit series (PTS), Tone Reservation and Tone Injection and so on. [2].PAPR reduction strategies may be categorized into two classes:

- 1) Which reduce PAPR earlier than modulation.
- 2) That reduces PAPR after modulation.

This paper analyzes the complexity aspect in Partial Transmit SEQUENCE (PTS) and offers an efficient algorithm which reduces complexities and could increases performance of the OFDM device on extraordinary channel the usage of special modulation techniques. The paper offers usual overall performance assessment for PAPR reduction in OFDM system; the use of M-Flipping set of rules the usage of different channels. In section II, basics of Orthogonal

Frequency division Multiplexing (OFDM) has been discussed. Segment III deals with CCDF, In segment IV fundamentals of Partial Transmit sequence method has been discussed. In phase V PAPR analysis the usage of modified flipping set of rules mentioned and conclusion has been discussed in segment V1.

2. Fundamentals of OFDM Signals

Orthogonal Frequency Division Multiplexing (OFDM) has been introduced, (OFDM) is multi-carrier modulation (MCM) Scheme technique used for 4th Generation (4G) wireless communication in Which a source signal will be split into several narrowband channels at different frequencies such as the block of N data symbols $\{X_n, n=0,1,\dots,N-1\}$ that forms the one OFDM signal, is transmitted .Figure(1) shows the block diagram of OFDM signal in which the bit stream is divided in to various orthogonal sub-carriers , each of which modulated at low rate [3] . Each OFDM signals modulates a different sub-carrier from set $\{f_n, n=0,1,\dots,N-1\}$. The N sub-carrier is orthogonal to each other, i.e, $f_n = n\Delta f$. where $\Delta f = \frac{1}{NT}$ and T = symbol period, multicarrier signal consisting of N sub-carrier is as follows:

$$X_n = \frac{1}{\sqrt{N}} \sum_{n=0}^{N-1} X_n e^{j2\pi nft} \quad \dots \quad (1)$$

Where, $0 \leq t \leq T$, Due to the multi carrier modulation scheme OFDM will reduce The loss of information at the receiver end. Hence, it reduces the retransmission rate, which in results low power consumption, less time and cheaper in cost.

PAPR of transmitted signal is given as:

$$PAPR = \frac{\text{PEAK POWER}}{\text{AVERAGE POWER}} = \frac{\max\{|x(n)|^2\}}{E\{|x(n)|^2\}} \quad \dots \quad (2)$$

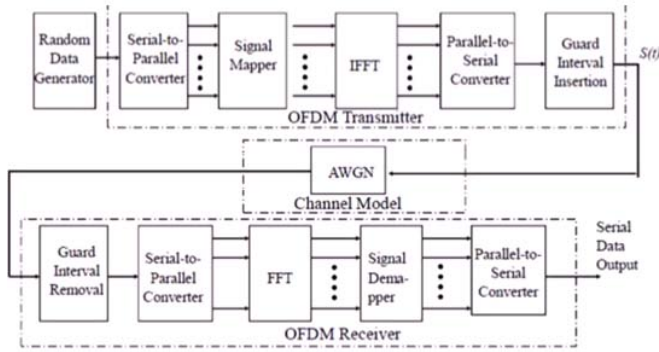


Figure 1: The block diagram of OFDM system.

3. Complementary Cumulative Distribution function (CCDF)

CCDF calculates the possibility that the PAPR of a data block exceeds a given threshold $PAPR_0$ and be computed through Monte Carlo Simulation [4].

In order to extract useful information from this noise-like signal, we need a statistical description of the power levels in this signal, and a CCDF curve gives just that. A CCDF curve shows how much time the signal spends at or above a given power level. The power level is expressed in dB relative to the average power.

From the central limit theorem, for large number of values of N , the real and imaginary values of $x(t)$ becomes Gaussian distributed. The amplitude of the OFDM signal, therefore, has a Rayleigh distribution with zero mean and a variance of N times the variance of one complex sinusoid. The Complementary Cumulative Distribution feature (CCDF) of the PAPR of N symbols of a records block with Nyquist sampling rate is defined as

$$P_r(PAPR \geq PAPR_0) = 1 - P_r(PAPR \leq PAPR_0) = 1 - (1 - e^{-PAPR_0})^N \dots \dots \dots (3)$$

4. Partial Transmit Sequence

In partial transmit sequence. The whole data block is partitioned X into M disjoint sub-blocks as $X = [X_0, X_1, \dots, X_{N-1}]^T$ and then calculating individual IFFT'S as

$$[X_m = X_{m,0}, X_{m,1}, \dots, X_{m,N-1}]^T \dots \dots \dots (4)$$

Where $m=1, 2, \dots, M$.

Then, a lot of these disjoint units are multiplied with random section vector that is given in Block diagram in figure 2.

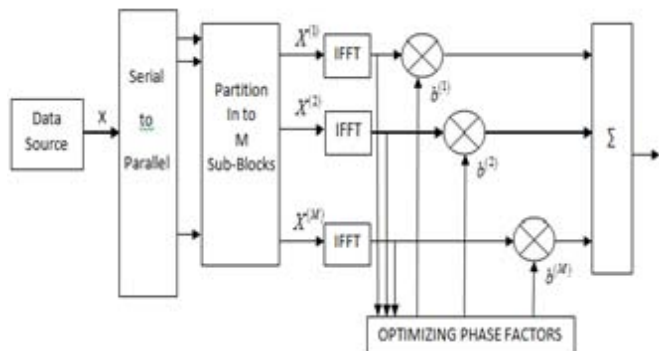


Figure 2: block diagram of partial transmit sequence

The phase rotation vectors b_1, b_2, \dots, b_M are expanded with the above generated disjoint subsets. That is the level, wherein section optimization strategies are hired to lower the PAPR of the sign. After this, most effective the sets which have most efficient phase vectors with lowest PAPR are transmitted.

PTS technique involves choice of OFDM signal with lesser PAPR sets, outcomes extra complicated in nature. So, the transmitter needs to track the records of the sent data blocks. There are three sorts of sub-block partitioning scheme: adjoining, interleaved and pseudo-random partitioning. The input signal (candidate signal) is the sum of the product of segment rotation vector and corresponding sub-block. For that reason, the candidate signal is given by

$$X^c = \sum_{m=1}^M b_m X_m \dots \dots \dots (5)$$

Where $c=1, 2, \dots, c$

Drawback of PTS

The main issue with PTS technique is its complexity because it requires an exhaustive search over all the combinations of allowed phase factors [5], And because of this, the complexity will increase exponentially with respective the number of sub-blocks. Sub-block partitioning additionally impacts the PAPR reduction overall performance in PTS. The PTS approach works with an arbitrary variety of sub-carriers and any modulation scheme.

5. PAPR Analysis Using Modified Flipping Algorithm

A suboptimal approach for PAPR reduction called modified iterative flipping (M-Flipping) algorithm has been proposed on this phase, which give better performance than different strategies like iterative flipping technique (I-PTS) and OFDM, which we have discussed on this paper. among various PAPR reduction strategies for OFDM signals as referred to in literature, the PTS is very promising because it does gives rise to not any type of signal distortion. however because of its high complexity, it's far very lots difficult to apply it in a practical system Cimini and Sollenberger [7] proposed an iterative flipping algorithm (I-Flipping) , wherein complexity difficulty of the PTS approach has been mentioned and resolved.

Following steps are concerned in sub-optimal scheme known as I-Flipping algorithm:

- 1) The enter statistics S can be partitioned into M disjoint sub-blocks as we do in the PTS scheme.
- 2) In each sub-block, LN -point IDFT is implemented and outcomes that M PTSs will be generated.
- 3) Set $b_l = 1$ for all l and we are able to upload the M -PTSs together and PAPR could be calculated.
- 4) Set $b_l = -1$ after which PAPR might be computed again. If the calculated PAPR is smaller than that within the preceding step, $b_l = -1$ should be retained; otherwise, b_l may be reverted lower back. This operation is known as flipping.
- 5) The set of rules could be repeated until all M bits were explored.

Computational complexity has been significantly reduces after making use of I-Flipping set of rules. The new release wide variety C is reduced to the number of sub-blocks, i.e.

$$C = M.$$

A) Proposed Modified Flipping Algorithm Technique

Proposed modified Flipping set of rules method of iterative flipping algorithm for PAPR reduction in OFDM systems has been mentioned in [8]. Despite the fact that the I-Flipping algorithm substantially reduces the complexity of the PTS, however a few overall performance gaps still present among the normal PTS and the I- flipping algorithm. The M-Flipping technique partitions the formed PTSs into even and odd range of corporations after which flipping operation will be applied in to institution via organization. Assume that D1 denote a group together with 4 PTSs of odd numbers and D2 a group such as 4 PTSs of even numbers, for $M = 8$ sub-blocks. Two corporations of four PTSs are fashioned after acting IDFT operations. For partitioning of PTSs, adjoining partition scheme has been used. After that the best combination of phase collection may be decided on according to the enter records which gives the values of minimum PAPR.

The proposed M-Flipping algorithms are as follows.

- 1)The input facts S could be partitioned into M disjoint sub-blocks as we do inside the PTS scheme.
- 2)In every sub-block, LN-factor IDFT is applied and outcomes that M PTSs can be generated. 3) Set $bl= 1$ for all l and PAPR will be calculated after adding the PTSs collectively.
- 3)Arrange the PTSs in to descending order.
- 4)All M disjoint sub-blocks might be partitioned into two groups wherein each group includes 4 PTSs.
- 5)First institution Q1 consist of PTS1, PTS3, PTS5, PTS7 and second organization Q2 encompass PTS2, PTS4, PTS6, and PTS8. Multiply Q2 with -1.
- 6)Take x_1 as summation of all four PTSs of group Q1, and x_2 as summation of all four PTSs of group Q2.
- 7)Sooner or later, add x_1 and x_2 and take minimum value of PAPR.

For in addition reduction within the computational complexity a PAPR threshold parameter can be used too. It way that if the PAPR drops underneath the given threshold, the proposed M-Flipping algorithm can be terminated. The receiver must have the facts and facts approximately the collection and section factor, which have been used to generate the sign. in order that unique information can be recovered and the used collection with phase thing may be transmitted as aspect records in OFDM device.

6. Conclusion

In this paper, a brand new algorithm M-flipping has been proposed for PAPR reduction in OFDM system and compared with original OFDM, PTS and that i-Flipping scheme, Using different channel like AWGN, RAYLEIGH and RICIAN etc.

Efficient PAPR reduction scheme is one which reduces the PAPR to minimal without affecting a great deal to the performance and also with low implementation value and need to be key to future Wi-Fi excessive velocity communication systems.

References

- [1] M. Singh and S. K. Patra, "Analysis of PAPR Reduction Schemes in LTE-OFDM System," in *IEEE International Conference on Ad-vanced Research in Engineering and Technology (ICARET 2013, India)*, pp. 568–571, 2013.
- [2] S. H. Han and J. H. Lee, "An overview of peak-to-average power ratio reduction techniques for multicarrier transmission," *IEEE Wireless Communications*, no. April, pp. 56–65, 2005.
- [3] Ramjee Prasad, *OFDM for Wireless Communications Systems*. Artech House Universal Personal Communications Library, 2004.
- [4] S. Muller and J. Huber, "OFDM with reduced peak-to-average power ratio by optimum combination of partial transmit sequences," *Electronics Letters*, vol. 33, no. 5, pp. 368–369, 1997.
- [5] C. Tellambura, "Improved phase factor computation for the PAR reduction of an OFDM signal using PTS," *IEEE Communications Letters*, vol. 5, pp. 135–137, Apr. 2001.
- [6] Y. S. Cho, J. Kim, W. Y. Yang, and Chung G. Kang, *MIMO-OFDM wireless communications with MATLAB*. John Wiley & Sons, Inc., 2010.
- [7] L. Cimini and N. Sollenberger, "Peak-to-average power ratio reduction of an OFDM signal using partial transmit sequences," *IEEE Communications Letters*, vol. 4, pp. 86–88, Mar. 2000.
- [8] G. Zhu and T. Jiang, "Extended iterative flipping algorithm for PAPR reduction in OFDM systems," in *2008 IEEE Third International Conference on Communications and Networking in China*, pp. 1018–1022, 2008.