

Study of Radon Mass Exhalation Rates from Soil Samples Collected from Oil Exploration Areas in Mizoram, India

Remlalsiama¹, Lalmuanawma Chhangte², Lalnunpuia³

¹Department of Physics, Govt. Zirtiri Residential Science College, Aizawl, Mizoram, India

²Department of Physics, Lunglei Govt. College, Lunglei, Mizoram, India
Corresponding Author Email: [muana.chhangte\[at\]gmail.com](mailto:muana.chhangte[at]gmail.com)

³Department of Physics, Govt. Champhai College, Champhai, Mizoram, India

Abstract: *The present study investigates radon mass exhalation rates from soil samples collected from oil exploration areas located in Aizawl, Kolasib, and Serchhip districts of Mizoram, India. Measurements were carried out using the scintillation-based Smart RnDuo radon detector. The measured radon mass exhalation rates in Aizawl district ranged from 4.72 to 58.11 mBq/kg/h with an average value of 30.47 mBq/kg/h, while those in Kolasib district ranged from 0.92 to 51.97 mBq/kg/h with an average value of 25.91 mBq/kg/h. The oil exploration areas showed values ranging from 7.04 to 23.43 mBq/kg/h with an average value of 12.40 mBq/kg/h. The overall average radon mass exhalation rate was found to be 22.93 mBq/kg/h. Grain size distribution analysis indicated that radon exhalation tends to be higher in samples with more uniform grain size distribution. The results provide baseline information on environmental radioactivity and may be useful for future radiation safety studies in Mizoram.*

Keywords: Radon, Radon mass exhalation rate, Soil, Oil exploration area, Smart RnDuo, Environmental radioactivity, Mizoram.

1. Introduction

Primordial radionuclides such as ²³⁸U and ²³²Th are found in traces almost in every soil, rocks and water on earth. They usually have a very long half-life and continuously decay into another radioactive element, hence forming a decay chain. Radon, a decay product of ²³⁸U, is a highly radioactive, colourless, chemically inert gas and is one of the main sources of radiation exposure to human beings (UNSCEAR, 2000). Of the total radiation received by humans, the contribution of radon and its decay products is 51% through inhalation and 0.21% through ingestion (Kumar *et al*, 2017; Gusain *et al*, 2009). Due to its short half-life, radon continuously disintegrates into its progeny, thereby releasing alpha particles. The three main progenies of radon, namely, polonium, lead and bismuth have extremely short half-life and this makes radon extremely hazardous (Majumdar, 2000, Ahmad *et al*, 2014).

Radon is being continuously formed in the soil and released in air. Radon formed in the soil enters into the pore spaces of soil grains by a process called emanation and then escapes into the environment by a process known as exhalation (Elzain, 2015, Al-Saadi *et al*, 2015). Exhalation mainly depends on the type of soil, its grain size distribution, porosity and the water content of the soil.

Radon and its isotopes have been identified as the second leading cause of lung cancer after tobacco smoking (Hassan *et al*, 2011, Mujahid *et al*, 2010). Hence, estimation of radon mass exhalation rate is important to give a useful reference against radiation safety measures and to create a baseline for further studies.

The present work aims to measure the radon mass exhalation rate and also to determine grain size distribution for classification of soil samples collected from all the oil exploration areas within Aizawl district, Kolasib district and Serchhip district of Mizoram. Mizoram is one state in the north-eastern part of India. The main instruments for the study is by utilizing a scintillation-based radon detector Smart RnDuo.

2. Study Area

Mizoram is located in the North Eastern part of India. There are altogether six major oil exploration areas in Mizoram such as Phulmawi, Maubuang and Keifang area located at Aizawl district; Meidum and Zanlawn area located at Kolasib district; and Thenzawl area located at Serchhip district respectively.

Phulmawi area stretches from 23°35'29.9" N to 23°35'33.1" N and between 92°51'23.0" E to 92°51'25.0" E with an elevation range of 2900 ft and 2956 ft from sea level. That of Maubuang area stretches from 23°29'42.7" N to 23°29'47.3" N and between 92°42'3.6" E to 92°42'5.8" E with an elevation range of 2870 ft and 2885 ft from sea level. Keifang area stretches from 23°39'12.5" N to 23°39'14.2" N and between 92°57'0.9" E to 92°57'1.7" E with an elevation range of 2915ft to 2927ft from sea level. Thenzawl area stretches from 23°18'08.3" N to 23°18'12.4" N and between 92°42'5.8" E to 92°47'11.9" E with an elevation range of 2454 ft and 2483 ft from sea level. That of Meidum area stretches from 24°10'11.8" N to 24°10'12.9" N and between 92°35'55.4" E to 92°35'58.8" E with an elevation range of 291ft to 331ft from sea level. And that of Zanlawn area stretches from 23°59'01.0" N to 23°59'02.6" N and

between 92°42'47.8" E to 92° 42'50.8" E with an elevation range of 2110 ft and 2900 ft from sea level.

The Fig.1 shows the location maps of all the oil exploration areas in Mizoram.


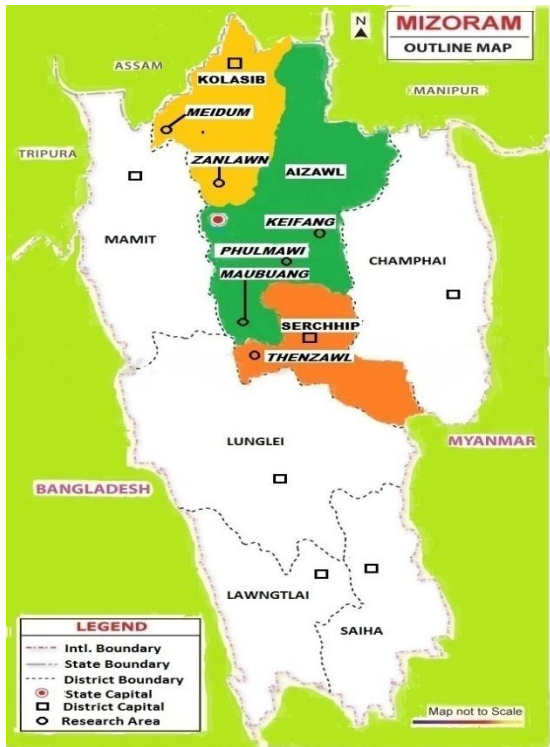


Figure 1: Geographical Map of Mizoram showing different Oil Exploration areas


3. Materials and Methods

3.1 Measurement of Radon Mass Exhalation rate

The measurement of radon mass exhalation rate in collected soil samples was carried out by using a scintillation- based radon monitor Smart RnDuo. RnDuo is an advanced portable continuous radon /thoron monitor, whose detection principle is based on detection of alpha emitted from radon and its decay products formed inside a scintillation cell volume, and has multiple applications in radon and thoron studies (Amanjeet *et al*, 2018). The instrument consists of a progeny filter and a thoron discriminator which eliminates radon/thoron progenies and thoron from entering the scintillation chamber. The alpha scintillations from radon and its decay products formed inside the cell are continuously counted by the PMT and the associated counting electronics. The instrument has an in-built algorithm to continuously measure radon concentration. The measured radon concentration is then processed by a microprocessor unit as per the developed algorithm to display the concentration of radon (Fig. 2).

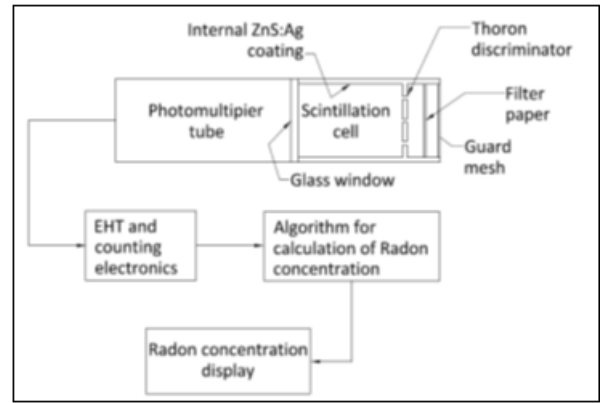

(i)

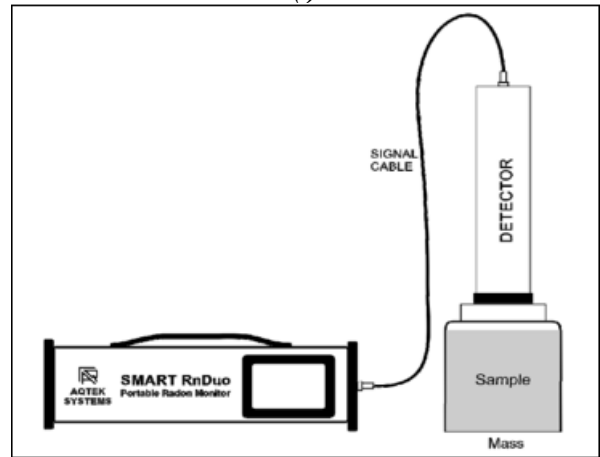

(ii)

Figure 2: (i) Schematics of radon measurement process in RnDuo. (ii) Measurement of radon mass exhalation from soil.

For measuring radon mass exhalation rate, the sample was first weighed and its volume taken, and then put inside the radon mass exhalation chamber. The detector is then mounted on top of the exhalation chamber (Fig. 2), and radon build up data were recorded every 60 minutes for a period of about 10-24 hours. The readings for 10 consecutive hours is taken out of the 24 hrs. This is done to ensure that the readings are accurate. Least square fitting of the data obtained was carried out using the equation (Lekshmi *et al*, 2018):

$$C(t) = \left(\frac{J_m M}{V} \right) t + C_o$$

Where C (t) is ²²²Rn concentration (Bq m⁻³) at time t, C_o is the ²²²Rn concentration (Bq m⁻³) present in the chamber volume at t = 0, M is the total mass of the dry sample (Kg).

V is the effective volume (volume of detector + porous volume of sample + residual air volume of mass exhalation chamber) (m³).

The porous volume (V_p) can be estimated using the following equation

$$V_p = V_s - \left(\frac{M}{\rho_g} \right)$$

Where V_s is the sample volume in the mass exhalation chamber, ρ_g is the specific gravity of the sample and t is the measurement time (h).

On least square fitting of the data to the above equation, one may obtain J_M from the fitted parameters with the information of the mass M of the sample.

3.2 Soil Classification and grain size distribution

Sample soil classification was carried out by adapting the United States Department of Agriculture (USDA) textural soil classification system. It consists of three main primary classifications, namely, sand, silt and clay. These three classifications are further divided into 12 classes. A

triangular plot, called the USDA triangle was employed for this purpose (García-Gaines *et al*, 2015).

Sample soils were first dried and then sieved using a mechanical sieve shaker for a period of 20-30 minutes. Five different sieves of sieve mesh number, namely, 60 (grain size 0.25 mm which corresponds to medium sand), 120 (grain size 0.125 mm which corresponds to fine sand), 230 (grain size 0.0625 mm which corresponds to very fine sand), 325 (grain size 0.044 mm which corresponds to silt/mud) and >325 (grain size smaller than 0.044 mm which corresponds to clay) was used to identify the grain size distribution. Percentage of the grain size distribution obtained was then plotted using the USDA triangular plot.

4. Results and Discussion

Table 1: Determination of grain size distribution and measurement of radon mass exhalation rate from soil samples collected from all oil exploration areas of Mizoram.

Location	J_M (mBq/kg/h)	Grain Size Distribution				
		60 (%)	120 (%)	230 (%)	325(%)	>325(%)
Maubuang-1	19.12	71	130.9	36.2	10.5	18.8
Maubuang-2	23.49	17.3	114.2	47	15.2	39.7
Maubuang-3	7.27	73	108.3	41.2	3.5	10.3
Keifang-1	15.62	97.9	118.1	14.5	6.5	17.3
Keifang-2	9.99	67.9	108.6	29.7	15.3	19.1
Keifang-3	11.24	120	166.3	11.4	2.2	1.9
Phulmawi-1	11.76	99	95	43.8	26.9	46.5
Phulmawi-2	7.62	86.9	112.6	36.1	14.8	37.4
Phulmawi-3	16.98	83.6	99.3	34.1	11.6	26.4
Thenzawl-1	19.82	95.5	237.2	113.5	94.1	93.5
Thenzawl-2	9.42	71.3	381.7	46.1	18.6	37
Thenzawl-3	9.89	91.9	314.2	91.2	56.3	87.1
Zanlawn-1	13.89	209.4	265.7	9.4	12.2	36.8
Zanlawn-2	17.88	358.1	223.2	76.5	42.4	45.1
Zanlawn-3	9.13	379.5	207	58.4	87.6	49.6
Meidum-1	17.74	453.8	150.2	16.1	18	22.3
Meidum-2	7.09	364.2	108.3	26.2	5.8	14.5
Meidum-3	7.04	557.1	227.4	60.7	20	36.2

Table 1 gives the results of measurement of radon mass exhalation rates and grain size distribution in soil samples collected from 18 different locations within the study area. All the soil samples were found to be distributed mainly among medium, fine and very fine sand. Radon exhalation was found to be mainly higher in samples having uniform grain size distribution. The measured values of radon mass exhalation rate in Aizawl district ranged from 4.72 mBq/kg/hr to 58.11 mBq/kg/hr, with an average value of 30.47 mBq/kg/hr. In Kolasib district, the radon mass exhalation rate ranged from 0.92 mBq/kg/hr to 51.97 mBq/kg/hr, with an average value of 25.91 mBq/kg/hr. In the present study of oil exploration areas in Mizoram, the radon mass exhalation rate ranges from 7.04 mBq/kg/hr to 23.43 mBq/kg/hr, with an average value of 12.40 mBq/kg/hr. The overall average of radon mass exhalation rate in Kolasib district, Aizawl district and oil exploration areas was found to be 22.93 mBq/kg/hr.

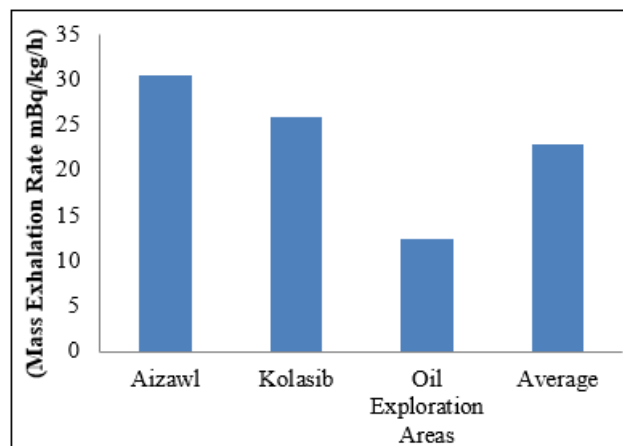


Figure 3: Comparison of the average values of radon mass exhalation rate in Aizawl District, Kolasib District and Oil exploration areas in Mizoram along with the overall average radon mass exhalation rate.

Figure 3 shows the comparison of the average values of radon mass exhalation rate in soils collected from Aizawl district, Kolasib district and Oil exploration areas in Mizoram along with the overall average radon mass exhalation rate. It had been found that the radon mass

exhalation rate in Oil exploration areas is lower than that in Aizawl District and Kolasib District.

5. Conclusion

This study presents measurements of radon mass exhalation rates from soil samples collected from oil exploration areas of Mizoram using the Smart RnDuo radon detector. The measured exhalation rates varied among different districts, with the oil exploration areas exhibiting comparatively lower average values than Aizawl and Kolasib districts. The results also indicate that radon exhalation tends to be higher in samples with more uniform grain size distribution. The data generated in this work provide valuable baseline information on environmental radioactivity in Mizoram and may support future radiation monitoring, environmental assessment, and public health studies in the region.

References

- [1] UNSCEAR (2000). United Nations Scientific Committee on the effects of atomic radiation: Sources and effects of ionizing radiation. United Nations, New York.
- [2] Kumar, Manish, Sarin, Amit, Sahoo B.K., Sharma, Navjeet (2017). Measurement of radon concentration in the drinking water and assessment of age dependent ingestion dose to local population in Kapurthala district of Punjab, India. *Journal of Environmental Bioscience*, Vol. 31(2), 479-484
- [3] Majumdar, D. (2000). Radon in the Environment and Associated Health Problems. *Resonance*, Vol. 5(7), 44-55.
- [4] Hassan, Nabil M., Tokonami, Shinji, Fukushi, Masahiro (2011). A simple technique for studying the dependence of radon and thoron exhalation rate from building materials on absolute humidity. *Journal of Radioanalytical and Nuclear Chemistry*, Vol. 287(1), 185-191.
- [5] Gusain G.S., Prasad, Ganesh, Prasad, Yogesh, Ramola, R.C. (2009). Comparison of indoor radon level with radon exhalation rate from soil in Garhwal Himalaya. *Radiation Measurements*, Vol. 44(9), 1032-1035.
- [6] Ahmad, Nisar, Jaafar, Mohamad Suhaimi, Khan, Sohail Aziz (2014). Correlation of radon exhalation rate with grain size of soil collected from Kedah, Malaysia. *Science International*, Vol. 26 (2), 691-696.
- [7] Lekshmi R., Arunima S., Jojo P.J. (2018). Determination of radon exhalation rates and emanation factor of some soil samples collected from southern seashore of Kerala, India. *JUSPS-A*, Vol. 30(1), 80-85.
- [8] Mujahid S.A., Hussain S., Ramzan M. (2010). Measurement of radon exhalation rate and soil gas radon concentration in areas of southern Punjab, Pakistan. *Radiation Protection Dosimetry*, pp. 1-4.
- [9] Khan M., Shakir, Naqvi A.H., Azam A., Srivastava D.S. (2011). Radium and radon exhalation studies of soil. *Iran. Journal of Radiation Research*, Vol. 8(4), 207-210.
- [10] Amanjeet, Kumar, Ajay, Kumar, Suneel (2018). Measurements of mass and surface exhalation rate from soil of eastern Haryana, India. *International Journal of Applied Engineering Research*, Vol. 13(5), 2181-2186.
- [11] Elzain, Abd-Elmoniem A. (2015). Determination of Radium concentration and radon exhalation rate in soil samples using CR-39. *Advanced Applied Scientific Research*, Vol. 6(2), 96-102.
- [12] Abbas J. Al-Saadi, Abdalsattar K. Hashim, and Hayder J. Musa, (2015). "Determination of Radium and Radon Exhalation Rates in Soil Samples Collected from Kerbala Governorate." *International Journal of Physics*, Vol.3(5), 208-212.
- [13] García-Gaines, Rubén A., Frankenstein, Susan (2015). USCS and the USDA Soil Classification System: Development of a Mapping Scheme. ERDC/CRREL Technical Report-4 pp 5-7