

# Productivity Analysis of AODV and DSDV Routing Protocols In MANETs

A Udaya Kumar<sup>1</sup>, V Lakshmana Rao<sup>2</sup>, K Purushotam Naidu<sup>3</sup>, S Sagar<sup>4</sup>

Department of Computer Science Engineering  
<sup>1, 2, 3</sup>Gayatri Vidya Parishad College of Engineering for Women  
uday\_ist@yahoo.com, lakshman.vadala@gmail.com, purushotam.k30@gmail.com

<sup>4</sup>Gayatri Vidya Parishad College of Engineering (Autonomous)  
Visakhapatnam, Andhra Pradesh, India  
ssagar@gvpce.ac.in

**Abstract:** *The study of routing protocols in MANETs is one that requires a great deal of research due to the challenges it poses as a consequence of continuous mobility and lack of infrastructure. Several factors such as throughput, packet delivery ratio, end to end delay, overhead and so on need to be considered to decide upon the most suitable protocol for Ad hoc communication. Basically, the routing protocols of MANETs can be categorized as proactive and reactive. In this paper, our main focus has been to select a category of protocol out of two (i.e. proactive & reactive). For this we have selected, implemented and analyzed the best protocols of these categories and compared the results, using NS2, NAM and AWK. The protocols that we have selected are DSDV and AODV from proactive and reactive categories respectively, based on their relative advantages and disadvantages in comparison to the other protocols of their category.*

**Keywords:** AODV, AWK, DSDV, MANET, NS2

## 1. Introduction

MANET is the acronym for Mobile Adhoc Networks. It can be defined as an autonomous system of mobile devices connected by wireless links. It is characterized by a lack of fixed infrastructure, dynamically changing topology, unexpected and unrestricted entry, exit and movement of the devices, energy and bandwidth constraints and an interoperation with the internet. Each device in a MANET acts as both a node and a router and carries routing information. They relay data packets from source to destination by communicating with their neighbors.

It has wide applications in the areas like military, civilian applications (such as in taxis, meeting rooms, sports stadiums, boats and chartered planes etc.) and Personalized area networks (such as in small movable devices like cell phones, laptops, headsets, wrist watches etc.).

Though MANETs have a large number of applications, their efficiency in them is affected by a few issues. These issues or drawbacks include wireless communication – makes the transmission unreliable and bandwidth constrained, mobility – involves partitioning of a network that constantly changes, which is a highly tedious task and portable equipment – due to small size and light weight such equipment often suffers from lack of resources like sufficient memory and power backup or battery life [1].

## 2. Routing Categories

Since the advent of Defense Advanced Research Projects Agency (DARPA) packet radio networks in the early 1970s, numerous protocols have been developed for ad hoc mobile networks. Such protocols must deal with the typical limitations of these networks, which include high

power consumption, low bandwidth, and high error rates [2].

Routing as such involves two basic steps. Firstly, finding the most appropriate path between the source and destination via certain intermediate nodes and secondly, the transfer of data packets using this path. Depending on the manner in which these two steps are contemplated, as mention earlier, routing has been classified as

### A. Proactive routing

In proactive routing fresh lists of destinations and their routes are maintained by periodically distributing routing tables throughout the network [3]. Here routing information is computed and shared and the path is set prior to the actual transfer of data packets between the source and destination.

In the proactive routing scheme we are able to conveniently send the data packets across as everything is planned before hand. But, it requires that each and every node in the network have the capacity to store all the routing information. Also, if the network changes its topology very rapidly our planning may fail. Examples of these kind protocols are OLSR, DSDV, and CGSR etc.

### B. Reactive routing

In reactive routing routes are found on demand by flooding the network with route request packets. Here the source initiates the data transfer process by issuing a route request, the most relevant immediate neighbor issues a route reply to this request and takes forward the data transfer process. This happens till the destination is reached and the data packet received [3].

In the reactive routing scheme we are able to overcome all shortcomings of the proactive routing scheme. But, this scheme may suffer from high latency time for finding

routes. Also, excessive flooding may lead to network clogging. Examples of these kind protocols are AODV, AOMDV, DSR, TORA and CBRP etc.

### 3. Routing Protocols

A routing protocol is a set of rules guiding how routers communicate with each other. As mentioned earlier our work includes the thorough study of two protocols which have been discussed in details below.

#### C. A. Destination-Sequenced Distance-Vector (DSDV) Routing protocol

The Destination-Sequenced Distance-Vector (DSDV) Routing Algorithm is based on the idea of the classical Bellman-Ford Routing Algorithm with certain improvements [3]. Every mobile station maintains a routing table that lists all available destinations, the number of hops to reach the destination and the sequence number assigned by the destination node. The sequence number is used to distinguish stale routes from new ones and thus avoid the formation of loops. The stations periodically transmit their routing tables to their immediate neighbors. A station also transmits its routing table if a significant change has occurred in its table from the last update sent. So, the update is both time-driven and event-driven. The routing table updates can be sent in two ways:- a "full dump" or an incremental update. A full dump sends the full routing table to the neighbors and could span many packets whereas in an incremental update only those entries from the routing table are sent that has a metric change since the last update and it must fit in a packet. If there is space in the incremental update packet then those entries may be included whose sequence number has changed. When the network is relatively stable, incremental updates are sent to avoid extra traffic and full dump are relatively infrequent. In a fast-changing network, incremental packets can grow big so full dumps will be more frequent. Each route update packet, in addition to the routing table information, also contains a unique sequence number assigned by the transmitter. The route labeled with the highest (i.e. most recent) sequence number is used. If two routes have the same sequence number then the route with the best metric (i.e. shortest route) is used. Based on the past history, the stations estimate the settling time of routes. The stations delay the transmission of a routing update by settling time so as to eliminate those updates that would occur if a better route were found very soon [10].

#### D. B. Adhoc On demand Distance Vector routing protocol

AODV is a packet routing protocol designed for use in mobile ad hoc networks. It is intended for networks that may contain thousands of nodes. It is one of a class of demand-driven protocols. The route discovery mechanism is invoked only if a route to a destination is not known. Source, destination and next hop are addressed using IP addressing. Each node maintains a routing table that contains information about reaching destination nodes. Each entry is keyed to a destination node. Routing table

size is minimized by only including next hop information, not the entire route to a destination node. Sequence numbers for both destination and source are used. Managing the sequence number is the key to efficient routing and route maintenance. Sequence numbers are used to indicate the relative freshness of routing information. Updated by an originating node, e.g., at initiation of route discovery or a route reply. It is observed by other nodes to determine freshness [4] [13].

AODV is an on-demand protocol, which initiate route request only when needed. When a source node needs a route to certain destination, it broadcasts a route request packet (RREQ) to its neighbors. Each receiving neighbor checks its routing table to see if it has a route to the destination. If it doesn't have a route to this destination, it will re-broadcast the RREQ packet and let it propagate to other neighbors. If the receiving node is the destination or has the route to the destination, a route reply (RREP) packet will be sent back to the source node. Routing entries for the destination node are created in each intermediate node on the way RREP packet propagates back. A hello message is a local advertisement for the continued presence of the node.

Neighbors that are using routes through the broadcasting node will continue to mark the routes as valid. If hello messages from a particular node stop coming, the neighbor can assume that the node has moved away. When that happens, the neighbor will mark the link to the node as broken and may trigger a notification to some of its neighbors telling that the link is broken [9]. In AODV, each router maintains route table entries with the destination IP address, destination sequence number, hop count, next hop ID and lifetime. Data traffic is then routed according to the information provided by these entries [5][6].

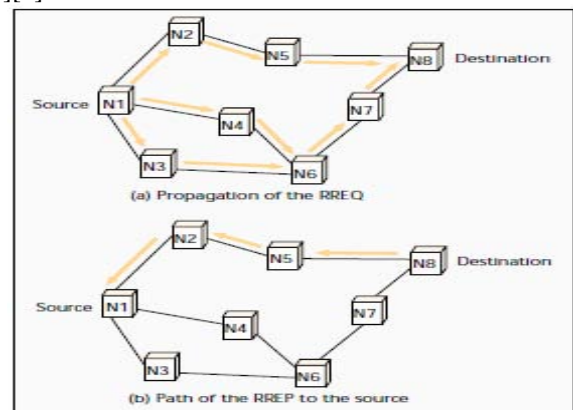


Figure 1: AODV route discovery

### 4. Simulation Setup

The protocols to be implemented and analyzed and the tools to be used for this implementation and analysis have been selected by a thorough study of the reference papers mentioned in the later portions of this text. We have discussed pervasively about the protocols and now we will be discussing the tools in the same way.

We begin with simulation for which we use the second version of Network Simulator (NS2) [15]. The simulation process involves the creation of a Tool Command Language (TCL) [18] file that makes a setup of the scenario, meaning to say it specifies in it the required features of the network such as number of nodes, kind of agents working on the nodes and so on. After creating such a file, it needs to be run. This marks the generation of the desired network. NS2 is an open source software and extremely user friendly and so the most appropriate tool in our context.

Simulation is followed by a display of the working of the network with the protocols. This is done by using Network Animator (NAM). NAM is a TCL/TK based animation tool for viewing network simulation traces and real world packet traces. It supports topology layout, packet level animation and various other data inspection tools [12].

Finally for analysis we need to run some AWK (Aho Weinberger Kernighan – family names of its authors) scripts that lead to xgraphs. The AWK utility is a data extraction and reporting tool that uses a data-driven scripting language consisting of a set of actions to be taken against textual data (either in files or data streams) for the purpose of producing formatted reports. The language used by awk extensively uses the string data type, associative arrays (that is, arrays indexed by key strings), and regular expressions. The xgraphs so produced for the performance parameters for the two protocols are compared and conclusions are made.

These simulations are using AODV, DSDV that will be tested on Random Waypoint Mobility Model scheme. The simulation periods for each scenario are conduct in 10 seconds and the simulated mobility network area is 800 m x 800 m rectangle with 250m transmission range.

Parameter Type	Parameter Value
Protocols	AODV ,DSDV
Simulation Time	10s
Number of Nodes	50
Network Load	4 Packets / sec
Pause Time	0
Environment Size	800m x 800 m
Traffic Type	Constant Bit Rate
Maximum Speed	10 m / s
Mobility Model	Random Waypoint
Network Simulator	NS 2.34
Platform	Linux Fedora

Table 1: Simulation Setup

## 5. Performance Metrics

The conclusions have been made by taking into consideration the following performance parameters [20].

### E. End-To-End Delay (Delay)

It refers to the time taken for a packet to be transmitted across a network from source to destination.

$$\text{Delay} = \frac{\sum i [\text{time when packet}(i)\text{received} - \text{time when packet}(i)\text{sent}]}{\sum i \text{count packet}(i)}$$

### F. Throughput (t)

It is the average rate of successful message delivery over a communication channel. This data may be delivered over a physical or logical link, or pass through a certain network node. The throughput is usually measured in bits per second (bit/s or bps), and sometimes in data packets per second or data packets per time slot. The system throughput or aggregate throughput is the sum of the data rates that are delivered to all terminals in a network.

$$t = \frac{\sum i \text{Size of Packet}(i) \text{ received}}{\text{simulation time}}$$

### G. Packet Delivery Ratio (PDR)

It is the ratio of the number of delivered packets to the destinations by the total number of packets actually sent.

$$\text{PDR} = \frac{\sum i \text{packet}(i)\text{received}}{\sum i \text{packet}(i)\text{sent}}$$

The greater the value of the packet delivery ratio, the better is the performance of the protocol.

### H. Overhead (v)

The additional costs incurred during the data packet delivery process.

$$v = \frac{\sum i \text{Data packet}(i)\text{received}}{\sum i \text{Routing packet}(i)\text{sent}}$$

## 6. Performance Evaluation

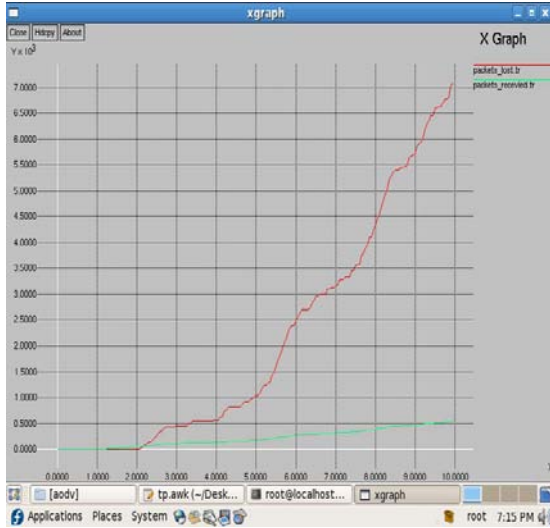


Figure 2: AODV graph comparing packets lost and packets received

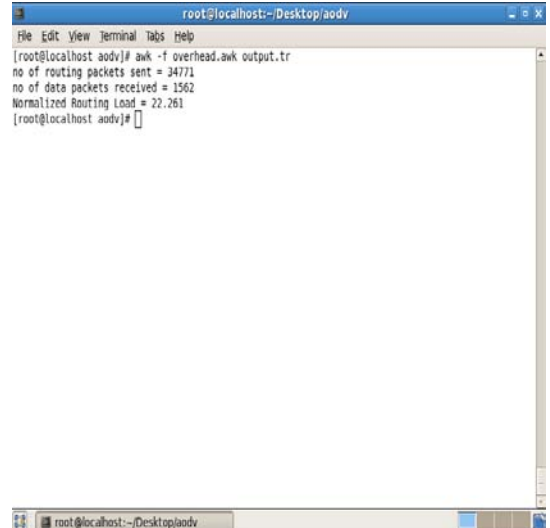


Figure 5: Overhead output of AODV

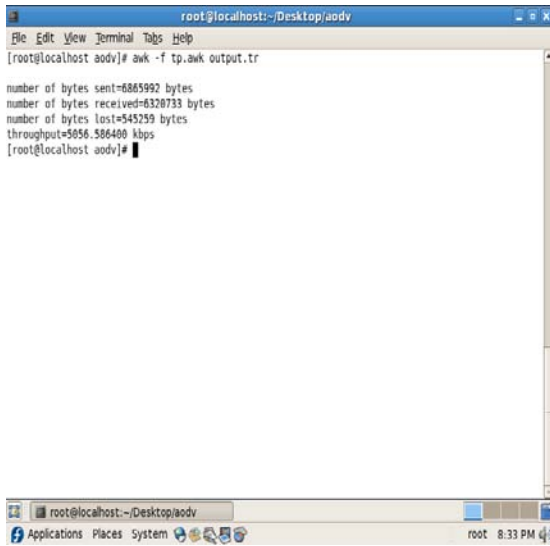


Figure 3: Throughput output of AODV

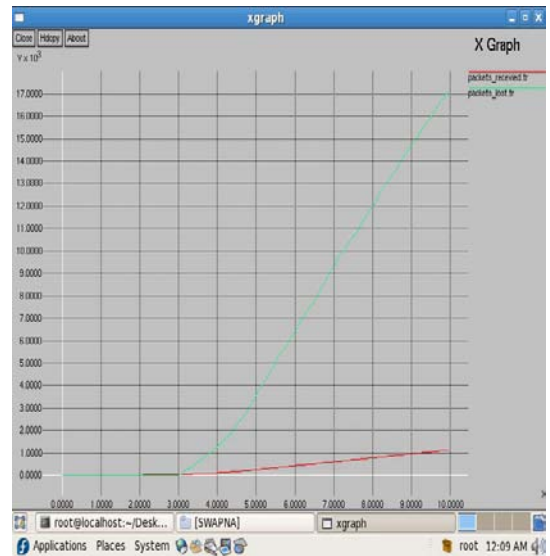


Figure 6: DSDV graph comparing packets lost and packets received

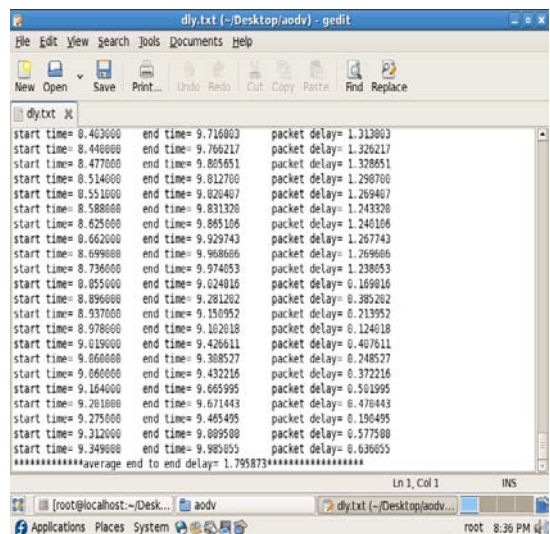


Figure 4: Delay output of AODV

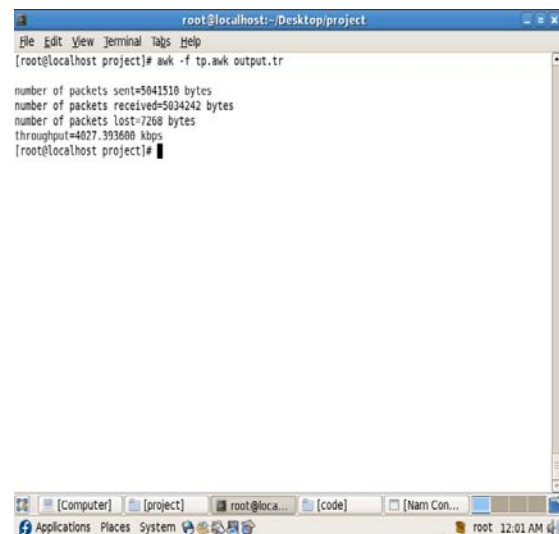


Figure 7: Throughput output of DSDV

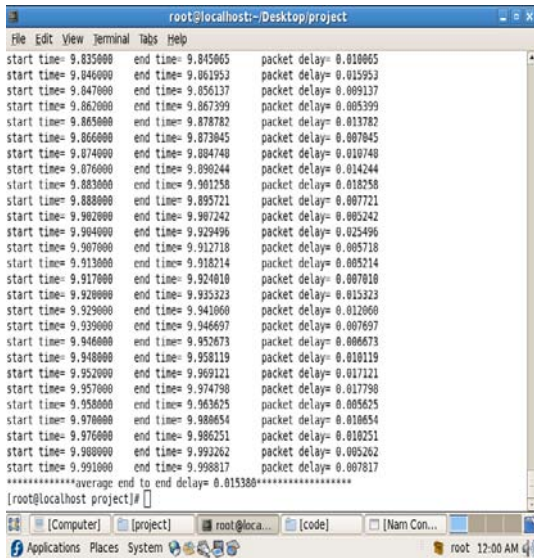


Figure 8: Delay output of DSDV

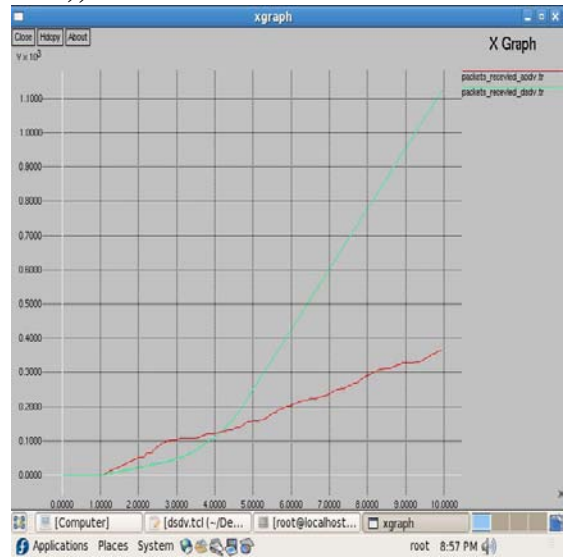


Figure 11: Comparing received packets of AODV and DSDV

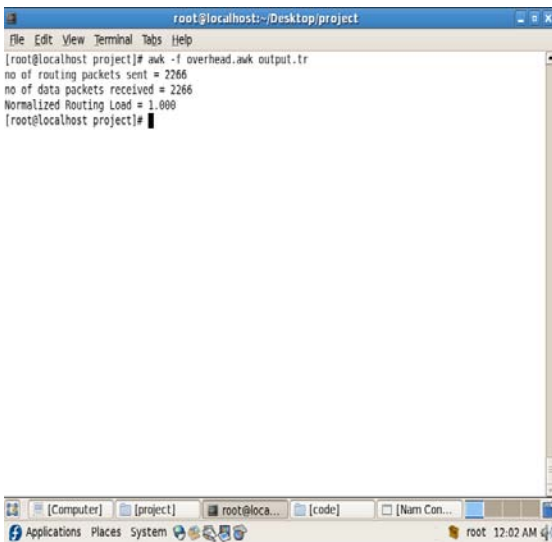


Figure 9: Overhead output of DSDV

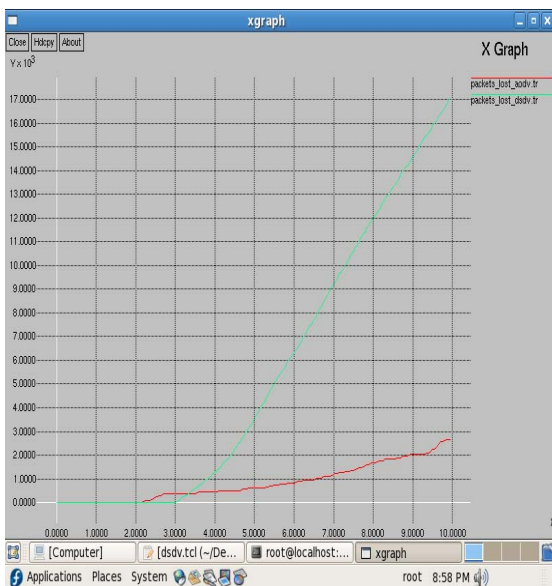


Figure 10: Comparing lost packets of AODV and DSDV

## 7. Observations

From the given xgraphs the performance parameters computed are as recorded in the table that follows:

	DSDV	AODV
throughput	4027.39 kbps	5056.58 kbps
End to end delay	0.0153	1.7958
Packet delivery ratio	0.9985	0.9205
Overhead	1.0	22.26

Table 2: Comparisons between DSDV and AODV.

From these statistics we can note that

- AODV has a significantly better throughput than DSDV.
- End to end delay and packet delivery ratio of DSDV are better than AODV but, the difference is not very significant.
- The overhead of DSDV is also better than AODV.

## 8. Conclusion and Future Work

Therefore, the overall performance of DSDV is better than that of AODV which indicates proactive routing protocols are more preferable than reactive routing protocols. (Yet, according to traffic patterns this may vary). And also overhead of DSDV is less compared to AODV.

As of now we have considered only fixed number of nodes, Also there has been no emphasis on mobility. Even pause time has been neglected. The future scope is to find out what factors are responsible for these simulation results, as performance of AODV in various situations as compared to DSDV are not as expected. Further simulation needs to be carried out for the performance evaluation with not only increased number of nodes but also varying other related parameters like Pause Time, Network load, Speed, Mobility modes etc. Various parameters such as jitter, energy can also be analyzed.

## References

- [1] Md. Monzur Morshed, Md. Habibur Rahman, Md. Rezaur Rahman Mazumder, and K. A. M. Lutfullah, "Simulation and Analysis of Ad-hoc on demand Distance Vector Routing Protocol," ICIS 2009, vol. II, pp. 610- 614, November 2009.
- [2] Valid Nazari Talooki, and Jonathan Rodriguez, "Quality of Service for Flat Routing Protocols in Mobile Ad-hoc Network," ICST, 7-9 September 2009.
- [3] V. Ramesh, Dr. P. Subbaiah, N. Koteswar Rao and M. Janardhana Raju, "Performance comparison and analysis of DSDV and AODV for MANET," International Journal on Computer Science and Engineering, vol. 02, pp. 183-188, 2010.
- [4] Charles E. Perkins, Elizabeth M. Belding-Royer, and Samir R. Das, "Ad hoc On-Demand Distance Vector Routing," IETF MANET Draft, Charles E. Perkins, Ad Hoc Networking, ISBN 0-201-30976-9 February 2003.
- [5] S H Manjula, C N Abhilash, Shaila K, K R Venugopal, and L M Patnaik, "Performance of AODV Routing Protocol using Group and entity Mobility Models in Wireless Sensor Networks," In proceedings of the International Multi Conference of Engineers and Computer Scientists (IMECS 2008), Hong Kong, vol. 2, pp. 1212-1217, 19-21 March 2008.
- [6] V. Kanakaris\*, D. Ndzi and D. Azzi., Ad-hoc Networks Energy Consumption: A review of the Ad-Hoc Routing Protocols, Journal of Engineering Science and Technology Review 3 (1) (July 2010)
- [7] S. Giannoulis, C. Antonopoulos, E. Topalis, S. Koubias, ZRP versus DSR and TORA: A comprehensive survey on ZRP performance, IEEE Transactions on Industrial Informatics Vol. 3, No. 1, pp. 63-72 (Feb. 2007).
- [8] D. Maltz, Y. Hu, The Dynamic Source Routing Protocol for Mobile Adhoc Networks, Internet Draft, Available: <http://www.ietf.org/internetdrafts/draftietf-manet-dsr-10.txt>, July 2004.
- [9] C. Perkins and E. Royer, Ad Hoc On-demand Distance Vector (AODV) Routing, Internet Draft, MANET working group, draft-ietf-manetaodv- 05.txt, March 2000.
- [10] A. H. Abd Rahman, Z. A. Zukarnain, Performance Comparison of AODV, DSDV and I-DSDV Routing Protocols in Mobile Ad Hoc Networks, European Journal of Scientific Research Vol. 31, No. 4, pp. 556-576 (June 2009).
- [11] L. Junhai, X. Liu, Y. Danxia, Research on multicast routing protocols for mobile ad-hoc networks, Science Direct Vol. 52 Issue 5, pp. 988-997 (April 2008).
- [12] Marc Greis' Tutorial for the UCB/LBNL/VINT Network Simulator "ns".
- [13] L. Layuan, Y. Peiyan and L. Chunlin, "Performance Evaluation and Simulations of Routing Protocols in Ad Hoc Networks" Computer Communications, vol. 30, pp. 1890-1998, 2007.
- [14] C. Perkins and E. Royer, "Ad Hoc on Demand Distance Vector Routing," Proceedings of the 2nd IEEE workshop on Mobile Computing Systems and Applications (WMCSA 1999) pp.99-100, Feb-1999.
- [15] "The Network Simulator- ns-2", available at <http://www.isi.edu/nsnam/ns/referre> On March 2010.
- [16] Chenna Reddy, P.; ChandraSekhar Reddy, P. "Performance Analysis of Adhoc " Network Routing Protocols ISAUHC '06, International Symposium on Ad Hoc and Ubiquitous Computing, vol., no., pp.186-187, 20-23 Dec. 2006.
- [17] Huang R., Zhuang Y., Cao Q., "Simulation and Analysis of Protocols in Ad Hoc Network", International Conference on Electronic Computer Technology © 2009 IEEE.
- [18] Fall K., Varadhan K., —The ns manual, The VINT Project, 2009
- [19] R. S. Sisodia, B. S. Manoj and C. Siva Ram Murthy, "A Preferred Link- Based Routing Protocol for Ad Hoc Wireless Networks," Journal of Communications and Networks, vol. 4, no. 1, march 2002, pp. 14-21.
- [20] Elizabeth M. Royer and C-K Toh. "A Review of current Routing Protocols for Ad-hoc Mobile Wireless Networks", IEEE Personal Communications, Vol. 6, No.2, pp. 46-55, April 1999