

# Hybrid Objective Metric for Image Quality Assessment

D. V. N. Koteswara Rao<sup>1</sup>, Gutti Prasad<sup>2</sup>, Rahul Lakkakula<sup>3</sup>

<sup>1</sup>Assistant Professor, Department of Electronics and Communication Engineering, SACET, Chirala, India

<sup>2,3</sup>Students of Department of Electronics and Communication Engineering, SACET, Chirala, India

**Abstract:** Image Quality Assessment (IQA) goal is to use computational models to measure the image quality consistently with subjective evaluations. In this paper, a peculiar feature-similarity (FSIM) index for full reference IQA is proposed based on the fact that human visual system (HVS) perceives an image mainly according to its low-level features. Specifically, the phase congruency (PC), which is a dimension less measure of significance of a local structure, is used as the primary feature. Considering that PC is unaffected by contrast, while the contrast information does affect the HVS' perception of image quality, the image gradient magnitude is employed as the secondary feature in FSIM. After obtaining the local quality map, we use PC again as a weighting function to derive single quality score. Extensive experiments performed on TID2008, a widely used benchmark IQA database demonstrated that FSIM can achieve much higher consistency with the subjective evaluations than state-of-the-art IQA metrics.

**Keywords:** Image quality assessment, phase congruency, gradient, low-level feature.

## 1. Introduction

With the advancements in digital imaging and communication technologies, image quality assessment has been becoming an important issue in numerous applications, such as image acquisition, transmission, compression, restoration, and enhancement. Any processing applied to an image may cause an important loss of information or quality. Image quality evaluation methods can be divided into objective and subjective methods. Subjective methods are based on HVS' judgement (i.e. Mean opinion score (MOS)). In practice, however subjective evaluation is usually very inconvenient, time taking and expensive. They also cannot be integrate into automatic systems that adjust themselves in real-time based on the feedback of output quality. Objective methods are based on comparisons using explicit numerical criteria. According to the possibility of the reference image, objective IQA metrics can be classified as full reference (FR), no-reference (NR) and reduced-reference (RR) methods. In this paper the discussion is confined to FR methods, where the original "distortion-free" image is known as the reference image.

### 1.1 Existing Objective Metrics

The simplest and most widely used full-reference quality metric is the mean squared error (MSE), computed by averaging the squared intensity differences of distorted and reference image pixels, along with the related quantity of peak signal-to-noise ratio (PSNR). These are appealing because they are simple to calculate, have clear physical meanings, and are mathematically convenient in the last three decades, a great deal of effort has gone into the development of quality assessment methods that take advantage of known characteristics of the human visual system (HVS). Peak signal-to-noise ratio (PSNR) and mean squared error (MSE) operate directly on the intensity of the image, and they do not correlate well with subjective fidelity ratings. SSIM [6] is the image quality assessment of an image based on the degradation of structural information. The multi scale extension of SSIM, called MS-SSIM [7], produce better results than its single-

scale counterpart. Multi-scale method is a convenient way to incorporate image details at different resolutions. However, the main drawback of these two methods is that when calculating a single quality score from the local quality map they have considered all positions to have the same importance. In visual information fidelity (VIF), images are divided into different sub-bands and these sub-bands can have different weights at pooling stage. However within each sub-band, each position is still given same importance. The choice of a proper distortion model is crucial for image fidelity assessments that are expected to reflect perceptual quality. In essence we want the distortion model to characterize what the HVS perceives as distortions. In this paper, although FSIM is designed for gray scale images (or the luminance components of colour images), the chrominance information can be easily incorporated by means of a simple extension of FSIM, and we call this extension FSIM<sub>c</sub>, which has been implemented in this paper.

**Phase Congruency (PC):** Under the definition of PC, there can be different implementations to compute the PC map of a given image. In this paper we adopt the method developed by Kovessi [2], which is widely used in literature. We start from the 1D signal  $g(x)$ . Denote by  $M_n^e$  and  $M_n^o$  the even-symmetric and odd-symmetric filters on scale  $n$  and they form a quadrature pair. Responses of each quadrature pair to the signal will form a response vector at position  $x$  on scale  $n$  is  $[e_{n(x)}, o_{n(x)}] = [g(x) * M_n^e, g(x) * M_n^o]$ , and the local amplitude on scale  $n$  is  $A_n(x) = \sqrt{e_{n(x)}^2 + o_{n(x)}^2}$ . let  $F(x) = \sum_n e_{n(x)}$  and  $H(x) = \sum_n o_{n(x)}$ . The 1D PC can be computed as

$$PC(x) = E(x) / (\epsilon + \sum_n A_n(x))$$
 Where,  $E(x) = \sqrt{F^2(x) + H^2(x)}$  and  $\epsilon$  is the positive constant. The quadrature pair of filters, i.e.  $M_n^e$  and  $M_n^o$ , can be obtained by using log-Gabor filters. The transfer function of log-Gabor filter in frequency domain is,  $G(\omega) = \exp(-(\log(\omega/\omega_0))^2 / 2\sigma_r^2)$

Where,  $\omega_0$  is the filter's center frequency and  $\sigma_r$  controls the filter's bandwidth.

The 1D log-Gabor filters described above can be extended to 2D ones by simply applying spreading function across the filter perpendicular to its orientation. By using Gaussian as the spreading function, the 2D log-Gabor function has the following transfer function,

$$G_2(x) = \exp\left[-\frac{(\log(\omega/\omega_0))^2}{2\sigma_r^2}\right] \cdot \exp\left[-\frac{(\log(\theta-\theta_j))^2}{2\sigma_\theta^2}\right]$$

Where  $\theta_j = \frac{j\pi}{J}, j = \{0,1,2, \dots, j-1\}$  is the orientation angle of the filter, J is the number of orientations and  $\sigma_\theta$  determines the filter's angular bandwidth.

By modulating  $\omega_0$  and  $\theta_j$  and convolving  $G_2$  with the 2D image, we get a set of responses at each point x. as  $[e_{n,\theta_j}(x), o_{n,\theta_j}(x)]$ . The local amplitude on scale n and orientation  $\theta_j$  is  $A_{n,\theta_j}(X) = \sqrt{e_{n,\theta_j}(x)^2 + o_{n,\theta_j}(x)^2}$  and the local energy along orientation  $\theta_j$  is

$$E_{n,\theta_j}(x) = \sqrt{F_{\theta_j}(x)^2 + H_{\theta_j}(x)^2}$$

Where  $F_{\theta_j}(x) = \sum_n e_{n,\theta_j}(x)$  and  $H_{\theta_j}(x) = \sum_n o_{n,\theta_j}(x)$ .

The 2D PC at x is defined as shown in below equation  $PC_{2D}(x)$ ,

$$PC_{2D}(x) = \frac{\sum_j E_{\theta_j}(x)}{\epsilon + \sum_n \sum_j A_{n,\theta_j}(x)}$$

It should be noted that  $PC_{2D}(x)$  is a real number with in  $0 \sim 1$ .

**Gradient Magnitude**

Image gradient computation is a conventional topic in image processing. Gradient operators can be expressed by convolution masks. Three commonly used gradient operators are the Sobel operator, the Prewitt operator and the Scharr operator. Prewitt, Sobel and Scharr 3x3 gradient operators are very familiar for edge detection. Among these three Scharr is found to give promising results compared to other two. The partial derivatives  $G_x(x)$  and  $G_y(x)$  of the image  $f(x)$  over horizontal and vertical directions using the three gradient operators are listed in Table 4.1.1 The gradient magnitude (GM) of  $f(x)$

is then defined as  $G = \sqrt{G_x^2 + G_y^2}$ .

	Sobel	Prewitt	Scharr
$G_x(X)$	$\frac{1}{4} \begin{bmatrix} 1 & 0 & -1 \\ 2 & 0 & -2 \\ 1 & 0 & -1 \end{bmatrix} * f(x)$	$\frac{1}{3} \begin{bmatrix} 1 & 0 & -1 \\ 1 & 0 & -1 \\ 1 & 0 & -1 \end{bmatrix} * f(x)$	$\frac{1}{16} \begin{bmatrix} 3 & 0 & -3 \\ 10 & 0 & -10 \\ 3 & 0 & -3 \end{bmatrix} * f(x)$
$G_y(X)$	$\frac{1}{4} \begin{bmatrix} 1 & 2 & 1 \\ 0 & 0 & 0 \\ -1 & -2 & -1 \end{bmatrix} * f(x)$	$\frac{1}{3} \begin{bmatrix} 1 & 1 & 1 \\ 0 & 0 & 0 \\ -1 & -1 & -1 \end{bmatrix} * f(x)$	$\frac{1}{16} \begin{bmatrix} 3 & 10 & 3 \\ 0 & 0 & 0 \\ -3 & -10 & -3 \end{bmatrix} * f(x)$

**Table1:** Partial derivative of f(x) using different Gradient operators

**2. Calculation of FSIM**

With the extracted PC and GM feature maps, we present a novel Feature similarity (FSIM) index for IQA. Suppose that we are going to calculate the similarity between images  $f_1(x)$  and  $f_2(x)$ . Denote  $PC_1$  and  $PC_2$  the PC maps,  $G_1$  and  $G_2$  the GM maps extracted from them. It should be noted that for colour image, PC and GM are extracted from their luminance channels.

The similarity measure for  $PC_1(x)$  and  $PC_2(x)$  is defined as

$$S_{PC}(x) = \frac{2PC_1(x).PC_2(x)+T_1}{PC_1^2(x)+PC_2^2(x)+T_1}$$

Where  $T_1$  is a positive constant to improve the stability of  $S_{PC}(x)$ . In practice, determination of  $T_1$  depends on Dynamic range of PC values. The GM values  $G_1(x)$  and  $G_2(x)$  are compared and similarity measure is defined as

$$S_G(x) = \frac{2G_1(x).G_2(x)+T_2}{G_1^2(x)+G_2^2(x)+T_2}$$

Where  $T_2$  is a positive constant depends on the dynamic range of GM values. Thus the overall similarity between  $f_1$  and  $f_2$  can be calculated using  $S_{PC}(x)$  and  $S_G(x)$ . However, different locations will have different contributions to HVS' perception of the image. Since human visual cortex is sensitive to phase congruent structures, the PC value at

a location can reflect perceptible significance of that location. Therefore we use  $PC_m(x) = \max(PC_1(x), PC_2(x))$  to calculate the overall similarity. Accordingly the FSIM index between  $f_1$  and  $f_2$  is defined as

$$FSIM = \frac{\sum_{x \in \Omega} [S_{PC}(x)]^\alpha \cdot [S_G(x)]^\beta \cdot PC_m(x)}{\sum_{x \in \Omega} PC_m(x)}$$

Where  $\Omega$  means the whole image spatial domain,  $\alpha$  and  $\beta$  are the parameters used to adjust the relative importance of PC and GM features.

The FSIM index is designed for gray scale images or the luminance components of colour images. Since the chrominance information will also impact HVS in understanding the images, it can be incorporated by applying a straight forward extension to the FSIM framework. At first, the original RGB colour images are converted into another colour space, where the luminance can be separated from the chrominance. To this end, we adopt the widely used YIQ colour space. The transformation from RGB space to YIQ space can be accomplished via:


$$\begin{bmatrix} Y \\ I \\ Q \end{bmatrix} = \begin{bmatrix} 0.299 & 0.587 & 0.114 \\ 0.596 & -0.274 & -0.322 \\ 0.211 & -0.523 & 0.312 \end{bmatrix} \begin{bmatrix} R \\ G \\ B \end{bmatrix}$$

Let  $I_1$  ( $I_2$ ) and  $Q_1$  ( $Q_2$ ) be the  $I$  and  $Q$  chromatic channels of the image  $f_1$  ( $f_2$ ), respectively. Similar to the definitions of  $S_{PC}(x)$  and  $S_G(x)$ , we define the similarity between chromatic features as

$$S_I(x) = \frac{2I_1(x) \cdot I_2(x) + T_3}{I_1^2(x) + I_2^2(x) + T_3}$$

$$S_Q(x) = \frac{2Q_1(x) \cdot Q_2(x) + T_4}{Q_1^2(x) + Q_2^2(x) + T_4}$$

Where  $T_3$  and  $T_4$  are positive constants.

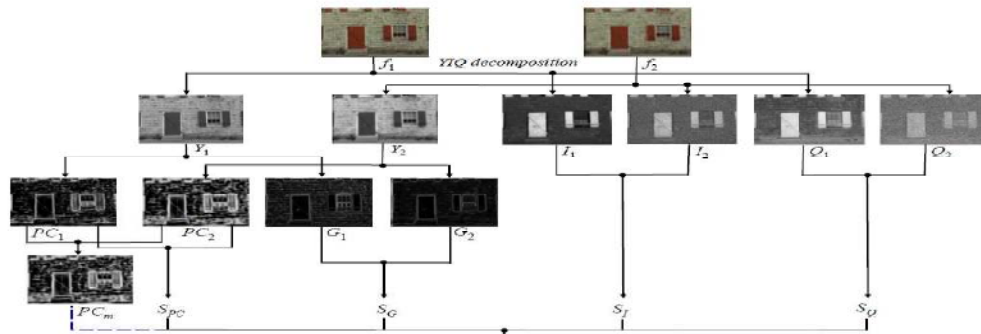


$$FSIM_C = \frac{\sum_{x \in \Omega} S_{PC}(X) \cdot S_G(X) \cdot [S_I(X) \cdot S_Q(X)]^\lambda \cdot PC_m(X)}{\sum_{x \in \Omega} PC_m(X)}$$

**Figure 1:** Illustration for the FSIM/FSIM<sub>C</sub> index computation.  $f_1$  is the reference image and  $f_2$  is a distorted version of  $f_1$ .

Where  $\lambda > 0$  is the parameter used to adjust the importance of the chromatic components. The procedures to calculate the FSIM/FSIM<sub>C</sub> indices are illustrated in

Fig.1. If the chromatic information is ignored in Fig, the FSIM<sub>C</sub> index is reduced to the FSIM index.

**Experimental Results**

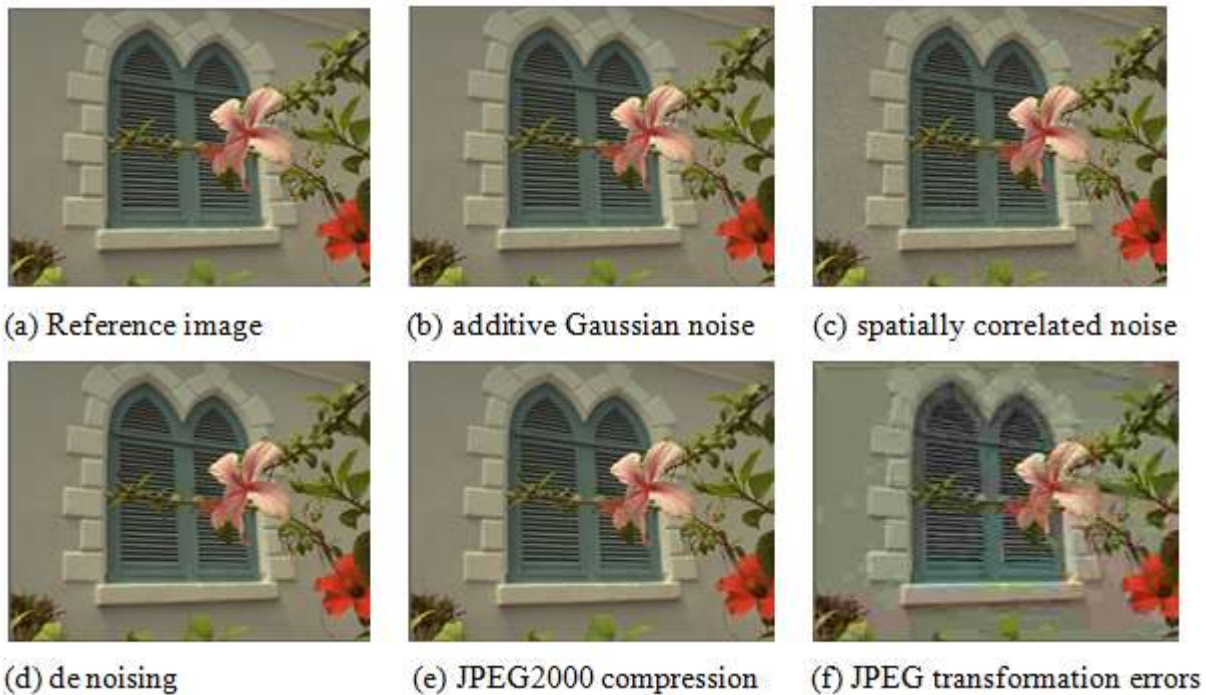

**Figure 2:** Reference image and distorted versions of reference image in TID2008

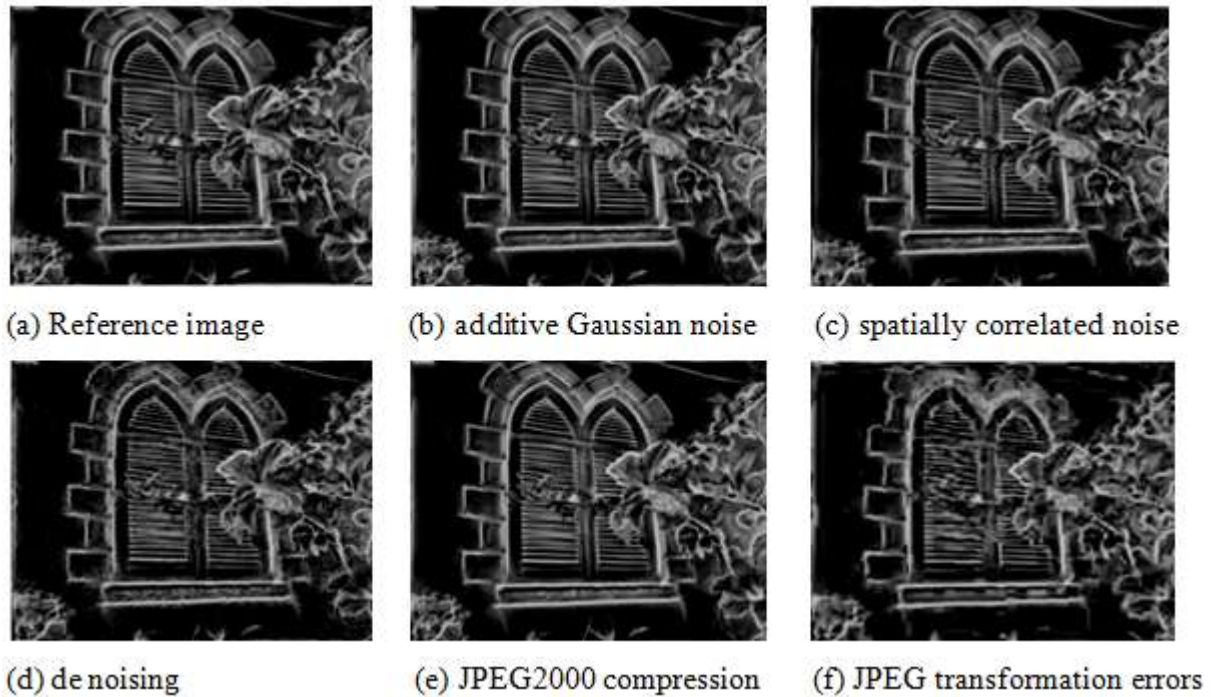


Figure 3: PC maps extracted from images 4a ~ 4f, respectively

	Fig. 1b	Fig. 1c	Fig. 1d	Fig. 1e	Fig. 1f
Subjective score	4	2.8235	3.9688	4.8335	2.3235
FSIM	0.9257	0.8218	0.9404	0.9700	0.7646
FSIM <sub>C</sub>	0.9164	0.8016	0.9377	0.9689	0.7644

Table 2: Quality Evaluation of Images in Fig.2

**Example to demonstrate effectiveness of FSIM/FSIM<sub>C</sub>**

We use an example to demonstrate the effectiveness of FSIM/FSIM<sub>C</sub> in evaluating perceptible image quality. Fig2a is the I7 reference image in TID2008 database [1],

and Figs. 2b ~ 2f show five distorted images of I7. We computed the image quality of Figs. 2b ~ 2f using FSIM and compared with other IQA metrics and their subjective scores are listed in Table 1.

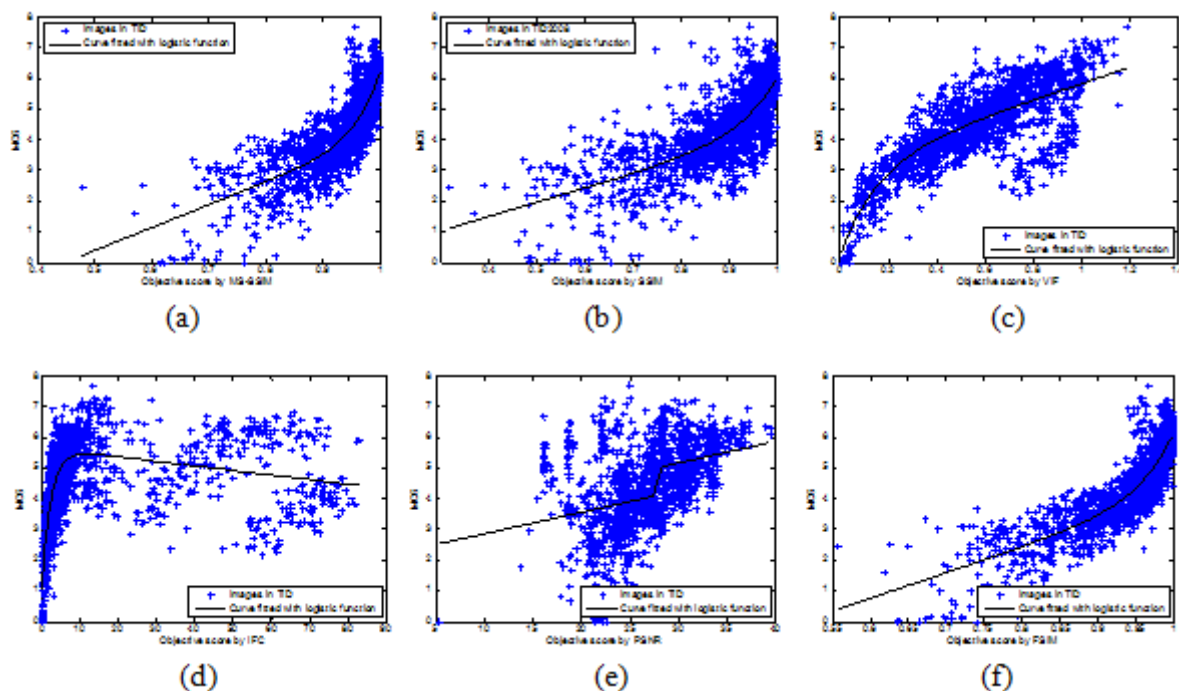


Figure 4: Scatter plots of subjective MOS versus scores obtained by model prediction on the TID2008 database

Fig.4 shows the scatter distribution of subjective MOS versus the predicted scores by FSIM and other 5 IQA

indices on the TID2008 database. The curves shown in the Fig.4 were obtained by nonlinear fitting. From Fig. 4, one

can see that the objective scores predicted by FSIM correlate much more consistently with subjective evaluations than the other methods.

### 3. Conclusion

In this paper, we proposed a novel low-level feature based image quality assessment (IQA) metric, namely Feature SIMilarity (FSIM) index. The theme of FSIM is that HVS perceives an image mainly based its salient low-level features. Specifically, two features, the phase congruency (PC) and the gradient magnitude (GM), are used in FSIM, and they represent complementary aspects of image visual quality. The PC values also used to weight the contribution of each point to the overall similarity of two images. We then extended FSIM to FSIM<sub>C</sub> by incorporating the image chromatic features into consideration. The FSIM and FSIM<sub>C</sub> indices were compared with five prominent IQA metrics on TID2008 database, and very promising results were obtained. Particularly, they perform consistently well across all the noises in TID2008 database, validating that they are very robust IQA metrics.

### References

- [1] N. Ponomarenko, V. Lukin, A. Zelensky, K. Egiazarian, M. Carli, and F. Battisti, "TID2008 - A database for evaluation of full-reference visual quality assessment metrics", *Advances of Modern Radioelectronics*, vol. 10, pp. 30-45, 2009.
- [2] P. Kovsesi, "Image features from phase congruency", *Videre: J. Comp. Vis. Res.*, vol. 1, no. 3, pp. 1-26, 1999.
- [3] *Digital Image Processing Using Matlab* By Rafael C. González, Richard Richard Eugene Woods, Steven L. Eddins
- [4] Kovsesi, P.D.: phase congruency: A low-level image invariant. *Psychological Research* 64(2000) 136-148.
- [5] An Information Fidelity Criterion for Image Quality Assessment Using Natural Alan Conrad Bovik, and Gustavo de Veciana, *IEEE Transactions on image processing*, Vol. 14, No. 12, December 2005.
- [6] Image Quality Assessment: From Error Visibility to Structural Similarity Scene Statistics Hamid Rahim Sheikh, Zhou Wang, Alan C. Bovik, Hamid R. Sheikh, and Eero P.S. Simoncelli, *IEEE Transactions on image processing*, Vol. 13, No.4, April 2004.
- [7] Multi Scale-Structural SIMilarity for image quality assessment Zhou Wang<sup>1</sup>, Eero P. Simoncelli<sup>1</sup> and Alan C. Bovik<sup>2</sup> *proceedings of 37th IEEE Asilomar conference on signals, systems and computers*, pacific Grove, CA, Nov .9-12, 2003.