

Preparation of (PVA-PEG-PVP-MgO, CoO) Nanocomposites and Study their Optical Properties

Ibrahim R. Agool¹, Ahmed Hashim²

¹Al- Mustansiriah University, College of Science, Department of Physics, Iraq

²Babylon University, College of Education of Pure Science, Department of Physics, Iraq

Abstract: Nanocomposites have many applications such: optical integrated circuits, sensors, coatings, medical devices.. etc. So, this paper aims to preparation of new type (PVA-PEG-PVP- MgO, CoO) nanocomposites to production new nanocomposites use in many applications. The nanocomposites were prepared by using casting technique. The polymers was mixed with different weight percentages are (PVA_{0.90}-PEG_{0.05}-PVP_{0.05}). The nanomaterials (MgO and CoO) were added to polymers composites with concentrations are (0, 2, 4 and 6) wt.%. The results show that the absorbance (A) of nanocomposites is increased with increase of concentrations of magnesium oxide and cobalt oxide nanoparticles. The optical constants (absorption coefficient (α), extinction coefficient (k), refractive index (n), real and imaginary dielectric constants (ϵ_1 and ϵ_2)) of nanocomposites are increasing with the increase of the weight percentages of magnesium oxide and cobalt oxide nanoparticles. The energy gap (E_g) of (PVA-PEG-PVP) decreases with the increase of the weight percentages of magnesium oxide and cobalt oxide nanoparticles.

Keywords: nanocomposites, optical properties, magnesium oxide, cobalt oxide

1. Introduction

When you submit your paper print it in two-column format, A nanoparticle is the most fundamental component in the fabrication of a nanostructure; metallic nanoparticles have different physical and chemical properties from bulk metals (lower melting points, higher specific surface area, specific optical properties, mechanical strength, and specific magnetization) properties that might prove to be attractive in various industrial applications. The optical property is one of the fundamental attraction and characteristic of nanoparticle [1]. The applications of nanocomposites are quite promising in the fields of microelectronic packaging, optical integrated circuits, automobiles, drug delivery, sensors, injection molded products, membranes, packaging materials, aerospace, coatings, adhesives, fire-retardants, medical devices, consumer goods, etc[2]. The development of polymer based nanocomposites with antimicrobial activity offers interesting possibilities because the polymer matrix can be varied in order to fulfill not only specific technological requirements but also nanostructures with size- and shape dependent properties that can be exploited [3]. Metal oxides such as TiO₂, ZnO, MgO and CaO are of particular interest as they are not only stable under harsh process conditions but also generally regarded as safe materials to human beings and animals. Some of the metal oxides e.g. MgO and CaO are essential minerals for human. Other metal oxides such as TiO₂ and ZnO have been used extensively in the formulation of personal care products. Synthetic fibers can be treated with these metal oxides during production in order to make them anti-microbial [4].

2. Materials and Methods

The materials are used in this paper are polymers (polyvinyl alcohol (90 wt.%), Polyethylene glycol (5 wt.%) and polyvinyl pyrrolidinone (5 wt.%) as a matrix and the nanomaterials (magnesium oxide and cobalt oxide) as

additive. The polymers (polyvinyl alcohol (90 wt.%), Polyethylene glycol (5 wt.%) and polyvinyl pyrrolidinone (5 wt.%) are dissolved in distill water by using magnetic stirrer in mixing process to get homogeneous solution. The magnesium oxide and cobalt oxide nanoparticles were added to solution with concentrations are (0,2,4 and 6) wt.%. The casting technique was used to preparation the (PVA-PEG-PVP-MgO, CoO) nanocomposites. The optical properties of (PVA-PEG-PVP-MgO, CoO) are measured by using UV/1800/ Shimadzu spectrophotometer in range of wavelength (200-800) nm.

Absorption coefficient (α) is defined by following equation[5]:

$$\alpha = 2.303A/t \quad \dots\dots\dots (1)$$

Where A: is the absorbance and t: is the sample thickness.

The indirect transition model for amorphous semiconductors is[6]:

$$\alpha h\nu = B(h\nu - E_g)^r \quad \dots\dots\dots (2)$$

Where B is a constant, $h\nu$ is the photon energy, E_g is the optical energy band gap, $r = 2$ for allowed indirect transition and $r = 3$ for forbidden indirect transition.

The Refractive index (n) is given by following equation[7]:

$$n = (1+R^{1/2}) / (1-R^{1/2}) \quad \dots\dots\dots (3)$$

Where R is the reflectance.

The extinction coefficient (k) is calculated by using the following equation[7]:

$$K = \alpha\lambda/4\pi \quad \dots\dots\dots (4)$$

The dielectric constant is divided into two parts real (ϵ_1), and imaginary (ϵ_2). The real and imaginary parts of dielectric constant (ϵ_1 and ϵ_2) are calculated by using equations[8]:

$$\epsilon_1 = n^2 - k^2 \text{ (real part)} \quad \dots\dots\dots (5)$$

$$\epsilon_2 = 2nk \text{ (imaginary part)} \quad \dots\dots\dots (6)$$

3. Results and Discussion

The variation of absorbance spectra of (PVA-PEG-PVP-MgO, CoO) nano composites with wavelength (200-800) nm of different concentrations of magnesium oxide and cobalt oxide nanoparticles are shown in figures (1 and 2) respectively. From the figures the absorbance of (PVA-PEG-PVP) polymers composites is increased with increase the concentrations of magnesium oxide and cobalt oxide nanoparticles which attributed to nanoparticles which absorb the incident light [9].

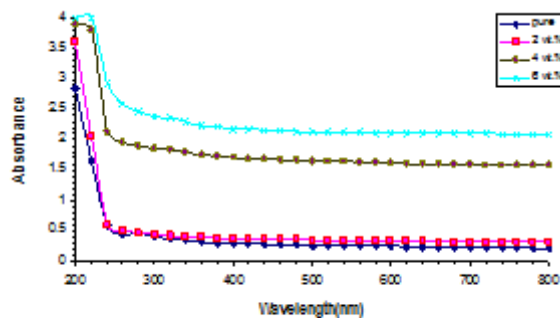


Figure 1
The variation of optical absorbance for (PVA-PEG-PVP-MgO) nanocomposite with wavelength

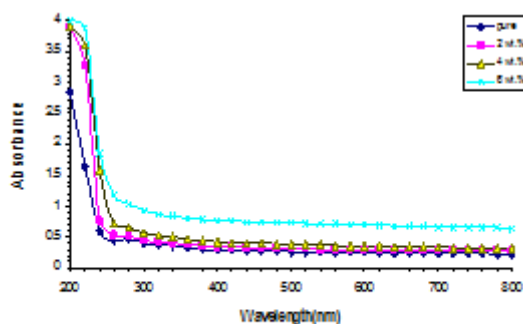


Figure 2
The variation of optical absorbance for (PVA-PEG-PVP-CoO) nanocomposite with wavelength

The effect of magnesium oxide and cobalt oxide nanoparticles concentrations on the absorption coefficient of nanocomposites are shown in figures (3 and 4) respectively. These figures show that the absorption coefficient of (PVA-PEG-PVP) polymers composites increases with increase of the magnesium oxide and cobalt oxide nanoparticles concentrations, this increase attributed to increase the number of carries charges which causes to increase the absorbance. The absorption coefficient have values are less than 10^4 cm^{-1} which mean the nanocomposites have indirect energy band gap as shown in figures (5 and 6) for allowed indirect transition of (PVA-PEG-PVP- MgO) and (PVA-PEG-PVP-CoO) nanocompsites respectively and figures (7 and 8) for forbidden indirect transition of (PVA-PEG-PVP-MgO) and

(PVA-PEG-PVP-CoO) nanocompsites respectively. The energy band gap for allowed and forbidden indirect transition decreases with increase of the magnesium oxide and cobalt oxide nanoparticles concentrations which attributed to the increase the localized level in forbidden energy band gap[10].

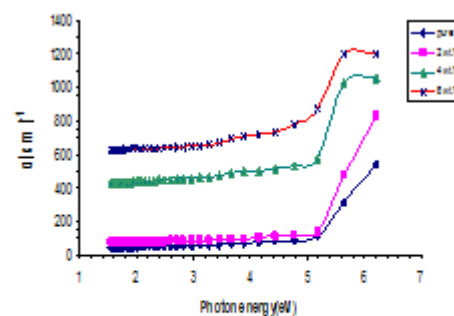


Figure 3
The absorption coefficient for (PVA-PEG-PVP-MgO) nanocomposite with various photon energy

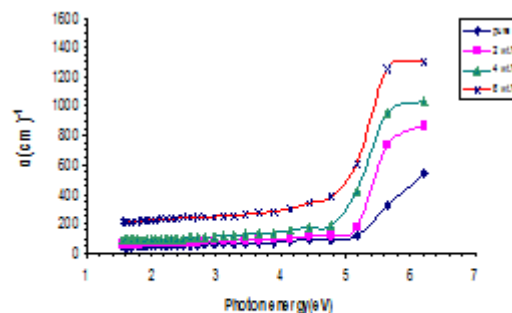


Figure 4
The absorption coefficient for (PVA-PEG-PVP-CoO) nanocomposite with various photon energy

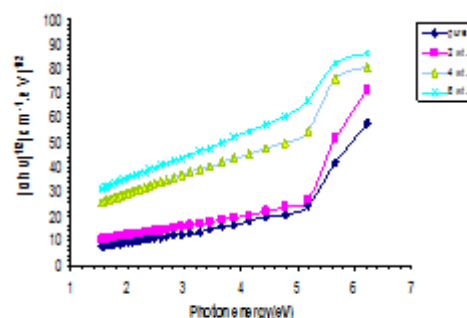


Figure 5
The relationship between $(\alpha h \nu)^{1/2} (\text{cm}^{-1} \cdot \text{eV})^{1/2}$ and photon energy of nanocomposites.

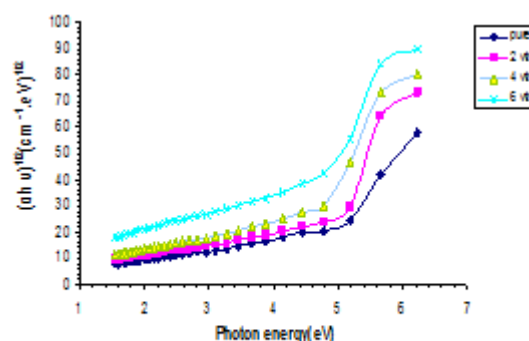


Figure 6
The relationship between $(\alpha h \nu)^{1/2} (\text{cm}^{-1} \cdot \text{eV})^{1/2}$ and photon energy of nanocomposites.

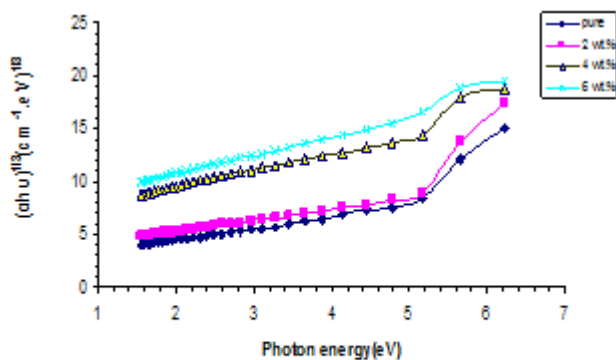


Figure. 7

the relationship between $(\alpha h\nu)^{1/3}(\text{cm}^{-1}.\text{eV})^{1/3}$ and photon energy of nanocomposites.

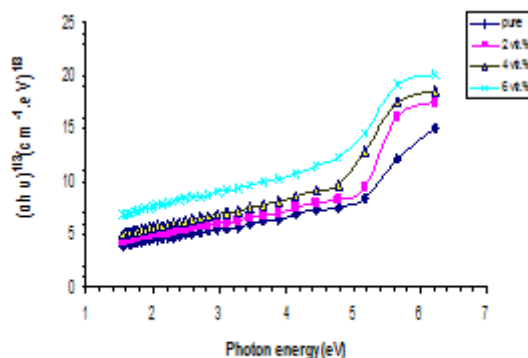


Figure. 8

the relationship between $(\alpha h\nu)^{1/3}(\text{cm}^{-1}.\text{eV})^{1/3}$ and photon energy of nanocomposites.

The variation of refractive index of the (PVA-PEG-PVP-MgO) and (PVA-PEG-PVP-CoO) nanocomposites with photon energy for different concentrations of magnesium oxide and cobalt oxide nanoparticles are shown in figures (9 and 10) respectively. The figures show that the refractive

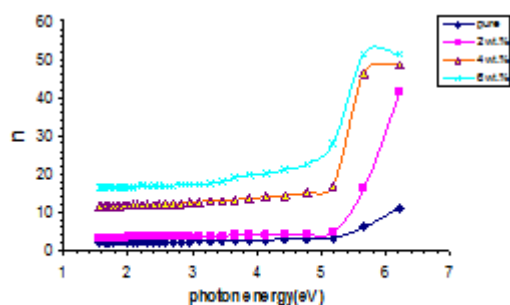


Figure. 9

The relationship between refractive index for (PVA-PEG-PVP-MgO) nanocomposite with photon energy

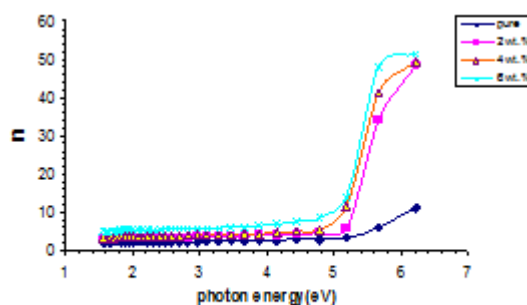


Figure. 10

The relationship between refractive index for (PVA-PEG-PVP-CoO) nanocomposite with photon energy

index of (PVA-PEG-PVP) polymers composites increases with increase of the magnesium oxide and cobalt oxide nanoparticles which attributed to increase the scattering of incident photon which causes to increase the reflectance[11]. Figures (11 and 12) show that the variation of the extinction coefficient of the (PVA-PEG-PVP- MgO) and (PVA-PEG-PVP-CoO) nanocomposites with photon energy for different weight percentages of the magnesium oxide and cobalt oxide nanoparticles respectively. From the figures, the extinction coefficient is increased with increase of the concentrations of magnesium oxide and cobalt oxide nanoparticles, this behavior attributed to increase of absorption of the incident light[12].

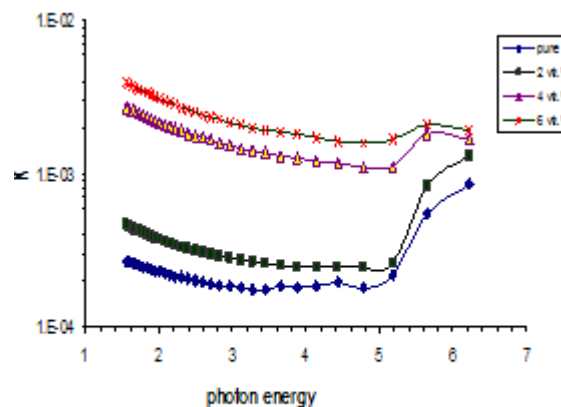


Figure. 11

The extinction coefficient for nanocomposite with various photon energy

The variation of real and imaginary parts of dielectric constants of the (PVA-PEG-PVP- MgO) and (PVA-PEG-PVP-CoO) nanocomposites with photon energy for different concentrations of magnesium oxide and cobalt oxide nanoparticles are shown in figures (13, 14, 15 and 16). The figures show that the real and imaginary parts of dielectric constants are increased with increase of the magnesium oxide and cobalt oxide nanoparticles concentrations which attributed to increase the absorption and scattering of incident light with increase of the concentrations of magnesium oxide and cobalt oxide nanoparticles[13]

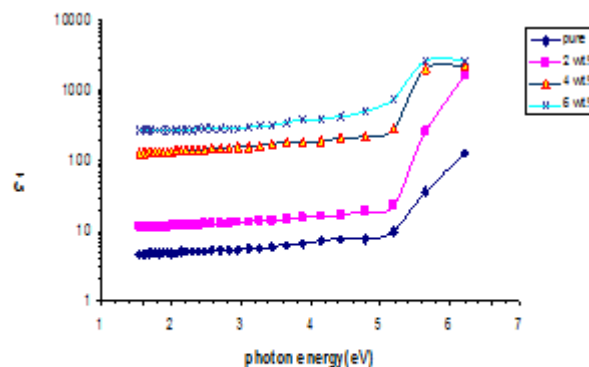


Figure.13

The variation of real part of dielectric constant of nanocomposite with photon energy

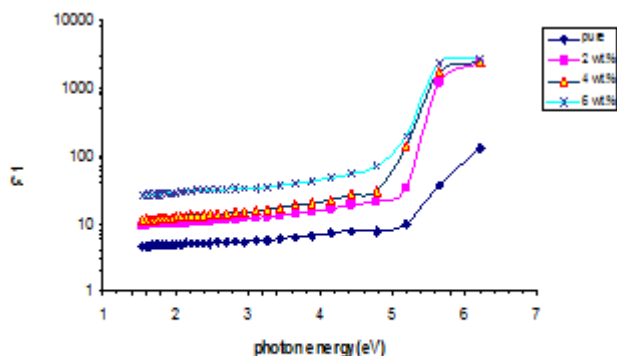


Figure 14

The variation of real part of dielectric constant of nanocomposite with photon energy

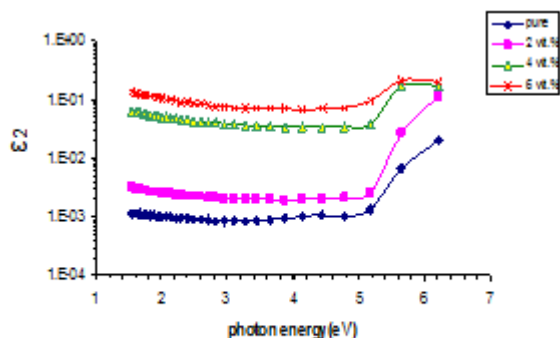


Figure 15

The variation of imaginary part of dielectric constant of nanocomposite with photon energy

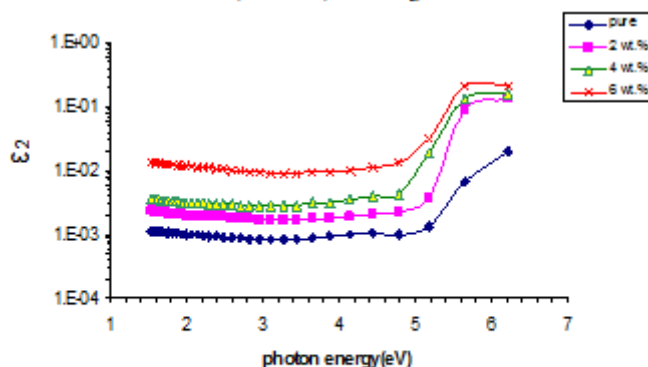


Figure 16

The variation of imaginary part of dielectric constant of nanocomposite with photon energy

4. Conclusions

- 1) The absorbance of (PVA-PEG-PVP) nanocomposites increases with increase of the magnesium oxide and cobalt oxide nanoparticles concentrations.
- 2) The energy band gap of (PVA-PEG-PVP) nanocomposites decreases with increase of the magnesium oxide and cobalt oxide nanoparticles concentrations.
- 3) The absorption coefficient (α), extinction coefficient (k), refractive index (n) and real and imaginary dielectric constants are increasing with increase of the weight percentages of the magnesium oxide and cobalt oxide nanoparticles concentrations.

References

- [1] M. Khairy, M.E. Gouda, 2014, Electrical and optical properties of nickel ferrite/polyaniline nanocomposite, Journal of Advance Research, <http://dx.doi.org/10.1016/j.jare.2014.01.009>
- [2] Wasan Al-Taa'y, Mohammed Abdul Nabi, Rahimi M. Yusop, Emad Yousif, Bashar Mudhaffar Abdullah, Jumat Salimon, Nadia Salih, and Saiful Irwan Zubairi, 2014, Effect of Nano ZnO on the Optical Properties of Poly(vinyl chloride) Films, International Journal of Polymer Science, Vol. 2014, Article ID 697809, 6 pages
- [3] Ricardo J. B. Pinto, Sara Daina, Patrizia Sadocco, Carlos Pascoal Neto, and Tito Trindade, 2013, Antibacterial Activity of Nanocomposites of Copper and Cellulose, BioMed Research International Vol. 2013, Article ID 280512, 6 pages <http://dx.doi.org/10.1155/2013/280512>.
- [4] Mangesh D. Teli and Ravindra D. Kale, 2011, Polyester Nanocomposite fibers with Antibacterial Properties, Advances in Applied Science Research, Vol. 2 No.4, PP. 491-502
- [5] Omed Gh. Abdullah1, Bakhtyar K. Aziz, and Sarkawt A. Hussien, 2013, Optical Characterization of Polyvinyl alcohol Ammonium Nitrate Polymer Electrolytes Films, Chemistry and Materials Research, Vol.3 No.9.
- [6] Dezhi Qin, Guangrui Yang, Li Zhang, Xian Du, and Yabo Wang, 2014, Synthesis and Optical Characteristics of PAM/HgS Nanocomposites, Journal of Bull. Korean Chem. Soc., Vol. 35, No. 4.
- [7] W.A. Jabbar1, N.F. Habubi, and S.S. Chiad, 2010, Optical Characterization of Silver Doped Poly (Vinyl Alcohol) Films, Journal of the Arkansas Academy of Science, Vol. 64, pp. 101-106.
- [8] Khalid Al-Ammar, Ahmed Hashim and Maithem Husaien, 2013, Synthesis and Study of Optical Properties of (PMMA-CrCl₂) Composites, Journal of Chemical and Materials Engineering, Vol.1, No. 3, pp. 85-87.
- [9] T. Azib, H. Labiadh, M. Gaceur, D. Montero, S. Ammar, L. Smiri, T. Ben Chaabane, 2012, Structural, microstructural and optical characterization of polyol-mediated ZnS/PVP nanocomposite powders and films, Journal of Mater. Environ. Sci. Vol. 3, No.6.
- [10] Shaimaa A. Mohamed, A.A. Al-Ghamdi, G.D. Sharma, M.K. El Mansy, 2014, Effect of ethylene carbonate as a plasticizer on CuI/PVA nanocomposite: Structure, optical and electrical properties, Journal of Advance Research (2014)5, 79-86.
- [11] Tagreed K. Hamad, 2013, Refractive Index Dispersion and Analysis of the Optical Parameters of (PMMA/PVA) Thin Film, Journal of Al-Nahrain University, Vol.16, No.3, pp.164-170.
- [12] Nahida. J. H. & Marwa. R. F, 2011, Study of the Optical Constants of the PMMA/PC Blends, Eng. & Tech. Journal, Vol.29, No.4.
- [13] Adnan KURT, 2010, Influence of AlCl₃ on the optical properties of new synthesized 3-armed poly(methyl methacrylate) films, Turk Journal Chem Vol. 34, pp. 67 – 79.