

Nanocomposite Electrode Microbial Fuel Cell: A Promising Technology for Enhanced Power Generation from Yamuna Water

Darshan Malik¹, JayitaThakur², Sunita Singh³, Raj Kishore Singh⁴, Anita Kapur⁵, Amarjeet Kaur⁶, Shashi Nijhawan⁷, Anil Kumar⁸

^{1, 2, 3, 5, 7}Department of Biochemistry, Shivaji College, University of Delhi, New Delhi, India

^{4, 6}University School of Environment Management, GGSIP University, Dwarka, New Delhi, India

^cDirector, Department of Environment, Govt. of Delhi, India

Abstract: *Microbial Fuel Cell (MFC) is a promising and a futuristic technology for generating electrical energy from anaerobic fermentation of organic and inorganic matter present in the waste water. The performance of MFCs are dependent on various factors like the type of proton exchange system, the type of electrodes, the use of mediators and nitrogen gas sparging. MFCs for waste water treatment incur high cost of components which is a major barrier in commercializing the fuel cells. In this study we examined several parameters which could affect MFC operation. Anode performance and proton exchange membranes are important factors in deciding the efficiency of MFCs for large scale applications. Highly efficient Ni-coated carbon cloth electrodes that are electrometrically and biologically stable were synthesized at a much lower cost by chemical vapour deposition. These nanocomposite electrodes led to almost tenfold increase in the columbic efficiency as compared to the conventional electrodes. The use of the salt bridge which attributes to the higher internal resistance was replaced by the Nafion membrane leading to an increase in the current output. The rate of electron transport from the substrate to the anode by the bacterias showed a significant increase in the power generation by the use of redox mediator like Methylene blue. Thus, our current study demonstrates that using Yamuna water with nanocomposite electrodes in MFCs is a promising technology for the enhanced production of bioenergy.*

Keywords: MFC, Nanocomposite electrodes, Chemical vapour deposition, Mediators, Methylene blue, Nafion membrane, Yamuna water.

1. Introduction

Microbial Fuel Cell (MFC) harnesses the metabolism of micro organisms converting their chemical energy into electrical energy. The power generation in MFC is of great interest as this technology may provide a new method to offset wastewater treatment plant operating costs and less sludge production. The approach will be helpful in waste water treatment as well is in a clean and sustainable energy (Lovely, 2006). The MFC that uses waste water as fuel can produce electrical power and reduce the Biological Oxygen Demand (BOD) loading of the waste water simultaneously (Rahimnejad et al, 2012 and TerHeijne, 2006).

Anode performance is an important factor in deciding the efficiency of MFC for large scale applications. It is central to various bio-electrochemical reactions and helps to mediate electron transfer to the electrode from exo-electrogens (Lovely, 2006 and Liu 2011). Hence it is important to improve the material and design of the anode to enhance the MFC output. Increased surface area, high electrical conductivity, chemical stability and sustainability of its properties with time are some of the important criteria which can influence the performance of MFC (Mohanakrishna *et al*, 2012).

Many forms of carbon based materials with modifications have been studied viz., carbon cloth (Cheng, 2006), carbon paper (Min and Logan 2004), carbon felt (Liu, 2005) and carbon foam (Choudhuri and Lovely, 2003). The available surface of the anode can be clogged by the microbial

growth thus hindering the diffusion of the substrate and transport of the electrons. New strategies have been developed to improve the conductivity of the anode. It has been investigated that carbon based anodes modified with polymers (Scott, 2007 and Jiang, 2009), carbon nanotubes (Tsai, 2009) and new composite anodes (Qiao *et al*, 2008 and Zou, 2008) are being used to enhance the electron transport from the microbes to the electrodes. The process of thermal annealing helped in the synthesis of nanoparticles of Ni, Pd and Fe. Fe catalyzed multi-walled carbon nanotubes (MWCTs) were synthesized through chemical vapour deposition. Significant increase in power density was observed with these nanomodified electrodes (Schellar *et al*, 2009).

The second most important component in MFCs is the proton conducting material. These proton bridges allow protons to transport to the cathode and physically separate the anode and cathode compartments. The different materials which can be utilized as proton conductors include salt bridges, Ultrex membranes, and fluoropolymer-containing cation exchange material like Nafion (Bond and Lovely, 2003). The problems associated with salt bridge as a conducting material is its high internal resistance which lowers the coulombic efficiency of the MFC. In comparison, Nafion exchange membrane is a better proton exchanger, as it provides high ionic conductivity (Min *et al* 2005). The substrate plays a significant role in the amount of electrons being generated in a fuel cell. Some substrates are capable of producing a higher columbic yield as compared to some of the more common sugars used. Glucose is reported as the

most commonly used substrate for bacterial culture (Rabaey, 2003).

To improve the power generation in MFCs the understanding of charge transport between microbes and electrode interface plays a pivotal role (Du Z., 2007). Electron transport from substrate to electrodes in MFCs can be explained by two mechanisms (1) The direct transfer of electrons from the outer cell membrane to the electrode (Kim *et al*, 2002), (2) The transfer of electrons through mediators or shuttles (Uwe Schroder, 2011). There are various soluble chemical compounds which act as mediators of electron transportation between microbes and the anode. The different dye molecules like Methylene blue (Zhou *et al*, 2007), Methyl orange, Methyl red, Bromocresol green (Taskan *et al*, 2014) and Neutral red (Park *et al*, 2000) have also been used as an electron mediator.

In this study, we have examined several factors that could affect MFC performance: electrode composition (conventional and nanocomposite electrodes), proton conducting material (salt bridge and Nafion membrane) and the effect of Methylene blue as a mediator.

2. Materials and Methods

2.1 Sampling of water from River Yamuna

Water samples were collected in sterilized bottles from Nizamuddin Bridge from the Yamuna River in Delhi. While sampling, care was taken to collect the sample from the middle of the river, in order to rule out water contamination due to human settlements on the banks.

2.2 Physico-chemical analysis of Yamuna water

The water was processed immediately post collection, to ensure that the water profile is not affected by storage. The various parameters like pH, Dissolved Oxygen (DO) and Biological Oxygen Demand (BOD) and Chemical Oxygen Demand (COD) were estimated using pH meters and titrimetric methods (APHA, 2005).

2.3 Construction of MFC using conventional electrodes with salt bridge/Nafion membrane as proton exchanger

The dual chamber microbial fuel cell was constructed as follows: Separate cathode and anode chambers were constructed and sealed after the addition of the required sample. The anaerobic conditions in the anode chamber were maintained by sparging with nitrogen. A salt bridge was created using 10% agar and 5% NaCl. Alternatively, Nafion®117 membrane (Sigma) was used as a proton exchanger. The conventional electrodes were prepared using carbon cloth. Substrate of glucose (3g/L) was added to the anode chamber containing 500 ml of Yamuna water. Methylene blue (300µM) was used as a mediator as per the requirement of set-up. The electricity generated was measured using a multimeter (Sanwa CD770) at a regular interval of 2 hrs for 36 hours.

2.4 Microbial fuel cell construction using nanofabricated electrodes and Nafion membrane as proton exchanger

The microbial fuel cell was then modified for enhanced power generation. Nano modification of the conventional carbon cloth electrode was performed. Chemical Vapor Deposition followed by thermo-annealing of nickel (Ni) was carried out by placing the nickel-coated electrode in a quartz tube and heated in a furnace at a temperature of 800-1000°C. These electrodes were then used for electricity generation using 500 ml of Yamuna water, with glucose as a substrate (3g/L). Methylene blue (300µM) was used as a mediator as per requirement of the set-up. Nafion membrane was used as the proton exchange membrane to separate anode and cathode chambers. The electricity generated was measured using a multimeter (Sanwa CD770) at a regular interval of 2 hrs for 36 hours.

3. Results

3.1 Bioelectricity generated in MFC using salt bridge and Nafion membrane as proton exchanger

Yamuna water was used as inoculum in the dual chambered MFC to generate electricity. The traditional salt bridge proton exchanger generated electricity ranging from 0.4-0.62 V over a period of 36 hrs, with the highest output at 12hrs. The use of a Nafion proton exchange membrane led to the generation of electricity ranging from 0.6-1.22 V over the same period of time, with the highest output at 14hrs (Table 1). These were then analyzed and compared for a better understanding of the importance of proton exchangers in microbial fuel cells (Fig. 1& 2).

Table 1: Potential difference generated at the conventional electrodes using different proton bridges, in the presence and absence of mediators

Time (hrs)	Potential Difference (Volts)			
	Conventional electrodes (salt bridge)		Conventional electrodes (Nafion)	
	Without Mediator	With mediator	Without mediator	With mediator
0	0.4	0.5	0.6	0.8
2	0.44	0.53	0.68	0.84
4	0.48	0.55	0.7	0.89
6	0.52	0.58	0.74	0.93
8	0.58	0.61	0.79	0.96
10	0.6	0.62	0.83	1.1
12	0.62	0.65	0.94	1.5
14	0.62	0.68	1.22	1.8
16	0.56	0.71	1	2.1
18	0.53	0.7	0.97	2
20	0.51	0.68	0.9	1.7
22	0.5	0.66	0.86	1.5
24	0.47	0.63	0.82	1.1
26	0.45	0.61	0.78	0.97
28	0.43	0.59	0.75	0.94
30	0.42	0.56	0.72	0.92
32	0.41	0.54	0.66	0.88
34	0.4	0.52	0.62	0.85
36	0.38	0.49	0.57	0.81

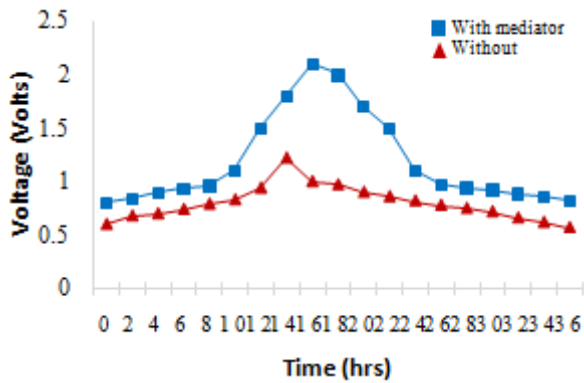


Figure 1: The generation of power in MFC the salt Bridge, using conventional electrodes in the presence and absence of mediators. Yamuna water was used as a source of electricity using conventional electrodes. Addition of Methylene blue as a mediator led to increased power generation (maximum of 0.71 Volts was generated in the presence of mediator as compared to 0.62 Volts in the absence of mediator).

3.2 Bioelectricity generated in MFC using the mediator Methylene blue

The effect of the mediator Methylene blue on the generation of power in double chambered MFC system was studied. The use of conventional electrodes in the presence of Methylene blue (300µM) using Salt bridge showed the generation of electricity ranging from 0.5-0.71 V over a period of 36 hrs (Fig. 1 & 2).

Fig. 2 Power generation in the MFC with Nafion membrane, using conventional electrodes in the presence and absence of mediators. Yamuna water was used as a source of electricity using conventional carbon cloth electrodes. Addition of Methylene blue as a mediator led to increased power generation (maximum of 2.1 Volts was generated in the presence of mediator as compared to 1.0 Volts in the absence of mediator).

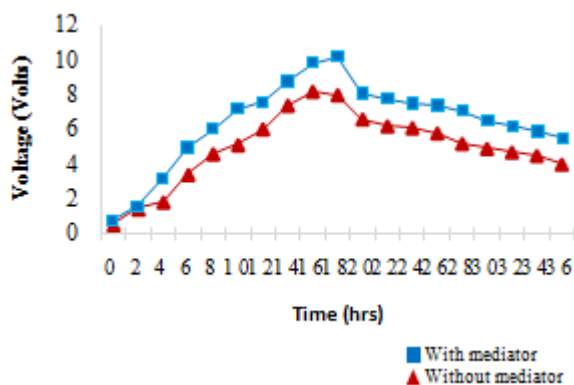


Figure 3: Power generation in the MFC with Nafion membrane, using nanofabricated electrodes in the presence and absence of mediators. Yamuna water was used as a source of electricity. Addition of Methylene blue as a mediator led to increased power generation (maximum of 10.2 Volts was generated in the presence of mediator as compared to 8.2 Volts in the absence of mediator).

The highest output of electricity was observed at 16hrs. Upon the use of Nafion proton exchange membrane with conventional electrodes in the presence of Methylene blue electricity generated ranged from 0.8-2.1 V for the same time period, with the highest power output recorded at 16hrs (Fig. 2). The use of nanocomposite electrodes in the presence of Methylene blue led to the generation of electricity ranging from 0.8-10.2 V over 36hr time period, where the highest output of power was recorded at 18hrs (Fig. 3). These results were further analyzed in order to understand the contribution of external mediators in the generation of bioelectricity in MFCs (Fig 4).

3.3 Bioelectricity generated using nanocomposite and conventional electrodes

The conventional carbon cloth electrodes of the MFC were improved upon by Ni coating of the carbon cloth, thus fabricating a secondary microporous structure. These nanocomposite electrodes showed the generation of electricity ranging from 0.5-8.2 V over a period of 36 hrs, with the maximum output recorded at 16hrs (Fig. 5). In comparison, the conventional electrodes showed electric current production ranging from 0.4-0.62 V, with the maximum output recorded at

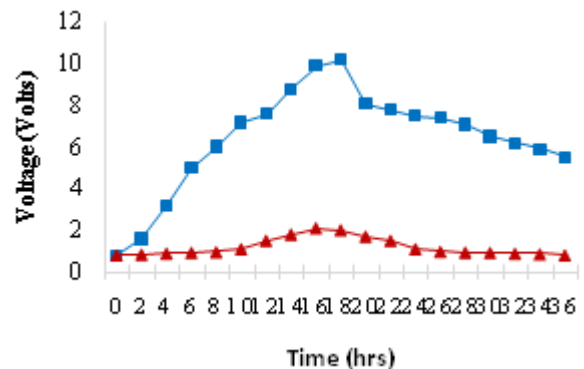


Figure 4: Comparison of the performance of the MFCs with Nafion membrane, using different electrodes in the presence of mediators. The presence of mediators has been observed to further accentuate the efficiency of the nanofabricated electrodes in comparison to the conventional electrodes (maximum of 10.2 Volts was generated using the improved anodes as compared to 2.1 Volts by using conventional electrodes) in the presence of a mediator.

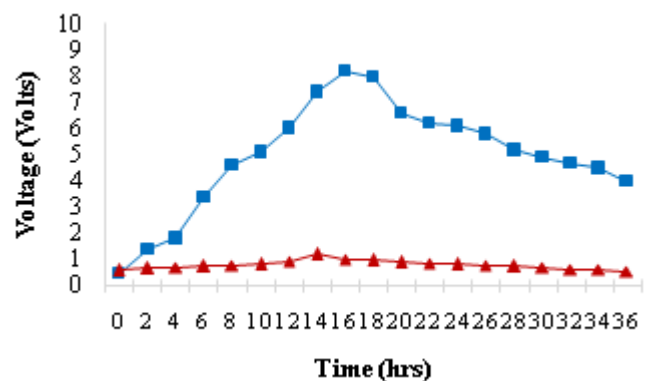


Figure 4: A comparison of the performance of the MFCs with Nafion membrane, using different electrodes in the absence of mediators. The use of nanofabricated electrodes

highly enhance the power generated by the MFC as compared to the conventional electrodes (maximum of 8.2 Volts was generated using the improved anodes as compared to 1.0 Volts by using conventional electrodes) in the absence of a mediator.

12 hrs (Fig. 1). The trend in the power generation by nanocomposite electrode in MFC using Nafion membrane in presence and absence of mediators was further analyzed (Table 2).

Table 2: Potential difference generated at the conventional electrodes and nanomodified electrodes in the presence and absence of mediators. (CE -Conventional electrodes; NE- Nanocomposite electrodes)

Time (hrs)	Potential Difference (Volts)			
	Without mediator		With mediator	
	CE	NE	CE	NE
0	0.6	0.5	0.8	0.8
2	0.68	1.4	0.84	1.6
4	0.7	1.82	0.89	3.2
6	0.74	3.4	0.93	5
8	0.79	4.6	0.96	6.04
10	0.83	5.12	1.1	7.2
12	0.94	6.04	1.5	7.6
14	1.22	7.4	1.8	8.8
16	1	8.2	2.1	9.9
18	0.97	8	2	10.2
20	0.9	6.6	1.7	8.11
22	0.86	6.2	1.5	7.8
24	0.82	6.1	1.1	7.5
26	0.78	5.8	0.97	7.4
28	0.75	5.2	0.94	7.1
30	0.72	4.9	0.92	6.5
32	0.66	4.7	0.88	6.2
34	0.62	4.5	0.85	5.9
36	0.57	4	0.81	5.5

3. Discussion and Conclusion

The Yamuna water has a consortium of microbes which include *Lactobacillus plantarum*, *L. casei*, *Streptococcus lactis*, *Rhodospseudomonaspalustris*, *Rhodobactersphaeroides*, *S. cerevisiae*, *Candida utilis*, *Streptomyces albus*, *S. griseus*, *Aspergillus* and *Mucorhiemalis* (Shrivastava et al, 2012). These microbes assist in the generation of power in the MFC in the present study.

Carbon cloth, carbon paper and carbon black are widely used as anode in MFCs because of their good conductivity, non corrosivity and stability in microbial inoculums. However the power generated by these conventional electrodes in MFC can be improved upon by modifying the anodes. Since the structure of the supporting material of anode coating can affect the performance of MFC to a large extent, therefore in the present study modified nanocomposite electrodes have been employed. Ni coated carbon cloth electrodes impressively outperform the conventional carbon cloth electrodes owing to the formation of microscale porous

structure which provide more surface area with active functional groups for the transfer of electrons. In the current study approximately ten fold increase (8.2 Volts using nanocomposite electrodes and 1.0 Volt using conventional electrodes) in power generation was observed upon the use of nanocomposite electrodes in comparison with the conventional electrodes. This suggests that the modified Ni coated nanocomposite anode substantially increase the power generation and is a promising anodic material for the fabrication of MFCs.

In a dual chambered MFC system, the internal resistance which is a function of proton exchange system plays a critical role in the power production. A comparative study of the power output in MFC with salt bridge and Nafion membrane as proton exchanger was carried out. The low power output (0.62 Volts) with salt bridge is credited to the higher internal resistance of the salt bridge system. The better performance of MFC with Nafion membrane (1.22 Volts) is attributed to excellent proton conductivity and selective ion permeability.

As mediators play a key role in power generation, the performance of MFC using nanocomposite / conventional anode electrodes was investigated with and without mediator (Methylene blue). In the case of nanocomposite electrodes, an increase in power output was observed (10.2 Volts with mediator & 8.2 Volts without mediator). A similar trend was observed in the case of conventional electrodes (2.1 Volts with mediator & 1.22 Volts without mediator). This increase in potential difference can be explained by the diffusion of redox active Methylene blue that shuttles the electrons between the microbes and the electrodes (Fig. 5). However, the increase in power output was not found to be significant on addition of mediators. This may be due to the presence of metal ions like sulphates, ferric and nitrate in the Yamuna water which act as natural mediators in electron transport from the microbes to the electrodes.

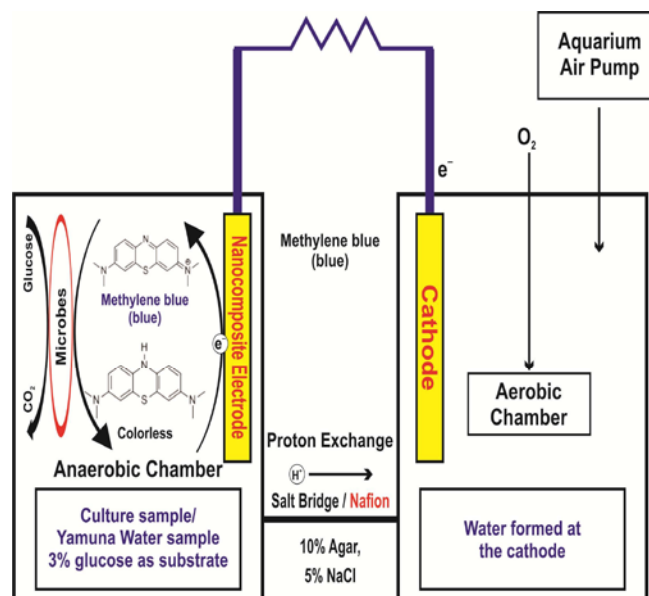


Figure 5: Schematic representation of a dual chamber microbial fuel cell assembly consisting of nanocomposite electrode. Methylene blue used as redox mediator for enhanced power generation.

In our previous work, we had utilized conventional components for the construction of MFC which had led to a low output of electricity; the highest being 0.62 Volts (Malik et al, 2014). Modifications of the traditional electrodes in the current study, in the form of nanocomposite electrodes has led to approximately 10 fold increase in the generation of electricity (8.2 Volts). Thus, our work provides a new platform for designing cost effective and improved electrodes with the aid of nanocomposite material. These electrodes provide a suitable environment for microbes to maintain their electrochemical activity and generation of power. The ability of MFCs to use complex organic materials allows the use of Yamuna water as fuel. Hence the modified MFC constructed are capable of removing pollutants while simultaneously enhancing electrical energy. The robustness of MFCs and their application in bioremediation make it a viable option for energy harvesting.

4. Future Plans

Through our current study we have shown that the water of the river Yamuna is an excellent source for the generation of electricity. The present Ni-coated nanocomposite electrode in the MFC has given an immense increase in power generation. In future the optimization of the mediator concentration, variation of substrates and proton exchange membrane will be carried out to make it more cost effective and sustainable MFC. We have currently taken low volumes of inoculum (Yamuna water), the use of higher volume of sample can be tested for increased efficiency of the MFC. Further optimization studies are being carried out to significantly enhance the power density generated.

5. Acknowledgement

The financial support provided by University of Delhi in Innovation Research Project-SHC 203 to undertake this research work is gratefully acknowledged. We thank Mr. Puru Sachan for the experimental assistance.

References

- [1] Lovley DR. (2006) Bug juice: Harvesting electricity with microorganisms. *Nat Rev Microbiol.* 4: 497–508.
- [2] Rahimnejad M, Ghasemi M, Najafpour GD, Ismail M, Mohammad AW, Ghoreyshi AA, Hassan SHA, (2012) Characterization and application studies of self-made Fe₃O₄/PES nanocomposite membranes in microbial fuel cell. *Electrochimica Acta* 85: 700–706.
- [3] Ter Heijne A, Hamelers HVM, Wilde V. De, Rozendal RA, Buisman CJN (2006) *Environmental Science and Technology* 40: 5200–5205.
- [4] Liu X-W, Sun X-F, Huang Y-X, Sheng G-P, Wang S-G, Yu H-Q.(2011) Carbon nanotube/chitosan nanocomposite as a biocompatible biocathode material to enhance the electricity generation of a microbial fuel cell. *Energy Environ Sci.* 4:1422–7.
- [5] Mohanakrishna G, Krishna Mohan S, Venkata Mohan S, (2012) Carbon based nano tubes and nano powder as impregnated electrode structures for enhanced power generation: Evaluation with real field wastewater. *Applied Energy* 95: 31-37.
- [6] Cheng S, Liu H, Logan BE (2006) Increased power generation in a continuous flow MFC with advective flow through the porous anode and reduced electrode spacing. *Environ. Sci. Technol.* 40: 2426-32.
- [7] Min B, Logan BE (2004) Continuous electricity generation from domestic wastewater and pure organic substrates in a flat plate microbial fuel cell (FPMFC). *Environ. Sci. Technol.* 2004, 38, 5809-14.
- [8] Liu H, Cheng SA, Logan BE (2005) Production of electricity from acetate or butyrate using a single-chamber microbial fuel cell. *Environ. Sci. Technol.* 39:658–62.
- [9] Choudhuri SK, Lovely DR (2003) Electricity generation by direct oxidation of glucose in mediatorless microbial fuel cells. *Nat. Biotechnol.* 21:1229.
- [10] Scott K, Rumbu GA, Katuri KP, Prasad KK, Head MI (2007) *Process Saf. Environ. Prot.* 85: 481.
- [11] Jiang D Q, Li B K (2009) Novel electrode materials to enhance the bacterial adhesion and increase the power generation in microbial fuel cells (MFCs). *Water Sci. Technol.* 59: 557-563.
- [12] Tsai HY, Wu CC, Lee CY, Shih EPJ (2009) *Power Sources.* 194: 199.
- [13] Qiao Y, Bao SJ, Li CM, Cui XQ, Lu ZS, Guo J (2008) *ACS Nano.* 2: 113.
- [14] Zou YJ, Xiang CL, Yang LN, Sun LX, Xu F, Cao Z (2008) *Int. J. Hydrogen Energy.* 33: 4856.
- [15] Rebecca Schaller, Yanzen Fan, Shoutao Xu, Alan Fern, Frank Chaplen, Hong Liu and Jun Jiao (2009) Fabrication of Nanomodified Anodes for Power Density Enhancement of Microbial Fuel Cells. *MRS Proceedings*(<http://dx.doi.org/10.1557/proc-1170-ro5-13>).
- [16] Bond DR and Lovely DR (2003) Electricity production by *Geobacter Sulfurreducens* attached to electrodes. *Applied Environ. Microbiol.* 69 (3): 1548-55.
- [17] Min B, Cheng S, Logan BE (2005), Electricity generation using membrane and salt bridge microbial fuel cells. *Water Research.* 39: 1675-1686.
- [18] Chae KJ, Choi M, Ajayi FF, Park W, Chang I S, Kim IS (2008) Mass transport through a proton exchange membrane (Nafion) in microbial fuel cells. *Energy and Fuels.* 22 (1): 169-176.
- [19] Harnisch F, Schroder U, Scholz F (2008) The suitability of monopolar and bipolar ion exchange membranes as separators for Biological fuel cells. *Environ. Sci. Technol.* 42: 1740-1746.
- [20] Liu H, Cheng SA, Logan BE. (2005) Production of electricity from acetate or butyrate using a single-chamber microbial fuel cell. *Environ. Sci. Technol.* 39:658–62.
- [21] Rabaey K, Lissens G, Siciliano SD, Verstraete W (2003) A microbial fuel cell capable of converting glucose to electricity at high rate and efficiency. *Biotechnol. Lett.*, 25:1531-1535.
- [22] Du Z, Li H, Gu T (2007) A state of the art review on microbial fuel cells: A promising technology for wastewater treatment and bioenergy. *Biotechnology Advances.* 25: 464–482.
- [23] Kim HJ, Park HS, Hyun MS, Chang IS, Kim M, Kim BH (2002) A mediatorless microbial fuel cell using a metal reducing bacterium *Shewanella putrefaciens*. *Enzyme Microbial Technology.* 30: 145-152
- [24] Uwe, Schröder (2011) Anodic electron transfer mechanisms in microbial fuel cells and their energy efficiency. *Physical Chemistry Chemical Physics* 9: 2619-2629.

- [25] Zou Yong-Jin, Su Li-Xian, Xu Fen, Yang Li-Ni (2007) E coli microbial fuel cell using new methylene blue as electron mediator. *Chemical Journal of Chinese Universities- Chinese* 28: 510-513.
- [26] Taskan E, Ozkaya B, Hasar H (2014) Effect of different mediator concentrations on power generation in MFC using Ti-TiO₂ electrode. *International Journal of Energy*. 4 (1): 9-11.
- [27] Park, DH and Zeikus, JG (2000) Electricity generated in microbial fuel cells using neutral red as an electrophore. *Applied and Environmental Microbiology*, 66: 1292-1297.
- [28] Standard Method, for the examination to water and waste water. *APHA* 20th ed., 1998.
- [29] Shrivastava JN, Raghav N, Singh Am (2012) Laboratory Scale Bioremediation of the Yamuna Water with Effective Microbes (EM) Technology and Nanotechnology, *J Bioremed. Biodeg.* 3(8) 160.
- [30] Malik D, Singh S, Thakur J, Kishore R, Kapur A, Nijhawan S, (2014) Microbial Fuel Cell: Harnessing Bioenergy from Yamuna Water. *International Journal of Science and Research*, 3 (6): 1076-1081.

Author Profile



Dr. Anil Kumar (Ph.D. from IIT Kanpur & MBA) is serving as the Director at the Department of Environment Govt. of Delhi. He also holds the additional charge of Executive Officer, Energy Efficiency & Renewable Energy Management Centre of Govt. of Delhi. He has been the Post Doctoral Fellow at Department of Biochemistry, University of Medicine & Dentistry of New Jersey, USA. He has worked at Institute of Genomics and Integrative Biology (CSIR) and done Research and Development work in the area of Environmental Biotechnology.



Dr. Shashi Nijhawan (M.Sc & Ph.D), serving as Principal, Shivaji College, University of Delhi, Raja Garden, New Delhi since 2009. Earlier worked as Associate Professor in Department of Biochemistry, Deshbandhu College, University of Delhi. Her research areas of interest are Enzymology, Cell Biology and Molecular Biology. Published number of research papers in journals of National and International repute. Organized Workshops and International Conferences and presented no. of research papers in the National and International Conferences. She is the Project Investigator of an University Innovation Project (SHC 203) titled "Biochemical assessment of toxic heavy metals in bacterial strain growing in the polluted water: A step towards Bioremediation".



Dr. Anita Kapur (M.Sc & Ph.D), serving as Vice Principal, Shivaji College, University of Delhi, Raja Garden, New Delhi. Her research work is in Archegoniatae and Cell Biology. Has published research papers in journals of high impact factors. She is **Project Investigator** of University Innovation Project (SHC 203).



Dr. Darshan Malik (M.Sc & Ph.D), working as an Associate Professor in Department of Biochemistry, Shivaji College, University of Delhi. She is a recipient of Erasmus Mundus (E.U) Scholarship for Academic Exchange Program (Apr. 2009), worked for six months in the Department of Biology, Norwegian University of Science and Technology, Trondheim, Norway. Her research areas of interest are Cell Biology, Molecular Biology, Human Physiology, Environment and Disaster management. Published several research papers in journals of National and International repute. She has edited / published two books. Has organized Workshops and International

Conferences. Presently supervising Ph.D. students registered with Guru Gobind Singh Indraprastha University, New Delhi, India. She is involved in research work on Bioremediation and guiding Undergraduate students of **University Innovation Project (SHC 203)**. She is also involved in the Environment & Disaster management plan of Delhi.



Dr. Amarjeet Kaur (M.Sc & Ph.D), serving as Professor in University School of Environment Management (USEM), Guru Gobind Singh Indraprastha University, New Delhi, India. She has more than 22 years of experience in research and training. Her areas of specialization are Ecology & sustainable development, Environmental Biotechnology and Geo-information System. She has worked as Principal /Co-Principal Investigator of various International/National projects related to Environment Management. She has visited USA, UK, Bangkok and Japan in connection with study exchange programmes and conferences. She was also involved in Environmental Management Plan of Delhi using Remote Sensing Technology and GIS. Presently she is leading a team of experts in reviewing/upgrading the District Disaster Management plan of Delhi as Director, Centre for Disaster Management of GGS Indraprastha University. She has twenty years experience of providing consultancy to various Industries.



Dr. Sunita Singh (M.Sc & Ph.D), working as an Assistant Professor in the Department of Biochemistry of Shivaji College, University of Delhi. Her research areas of interest are Nano-biocatalysts and their applications, Chemical modification and chemical crosslinking of proteins and Industrial applications of enzymes. She has twenty research publications in National and International journals. Participated & presented papers /posters in National & International Conferences. She is the recipient of Woman Scientists Scheme (SR/WOS-A/LS-181/2007) of Department of Science & Technology (DST) for Research in Basic/Applied Sciences. She has availed Young Scientist Award of DST (under SERC FAST Track Scheme for Young Scientists 2001-02) and Senior Research Associate (Pool Officer) of Council of Scientific and Industrial Research (CSIR) (Pool no. 7446 A).



Jayita Thakur (M.Sc), working as an Assistant Professor in the Department of Biochemistry of Shivaji College, University of Delhi. Presently involved in University of Delhi Innovation Project along with the co-authors of this paper. She is pursuing her numerous National and International conferences, workshops and symposia. The main areas of interest include molecular biology, cell biology and genetics. Is actively involved in research work, with specialized skills in tools and techniques related to molecular biology and cell biology.



Dr. Raj Kishore Singh (M.Sc & Ph.D), working at University School of Environment Management (USEM), Guru Gobind Singh Indraprastha University, New Delhi, India. Research areas of interest are Industrial Pollution, Solid Waste Management, Contaminated Site Management, and Wastewater Treatment Technology. Has 10 research publications to his credit in peer reviewed journals. Twelve years of experience as co-coordinator and project manager of several consultancy projects. Presently in the Editorial Board of IJRASET and IJRAASE.