



2.3 Post-processing

These include

- Domain geometry and grid display
- Vector plots
- 2D and 3D surface plots
- Particle tracking
- Line and shaded contour plots

2.4 Mesh generation in gambit and specifying boundary conditions

It is a software package designed to help to analyst and build to a mesh around the geometry. After meshing zone types are specified, the created mesh can be exported into the solver fluent 6.3.26

The grids were made very fine at the surfaces and coarse as it goes away from the body. Domain extending from 2l major length of the module at the face and 1.5l times behind the geometry and 0.5l of the top and bottom of the geometry model and pressure 50 bar and mach 9.0.

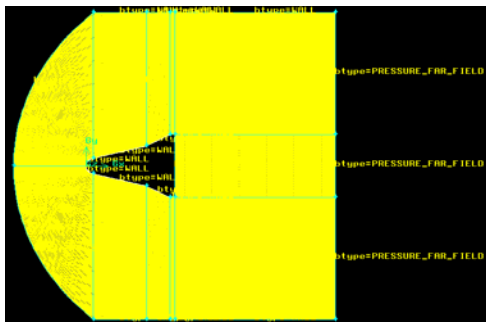


Figure 1: Without spike meshed and boundary conditions

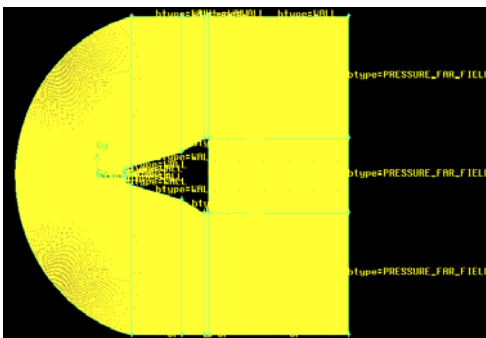


Figure 2: With spike meshed and boundary conditions

Pressure inlet condition was set to the flow inlet where inlet pressure are specified and pressure far field was set to the pressure outlet and top and bottom of model and body was set to the wall boundary condition.

3. Governing Equations

Computational Fluid Dynamics is concerned with numerical solution of differential equations governing conservation of mass, momentum, and energy in moving fluids. The equation of conservation of mass, momentum, and energy were solved for getting the solution.

3.1 Conservation of mass

$$\frac{\partial \rho}{\partial t} + \Delta \cdot (\rho v) = 0$$

3.2 Conservation of Momentum

$$\frac{D u}{D t} = -\frac{\partial p}{\partial x} + \frac{\partial \tau_{xy}}{\partial x} + \frac{\partial \tau_{yz}}{\partial y} + \frac{\partial \tau_{zx}}{\partial z} + \rho f_x$$

3.3 Conservation of Energy

$$\frac{\partial \epsilon}{\partial t} = -\left(-u \frac{\partial \epsilon}{\partial x} + v \frac{\partial \epsilon}{\partial y} + \frac{p \partial u}{\rho \partial x} + \frac{p \partial v}{\rho \partial y}\right)$$

4 Validation

The below figure shows the experimental scleren graph in this graph it shows the shock wave pattern and the fluent generated shock wave pattern for the same experimental input so we are comparing the both graphs for validation .hence, the case is validated.

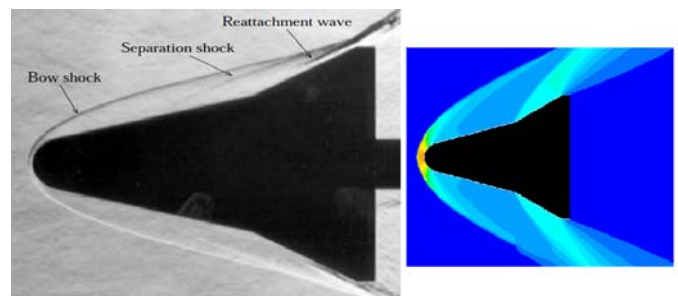


Figure 3: Comparison of without spike and with spike shock waves generated

The below figure shows the graph of with spike and without spike fluent generated graph of Ch vs. X/L.

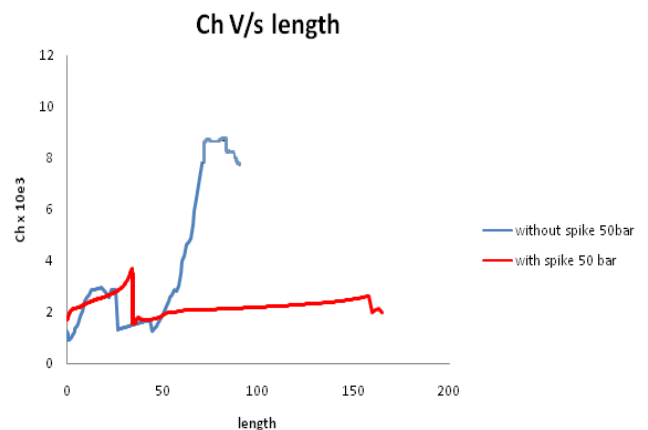


Figure 4: Comparison of fluent generated heat transfer coefficient spike vs. length of 50 bar with spike and without spike

4. Results and Comparisons

A. Temperature contour plots of without spike

From the temperature contour observe that temperature is maximum at just ahead of the blunt body without spike and at the starting point of the bow shock temperature is about the 820k .This shock wave scatter the heat into the flow field so temperature decreases along the body.

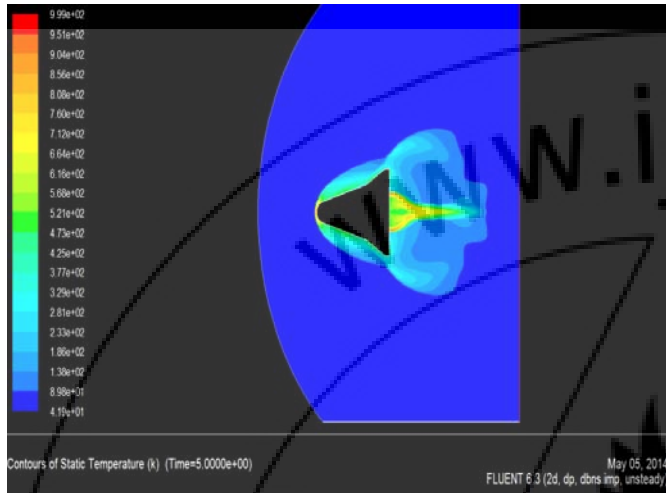


Figure 5: Temperature contour Profile of without spike 50 bar

B. Temperature contour plots of with spike

From the below contour with spike blunt body temperature at the nose starting point is 625 k. The shock wave scattered along the length and decreases the temperature along physical domain.



Figure 6: Temperature contour plots of with spike 50 bar

C. Pressure contours plots of without spike

From the pressure contour observe that pressure is maximum at just ahead of the blunt body without spike and at the starting point. Without spike body bow shock pressure is about the 0.4020 pa. This shock wave scatters the heat into the flow field so pressure decreases along the body and with spike nose pressure is 0.208 pa.

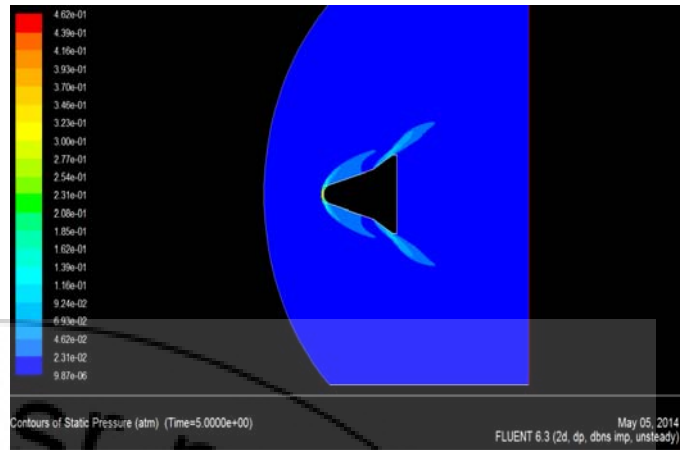


Figure 8: Pressure profile of without spike model 50 bar

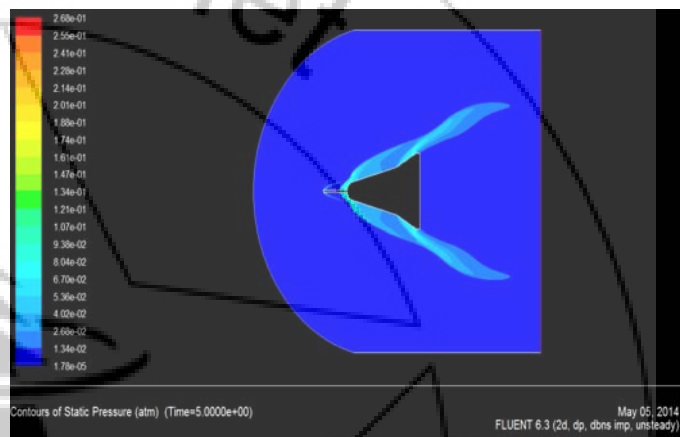


Figure 9: Pressure profile of with spike model 50 bar

D. Variation of Ch vs. length for without-spike 50 bar graph

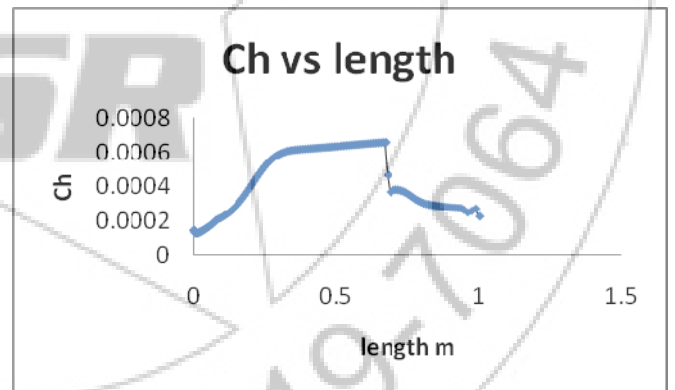


Figure 10: Variation of Ch for length for without spike case 50 bar

From the graph shows the variation of Ch with respect to different length as we increase the Ch along the length and there is sudden decrease for half of the body length and gradually decreases' along the body length.

E. Variation of Ch vs. length for with-spike 50 bar with spike graph

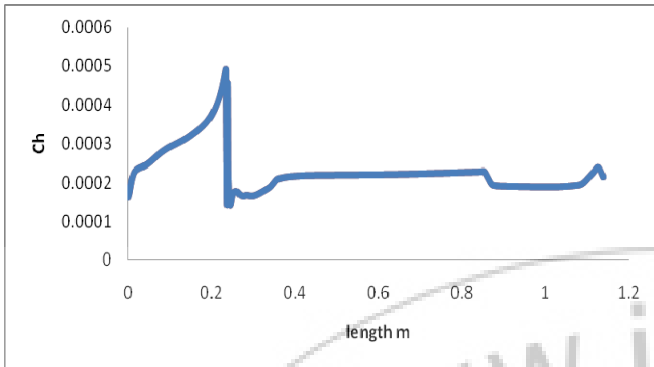


Figure 11: Variation of Ch for length for with spike case

The above graph shows the variation of Ch with respect to different length as increases the Ch along the length and there is sudden decrease for half of the body length and gradually increases and maintains constant profiles and starts decrease to the certain length along the body length.

F. Variation of heat flux vs temperature for without spike

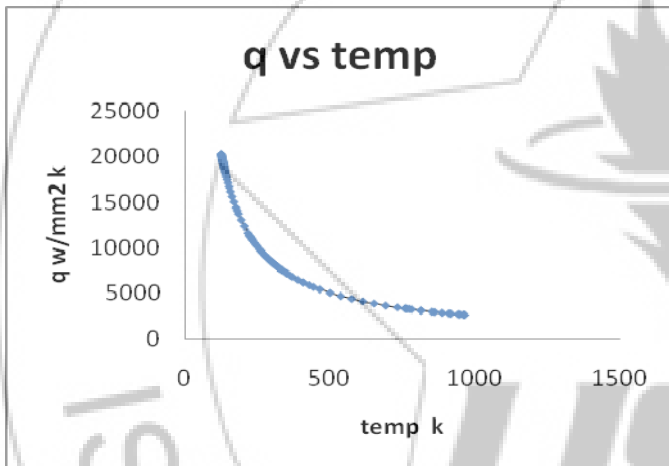


Figure 12: Variation of heat flux for temperature for without spike

G. Variation of heat flux vs. temperature for without spike

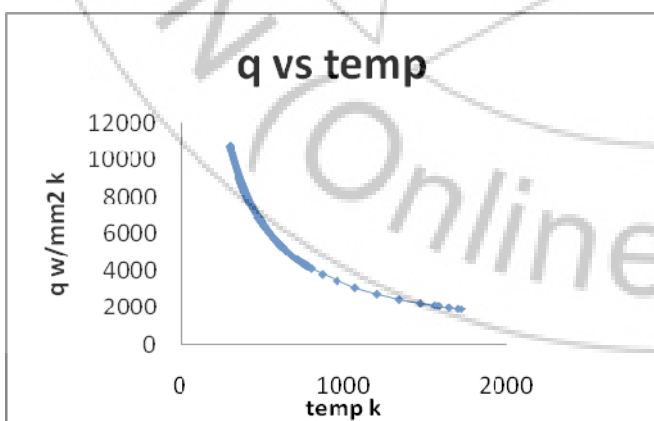


Figure 13: Variation of heat flux for temperature for with spike

From graphs figure: 12 and figure: 13 show the variation of maximum temperature with respect to heat flux as decrease and the pressure increasing.

H. Variation of temperature vs. length of the without spike model

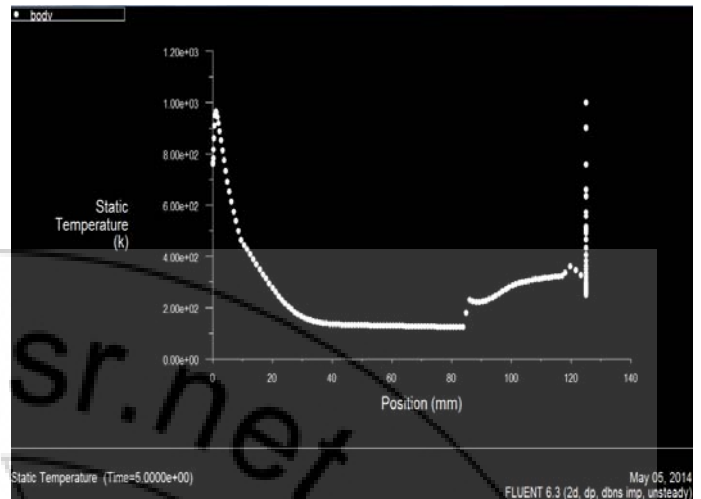


Figure 14: Comparison of temperature vs. model length of without spike

I. Variation of temperature vs. length of the with spike model

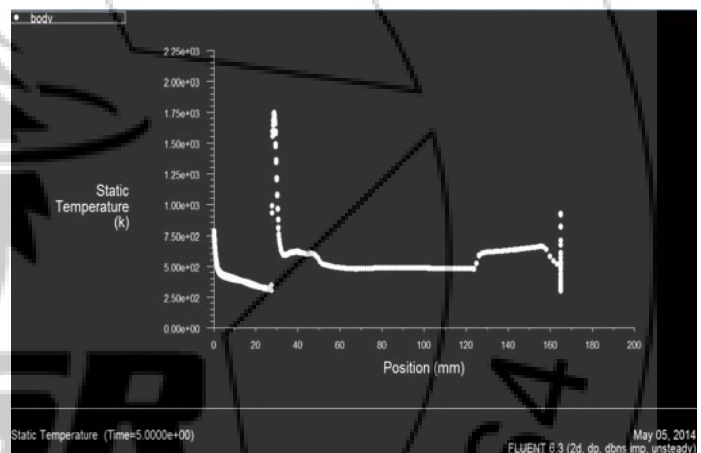


Figure 15: Comparison of temperature vs. model length with spike

## 6. Conclusions

In spite of the decades of research into hypersonic flow, there are still many challenges to analyzing and designing high-speed vehicles. Recent events such as the Columbia accident are clear evidence that there are still “unknown unknowns” in the field of hypersonic flight that even our best experimental or numerical analysis cannot adequately predict.

While analyzing both without and with spiked hypersonic vehicle the temperature of the spiked vehicle reduces at the nose due to reduction in the bow shock wave and also pressure of the nose vehicle so that there is less possibility or more time to take disaster of the hypersonic re-entry vehicles.

## 7. Scope for future work

Introduction of spike in hypersonic vehicles are there. Since work have been going in the hypersonic vehicle. Very few people are doing work on introducing spike on the hypersonic re-entry vehicle. Since No static temperature data exists for Mach number in the range 8-14. Also data on large nose radius do not exist.

Keeping in view of future requirements in the country as well as to generate data base towards extending some of existing static temperature ,correlations , a detailed CFD study of hypersonic laminar surface flows on several spiked models this will have relevance to reentry missions.

## References

- [1] Ferry F.J. Schrijer and Fulvio Scarano and Bas W. van Oudheusden [1] "Experiment on Hypersonic Boundary Layer Separation and Reattachment on a Blunted Cone-Flare using Quantitative InfraRed Thermography" 2003.
- [2] Antonio Viviani and Giuseppe Pezzella [2] "Heat Transfer Analysis for a Winged Reentry Flight Test Bed" 2005.
- [3] M.Y.M. Ahmeda N. Qin [3] "Recent advances in the aerothermodynamics of spiked hypersonic vehicles" 2011
- [4] Zonglin Jiang and Yunfeng Liu and Guilai Han [4] "Drag reduction under non-zero attack angles and avoid the severe aerodynamic heating, a new concept of the Non-ablative Thermal Protection System (NaTPS) for hypersonic vehicle". 2011.
- [5] N.Sreenivasa Babu. Dr. K. Jayathirtha Rao [5] "Aerodynamic drag and heating are the crucial in the thermal stability of hypersonic vehicles at various speeds"
- [6] Agosh M C [6] "Experiment Aerodynamic and Heat Transfer Analysis Over Spherical Blunt Cone"
- [7] Niranjana Sahoo [7] "Experiments on a Blunt Cone Model in a Hypersonic Shock Tunnel" (2007).
- [8] Zonglin Jiang Yunfeng Liu Guilai Han· Wei Zhao [8] "Experimental demonstration of a new concept of drag reduction and thermal protection for hypersonic vehicles"
- [9] Dr.B.Balakrishna, S. Venkateswarlu, Dr P. Ravinder Reddy.Flow [9] "Analysis of an Atmosphere Reentry Vehicle"(2012).
- [10] J.M.A. Longo [10] "Modeling of hypersonic flow phenomena"(2004).
- [11] Fei Li, Meelan Choudhari, Chau-Lyan Chang and Jeffery white [11] "Boundary Layer Transition over Blunt Hypersonic Vehicles Including Effects of Ablation-Induced Out-Gassing"
- [12] Zonglin Jiang, Yunfeng Liu and Guilai Han [12] "Experiment for Conceptual Study on Non-ablative TPS for hypersonic vehicle"