

Geographical Distance Based Multipath Routing With Temporal Features in Wireless Sensor Network

Nilesh P. Nivalkar¹, Anil D. Gujar²

¹TSSM's BSCOE&R, Department of Computer Engineering, Narhe, Pune-41, India

²TSSM's BSCOE&R, Department of Computer Engineering, Narhe, Pune, India-41

Abstract: *Wireless Sensor Network is the latest research field in the world of computer network as it contains different varieties of real time applications. In the wireless sensor network, the data collection, detection, data process as well as transmissions to the user is done by a small, entity sensor nodes functional in a remote area of a wireless sensor network. It has some key features like high aggregation rate, reliable data aggregation and transmission, reduced number of messages for setting up a routing tree, maximized number of overlapping routes. Due to the nodes mobility, the network changes dynamically where nodes are added as well as removed. In this paper we approach a data aggregation in wireless sensor network with the help of geographical based multipath routing. Here selection of routing path is done by using geographical distances which is useful to get better energy efficient packets which is travel over smaller distances towards the sink node. Multipath routing guaranteed that the path is reliable and in the case of failure of one path other paths are always available. At cluster head the data is aggregated and this data forwarded towards the sink. Temporal relation is also considered while sending data packets from every node to the sink node.*

Keywords: Wireless Sensor Networks, Energy Efficient, reliable, Geographical, Temporal

1. Introduction

Federation of electronics pasture, information technology is nothing but a wireless sensor network (WSN). It is spatially dispersed in individual devices that professionally sense physical or environmental conditions like sound, pressure, vibration, motion at different places etc [2]. The equation Sensing + CPU + Radio = Thousands of real time applications is based on the idea of WSN. With the help of radio frequency channel (RF) the sensor node which is small in size and present in WSN, gather the data, and process it at the time of communicating with other nodes in the network. Routing is nothing but the process of formative path among source and destination for data transmission. In this paper, we approach a data aggregation in network by implementing spatial based routing. Recharging sensor node is usually unfeasible due to the node deployment. That's why in wireless sensor network, the energy saving is one of the significant intend matter [3]. Also, power expenditure of sensors controlled by data transmission and reception. To prolong the lifetime of network should be required efficient energy and this is obtained by the scheming the routing protocol. Furthermore WSNs are a data ambitious network that generally manufactures big quantity of information that required to be routed frequently in a multihop fashion, towards the sink node. The data aggregation is one of the effectual techniques for saving energy in WSNs. Data in-network routing proposes for with obtainable dispensation ability transported by the intermediate sensor nodes along the routing paths. In this paper we approach a Geographical based multipath routing for in-network data aggregation in WSNs. The superfluous data are mislaid in data aggregation and it leads to minimize the communication cost. Which are further clues to find out the shortest multipath geographical based routing towards the sink node. [1] The routing principle that trusts on geographic position information is

nothing but a geographical routing. In 1980s, for routing by using position information idea are firstly proposed in the packet area networks. The own location is determined by the each node and the source is must be aware about the destination location is the requirement of a geographic routing [4].

How to give guarantee of the delivering the sense data even after interruption in communications and nodes failures are the main challenge in the routing algorithm. It is also become more critical when along with routing paths packets with aggregated data contains information from sources data aggregation is performed. If the packet is lost, a considerable amount of information also is lost. High aggregation rate, a reduced number of messages for setting up a routing tree, a reliable data transmission, and a reliable data transmission are the characteristics present in the data aggregation routing protocol, in the WSN context. We have also considered temporal relation while sending data packets towards the sink node.

2. Related Work

In the literature [1], [2] found a few approaches regarding the situation of Wireless Sensor Network, where data in-network routing mentions to the dissimilar habits that intermediate nodes forwarded data packets to the sink node.

2.1 Tree Structure Approaches

The hierarchical association of nodes in the network is found in the tree structure. The node election is depend on the tree structure aggregation point works and followed preferred direction. When two or more than two data packets reach at the same node of a tree at that time routing of data aggregation is performed. Here this node aggregates its own

data with all receivers' data and forwarded only one packet to its neighbors which is lower in the tree structure. If the packet is lost at a convinced level of a tree the data from the whole sub tree will also be lost as well due to the channel impairments. The traditional tree based protocol built the shortest path routing tree (SPT). The nodes reported its information with the help of shortest path to the sink node at the time of event detection [11], [9], [5].

The tree structure advantages are,

- Network use hierarchical association.
- Firstly create tree structure and then decided either respond to the query sent or route the gathered data by the sink node [13], [14].

The tree structure disadvantages are,

- Needs device for tolerance of fault to dependability forwarded data packets towards the sink node.
- Due to the channel impairments or technical problem, if the data lost at convinced level of the tree then whole data from the sub tree also be lost.

2.2 Clusters Structure based approaches

Here also nodes organized in hierarchical manner in the network in this approach. Were cluster are formed by dividing nodes partially. Here cluster head noting but a special node elected from the cluster which have high computing power and aggregated data and use to forward the result of such aggregation towards the sink node. Here the election of cluster head is done on the base of distance from the sink node. The nodes which is closer to the sink node elected as a cluster node. Gathering information from the remaining nodes and forwarding those gather data towards the sink node are the responsibilities of the cluster head [1], [6].

In the next section we proposed an algorithm which is used in the data aggregation with geographical base routing algorithm in the network. In this literature also found a Spatial-temporal correlation. Here this algorithm selects the cluster heads are selected on the basis of the spatial correlation of the nodes in wireless sensor network and the residual power of each node. Where, these cluster-head nodes broadcast their status to other nodes in the network. Here each node decided that which cluster it want to belong and joint that particular cluster. And after that the each cluster head aggregate the data acquire by the nodes and forwarded towards the base station.

Our simulation result clearly shows that our approach algorithm is clever to dispense energy indulgence evenly throughout the sensor nodes and prolong or increase the lifetime of the whole network effectively [6], [7], and [8].

3 System Architecture

Projecting a system architecture which is creating a geographical based multipath routing for in network aggregation in WSNs are our main goal. Our system architecture has different phases which are describe here.

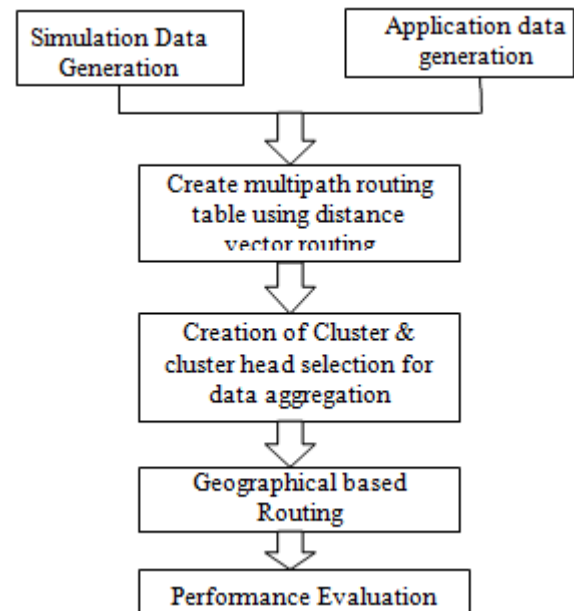


Figure 1: A geographical based multipath routing for in network aggregation in WSNs system architecture

3.1 Multipath Routing Table Creation

The multipath routes are created from the source node at the time of event detection, in the context of WSN. With the help of distance vector routing a multipath routing table is created. On the basis of geographical distances which recover the energy efficiency as packets portable over lesser distance, the routing path is selected. This provides the all possible path from the source node. Multipath routing gives guarantee that paths are trustworthy and in case if one path is failure then other path is always obtainable [15]. Once the paths are created the shortest path is chosen which the summation of all node distances for the given path. The distance between two node is calculated as a Euclidian distance.

It is the routing technique of using multiple alternative paths through a network, which can be yield a variety of benefits such as increased bandwidth, fault tolerance, or improved security.

3.2 Cluster Creation and Cluster Head Selection

The nodes which are closer to the sink node are selected as a cluster head in this approach. The cluster head which is nothing but a coordinator is elected on the basis of closest to the base station at the time of event detection through the one or more than one nodes. Otherwise the coordinator is elected that is closest to an already established path. Forwarding the data packets towards the sink node are responsibilities of a cluster head. It is also have a high computation power and residual energy. Here only one node is selected as coordinators that means leader and remaining nodes will be preserved as a collaborators. The coordinator gathers the information collected by the collaborators and sends them to the sink.

3.3 Geographical based routing

The method to transport a message to a node in a network is called as geometric routing. It is also called as location based

routing. Routing decision is based on multipath routing table created by distance vector routing. Cluster head aggregate the data and forward that data towards the sink node. It is used multiple paths which is created with the help of distance vector routing and as a Euclidean distance calculates the distance among the two nodes and also on the base of its distance the next nodes are selected that is the shortest distance node is selected [10]. Every path created using multipath routing are calculated by cluster head and from this selected path, cluster head select the path which have shortest path to the sink [11]. Based on the location of sensor nodes, the routing is performed. Using distance vector routing, it select the best route according to the selection of multipath routing table for every node n . Multipath routing which is based on geographical safeguards that paths are reliable and in case one path is failure then there is always present the another path and data is aggregated by the cluster head and forwarded that data to the sink.

3.4 Performance Evaluation

Based on the following factors our approach shows the algorithm performance

- Whole distance saved
- Dependable data aggregation
- Total aggregation
- Communication Cost
- Loss of aggregated data if any
- Total energy saved

1. Whole distance saved :

Forwarding a data packets completed the lesser distance to the sink node is the main propose of our paper. Based on the total aggregation the performance is evaluated.

2. Dependable Data Aggregation:

Failures of intermediate node in the network, channel impairments, failure of path in the network etc are the several potentials that the data packets may loss. Multipath routing give guarantee that paths are trustworthy and cluster head aggregate the data and if there is failed the one path at that time there is always present the another path.

3. Total Aaggregation:

Based on the total aggregation, performance is evaluated. There are chances of packet loss because of the channel impairments.

4. Communication Cost:

Extra the communication cost cause the climbable system, at the time of measuring the performance communication cost should be abridged.

5. Loss of Aggregated Data if any:

It is one of the most significant presentation events completed the network. It is nothing but an amount of data lost at the time of routing.

6. Total Energy Saved:

The saving the energy of sensor nodes is the result of data packets forwarded over the lesser distance.

3.5 Mathematical Model

Problem Definition:

Formation of geographic routing for in network aggregation in wireless sensor network.

Mathematical model project:

Let N be the total number of wireless sensor,

Let n_i be the single sensor node

Where $i = \{1, 2, \dots, N\}$

Let $P_i = \{p_1, p_2, p_3, p_4 \dots p_{mi}\}$ be the set m multiple paths for node n towards sink S .

Let (C_{l_i}, C_{a_i}) be the set of co-ordinates of node n .

Let (C_{l_s}, C_{a_s}) be the set of coordinates of sink, S .

We express our problematic as from any node n , to Sink S , aggregate the packets after any event and with the help of geographic routing find the shortest path to sink S .

3.6 Algorithm

Step1: With the help of distance vector routing, generate the multipath routing table for every node n .

Step2: Election of cluster head

The node which has highest outstanding energy will be elected as a cluster head and all remaining nodes in the cluster forwarded data towards the cluster head.

Step3: the multiple path which are generated in Step1 are taken by the cluster head to calculate the distance among two nodes using the equation

$$C(n_1, n_2) = \sqrt{(c_{l_1} - c_{l_2})^2 + (c_{a_1} - c_{a_2})^2}$$

Where,

$C(n_1, n_2)$ is the distance between two nodes. And

$$C(c_{l_1}, c_{a_1}) \& C(c_{l_1}, c_{a_2})$$

Are coordinates of node n_1, n_2 respectively.

The total distance for every path P_i is calculated by using the equation

$$C_{(n_i, s)} = \sum_{i=0}^k \sqrt{(c_{l_i} - c_{l_{i+1}})^2 + (c_{a_i} - c_{a_{i+1}})^2}$$

Where, K is the total number of nodes in path p_i .

Step4: After that the path which have shortest distance to the sink, is selected by the cluster head.

4 Implementation Details

The proposed application is implemented in the following environment

4.1.1 Modules

- **Simulation Set:** The application is implemented with the help of java language. Jung libraries are used for the

network topology. For generating the sensor nodes and networks the Jung libraries are used.

- **Network:** In the proposed, we built a network system where nodes are organized in a hierarchical structure used for implementation and simulation. These nodes are dynamically loaded.

There are mainly modules of the proposed system. The introductions of these four modules are as follows:

1) Build Graph:

Where nodes are organized as hierarchical organization in the network. These nodes are dynamically loaded. The nodes are created by using the Jung libraries. These nodes send the data from source to destination.

2) Get Multiple Path:

Here, with the help of geographical routing, the shortest path is found which is used by a cluster head to transfer the data to the sink node. The multiple paths are created from source node to the sink node, based on the Euclidean distance between nodes. The shortest path is selected which is having lesser distance to the sink node.

3) Clustering:

Here, cluster formation process is done, where each node determined that in which cluster it has to join and joined the cluster. Here also the node which has highest residual energy and closer to the sink node is elected as a cluster head. It also calculates the distance between two nodes. The remaining node which is called as a collaborator forwards its data to the cluster head and the cluster head aggregates this data with its own data.

4) Send Data:

Here, the cluster head selects the shortest path from the set of paths generated by the multipath routing table and sends the data to the sink node from the selected shortest path.

4.1.2 Hardware Requirement

- Hard disk : 80 GB
- RAM : 512 MB
- Processor : Intel Pentium4 or above

4.1.3 Software Requirements

A. JAVA

The technology used for designing and implementation of this project is Java as a coding language. We use the Vector class for implementing the algorithm. The Vector class implements a growable array of objects. Like an array, it contains components that can be accessed using an integer index. However, the size of a Vector can grow or shrink as needed to accommodate adding and removing items after the Vector has been created. Each vector tries to optimize storage management by maintaining a capacity and a capacity increment. The capacity is always at least as large as the vector size; it is usually larger because as components are added to the vector, the vector's storage increases in chunks the size of capacity increment. An application can increase the capacity of a vector before inserting a large number of components; this reduces the amount of incremental reallocation. For the GUI designing uses the swing class. For designing frames used JLabel, JTextFeildInputFile, JButtonBrows, JScrollPane, JButton object are used.

As for implementation of the coding we use Java, and we know that Java is a platform independent language. Platform independent means the software or the program or the application we can run on any operating system without making any changes. For the security purpose many medical firms use Linux for the security from the viruses hence this application can be run on any platform without making any changes. Only Java is installed in the system, with NetBeans.

JDK 1.7

Here we use 1.7 version of JDK. The Java Development Kit is used for developing the Java applications and applets. It is one of the software development environments. It contains jar, compiler, Java runtime environment, interpreter, loader, documentation generator and other tools which are required for Java development.

B. NetBeans IDE

NetBeans IDE are installed for implementing the Java code. NetBeans is an integrated development environment (IDE) for developing primarily with Java, but also with other languages, in particular PHP, C/C++, and HTML5. It is also an application platform framework for Java desktop applications and others. The NetBeans IDE is written in Java and can run on Windows, OS X, Linux, Solaris and other platforms supporting a compatible JVM.

C. Jung Tool and Library for Forming Networks on the Frame.

Java Universal Network/Graph Framework is a software library, which is used for visualization, analysis of the data which is represented as a graph or network. It is written in Java. It is used to design directed or undirected graph, graph with parallel edges, multi-model graph etc. It also implements number of algorithms of graph theory, data mining, social network analysis such as optimization, decomposition, random graph generation, flows, etc. It is designed for to support the variety of representations of entities and their relations. It also provides a visualization framework that makes it easy to construct the tools for the interactive exploration of network data. It is an open-source library; JUNG provides a common framework for graph/network analysis and visualization.

4.1.4 Network Model

In the proposed network model, here we form a tree network model in which contains root node which is also called as parent node and next is child node. The end nodes also called as leaf nodes. In tree network model contains different levels like level 1; level 2, etc depend on network model. In network may contain nodes which are denoted as a router, hubs, switches etc in the network. It also contains edges which are represented as a link in a network model. This network model is dynamically loaded and also we assign a weight to each edge.

4.1.5 Simulation

After building tree, we enter a sink node. After that we get a shortest path which is generated by the multipath routing table. And it is used by the cluster head to forward the data towards the sink. Next, we enter the name of the cluster node. After entering the cluster node the cluster will be formed. In which contains cluster head which is elected on the

basis of highest residual energy and which is closer to the sink node. And remaining nodes which are also called as cluster members. The cluster member forwarded there data to the cluster head and cluster head aggregates this data with own data and after that it calculate the distance between two nodes. The cluster head select the shortest path which is generated by the multipath router and send this aggregate data to the sink. This algorithm shows that this will be help in fast construction, effective energy and dependable WSN applications. And also shows that our approach solution gives outperformance in different situations and in different key characteristics needed by WSNs.

5 Result

Shortest path of node verses distance: Here, we show the result graph which gives shortest path of node from sink is calculated. For example Node 6 (N-6) having shortest path whose distance is 289 meters. Node 2 (N-2) is having shortest path whose shortest distance is 130 meters. Here euclidian distance is calculated between the nodes and finally multiple paths are created.

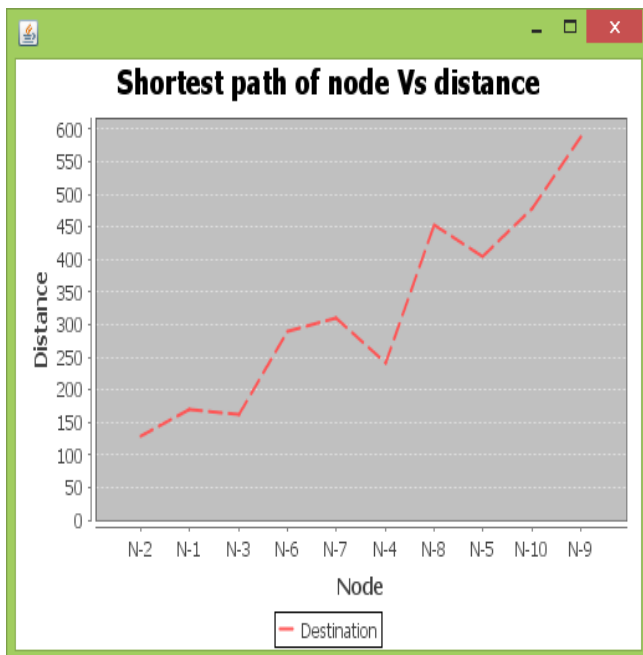


Figure 2: Shortest Path of node vs Distance

Comparative Graph for Shortest path of node Vs distance

Here comparison is made between Cluster based approach by considering number of hops required and second approach is cluster based approach considering distance between two nodes.


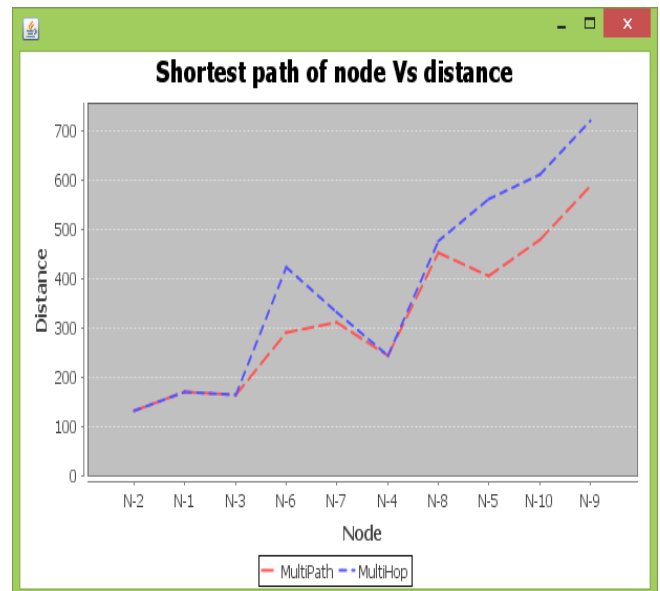


Figure 3: Comparative Graph for Shortest path of node Vs distance

Shortest path for Cluster based approach with hop based routing in fig. 3 shows with the blue dotted line
 Shortest path from sink to 1 is [1, 0] distance=169
 Shortest path from sink to 8 is [8, 7, 1, 0] distance=474
 Shortest path from sink to 5 is [5, 6, 1, 0] distance=559
 Shortest path from sink to 6 is [6, 1, 0] distance=421
 Shortest path from sink to 3 is [3, 0] distance=162
 Shortest path from sink to 2 is [2, 0] distance=130
 Shortest path from sink to 9 is [9, 10, 6, 1, 0] distance=720
 Shortest path from sink to 4 is [4, 3, 0] distance=242
 Shortest path from sink to 10 is [10, 6, 1, 0] distance=611
 Shortest path from sink to 7 is [7, 1, 0] distance=332
 Shortest Path for Cluster based approach with distance based routing: shows with the red dotted line from fig. 3

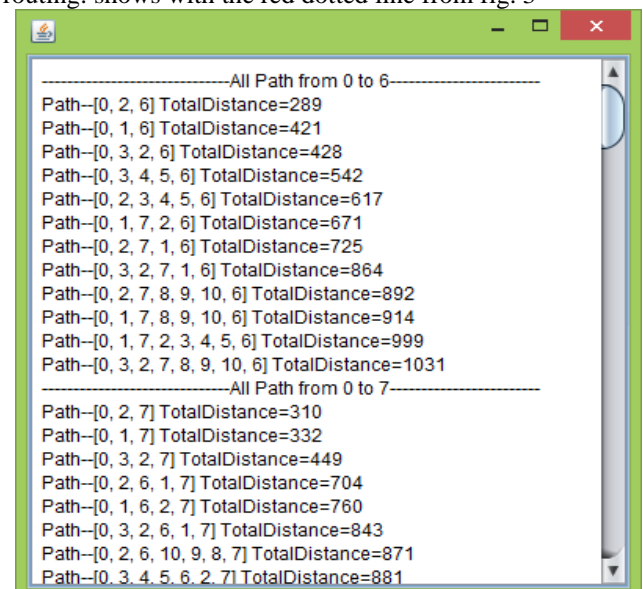

Here in the comparison graph we can see that Hop based routing requires more distance as compare to distance based routing. Node 1, Node 2, Node 3 and Node 4 requires same distance in both the cases whereas Node 5 requires 559 meters distance from sink in cluster based approach with hop based routing, in cluster based approach with

distance based routing node 5 requires 404 meters distance, Node 6 requires (421 and 289) meters distance, Node 7 requires (332, 310) meters distance, Node 8 requires (474, 452) meters distance, Node 9 requires (720, 588) meters distance and Node 10 requires (611, 479) meters distance respective cases with hop based and distance based routing. Which shows distance based routing is more efficient for routing packet as data packets are travel over lesser distance as compared with the hop based routing.

Comparison with the Similar System

Sr. No.	Existing System	Proposed System
1.	Cluster based approach without considering distance between nodes.	Cluster based approach with consideration of geographical location.
2.	Energy Consumption is comparatively high.	Energy Consumption is low.
3.	Hop based routing	Distance based routing
4.	Total distance is maximum	Total distance is minimum
5.	Total time required is More	Total time required is less

Comparative Graph of Node Vs Time: Here in fig. 4 which shows comparison for time required for sending data packets in both cases (Cluster based approach with Hop based routing and Cluster based approach with distance based routing).

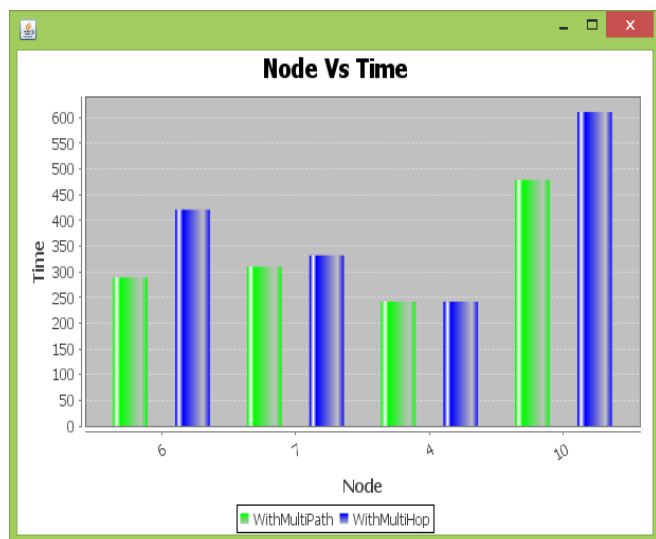


Figure 4: Comparative graph of Node vs. Time

i.e. Node 6 Requires (421 milliseconds shows with blue line) in tree based approach considering no. of hops & (289 milliseconds shows with the green line) in cluster based approach with distance based routing. Node 7 requires (332 & 310) milliseconds, Node 4 requires (242 & 242) milliseconds and Node 10 requires (611 & 479) milliseconds in both the cases, the result with graph shows that time required for sending data packet is less in cluster based approach with distance based routing.

6 Conclusion

In this paper, we have monitored the multipath routing which is based on the geographical distances, this helps in routing packets via shortest distance towards the sink node which results in saving of nodes energy. Moreover multipath

routing helps in finding reliable and shortest path from a given set of paths. It is also used to verdict the trustworthy path from the present set of path. We have also compared it with the existing system. The contribution of the work is to design system architecture. We have also analyzed Time required for sending data packet from every node towards the sink. We believe that this will help in achieving fast, energy efficient, dependable and reliable WSN applications.

7 Acknowledgement

This work is supported by TSSMs Bhivarabai Sawant College of Engineering & Research. I extend my sincere thanks to Prof. A.D. Gujar, for providing me with the guidance and facilities for the presentation of paper. He has always been a guiding force behind me. I express my sincere gratitude to our M.E. coordinator Prof. R.H. Kulkarni; I also wish to express my sincere gratitude to Dr. S.M. Chaware HOD of the Computer Engineering Department for providing all the necessary facilities to carry out the work. Through the course of my studies, I have been fortunate to enjoy unwavering support and encouragement of my parents and friends to them I owe a debt of gratitude that can scarcely be contained in this acknowledgement. Last but not the least, many thanks and deep regards to Principal Dr. D.V.Jadhav for their support and encouragement.

References

- [1] I.a. villas, a. boukerche, h.a. de oliveira, r.b. de araujo, and A.A. loureiro, "a spatial correlation aware algorithm to perform efficient data collection in wireless sensor networks "Ad hoc networks" <http://www.sciencedirect.com/science/article/2011>.
- [2] Leandro aparecido villas, azzedine boukerche, horacio a.b. fernandes de oliveira, "Drina: a lightweight and reliable routing approach for in-network aggregation in wireless sensor networks IEEE transaction on computers, vol 62, no. 4, April 2013
- [3] Energy- Efficient Routing Protocols in Wireless Sensor Networks: A Survey Pantazis, N.A. ; Nikolidakis, S.A. ; Vergados, D.D. Communications Surveys & Tutorials, IEEE Publication Year: 2013
- [4] Lidong zhai; zhilei wang; yujia zhu; daiyong quan "a spatial correlation-based wireless routing algorithm" control and decision conference (ccdc), 2013 25th Chinese
- [5] A comparative analysis of routing techniques for wireless sensor networks. Raghunandan, g.h.; lakshmi, b.n. innovations in emerging technology (ncoiet), 2011 national conference on 2012.
- [6] A cluster based Energy Efficient Reliable Routing Protocol for Wireless Sensor Networks. Mathapati, Basavaraj S. ; Patil, Siddarama. R. ; Mytri, V. D. Emerging Technology Trends in Electronics, Communication and Networking (ET2ECN), 2012 1st International Conference on Digital Object Identifier: 10.1109/ET2ECN.2012.6470116 Publication Year: 2012
- [7] I.a. villas, a. boukerche, r.b. araujo, and A.A. loureiro, "A reliable and data aggregation aware routing protocol

- for wireless sensor networks,” proc. 12th acm int’l conf. modeling, analysis and simulation
- [8] Genetic algorithm based mobility aware clustering for energy efficient routing in wireless sensor networks. Sarangi, S. Kar, S. Networks (ICON), 2012 17th IEEE International Conference
- [9] A. boukerche, B. turgut, n. aydin, m.z. Ahmad, l. bo’lo’ni, and d. turgut, survey paper: routing protocols in ad hoc networks: a survey,” computer networks, vol. 55, pp. <http://dx.doi.org/10.1016/j.comnet.2011.05.010>, sept. 2012.
- [10] Shortest path based geographical routing algorithm in wireless sensor network banerjee, i. ; roy, i. ; choudhury, a.r. ; sharma, b.d. ; samanta, t. communications, devices and intelligent systems (CODIS), international conference Publication Year: 2012
- [11] A survey on energy efficient routing techniques in wireless sensor networks. Rahman, M.A. ; Anwar, S. ; Pramanik, M.I. ; Rahman, M.F. Advanced Communication Technology (ICACT), 2013 15th International Conference on 2013.
- [12] Congestion-Aware Spatial Routing in Hybrid High-Mobility Wireless Multihop Networks Gohari, A.A.; Rodoplu, V. Qualcomm Inc., San Diego, CA, USA Mobile Computing, IEEE Transactions on Nov. 2013
- [13] *Efficient Secure In-Network Data Aggregation in Wireless Sensor Networks Hailin Feng ; Guanghui Li ; Guoying Wang Publication Year: 2011.*
- [14] Tree-Adapting: An Adaptive Data Aggregation Method for Wireless Sensor Networks Jun-hu Zhang ; Hui Peng ; Wireless Communications Networking and Mobile Computing (WiCOM), 2010 6th International Conference on Publication 2011.
- [15] Parameswari, K. ; Raseen, M.M. Current Trends in Engineering and Technology (ICCTET), 2013 International Conference on Aggregating secure data in wireless sensor networks Digital Object Identifier: 10.1109/ICCTET.2013.6675991 Publication Year: 2013
- [16] Data merge: A data aggregation technique for wireless sensor networks Tsitsipis, D. ; Dima, S. ; Kritikakou, Angeliki ; Panagiotou, C. ; Koubias, S. Emerging Technologies & Factory Automation (ETFA), 2011 IEEE 16th Conference on Digital Object Identifier: 10.1109/ETFA.2011.605917 Publication Year: 2011.

Author Profile



Nilesh P. Nivalkar received B.Tech (Computer Science & Engg) from S.G.G.S.IE&T Nanded. Pursuing M.E. Computer from TSSM's B.S.C.O.E & R Narhe, Pune, India.



Anil D. Gujar is working as an assistant Professor at TSSM's B.S.C.O.E. & R, Narhe, Pune, India. Received M.Tech (IT) from Bharati Vidhyapeeth, Pune, India