

Capacity Evaluation of ISKON Intersection on S.G Highway in Ahmedabad-A Case Study

Alpana Jha

Lecturer (Civil Engineering), Government Polytechnic, Ahmedabad, Gujarat

Abstract: Space sharing intersection e.g rotaries and pretimed signals are widely used to control the intersections. Space sharing intersection are intended to give equal priority and permit continuous movement of all intersecting vehicle flows. For higher traffic volumes, space sharing intersections such as rotary is not preferable due to increase in congestion and overall intersection delay and conflicts. In pretimed signal, green times for the phases remain constant for the particular period of the day, although demand fluctuates during that period. This problem can be eliminated by providing over bridge at rotary intersection. This study presents literature review on Rotary Intersection and capacity and level of service and literature on case study. ISKON Cross Road on S.G Highway in Ahmedabad was selected as a case study intersection. The flow rate, saturation flow rate and its adjustment factors, capacity, volume to capacity ratio, delay for lane group, approaches and intersection as whole and delay comparison with level of service were calculated as described in highway Capacity Manual 2000. Study proves that ISKON Cross Road at-grade intersection was required to be converted to grade separated intersection to reduce congestion and delay.

Keywords: Rotary intersection, Capacity, Level of service, delay, Critical v/c ratio

1. Introduction

Rotary intersections or roundabouts are special form of at-grade intersections laid out for the movement of traffic in one direction around a central traffic island. Essentially all the major conflicts at an intersection namely the collision between through and right-turn movements are converted into milder conflicts namely merging diverging. The vehicles entering the rotary are gently forced to move in a clockwise direction in orderly fashion. They then weave out of the rotary to the desired direction.

Advantages and Disadvantages of Rotary

The key advantages of a rotary intersection are listed below:

- 1) Traffic flow is regulated to only one direction of movement, thus eliminating severe conflicts between crossing movements.
- 2) All the vehicles entering the rotary are gently forced to reduce the speed and continue to move at slower speed. Thus, none of the vehicles need to be stopped, unlike in a signalized intersection.
- 3) Because of lower speed of negotiation and elimination of severe conflicts, accidents and their severity are much less in rotaries.
- 4) Rotaries are self governing and do not need practically any control by police or traffic signals.
- 5) They are ideally suited for moderate traffic, especially with irregular geometry, or intersections with more than three or four approaches

Although rotaries offer some distinct advantages, there are few specific limitations for rotaries which are listed below.

- 1) All the vehicles are forced to slow down and negotiate the intersection. Therefore, the cumulative delay will be much higher than channelized intersection.
- 2) Even when there is relatively low traffic, the vehicles are forced to reduce their speed.
- 3) Rotaries require large area of relatively flat land making them costly at urban areas.

- 4) The vehicles do not usually stop at a rotary. They accelerate and exit the rotary at relatively high speed. Therefore, they are not suitable when there is high pedestrian movements.

Guidelines For The Selection Of Rotaries

Because of the above limitation, rotaries are not suitable for every location. There are few guidelines that help in deciding the suitability of a rotary. They are listed below.

- 1) Rotaries are suitable when the traffic entering from all the four approaches are relatively equal.
- 2) A total volume of about 3000 vehicles per hour can be considered as the upper limiting case and a volume of 500 vehicles per hour is the lower limit.
- 3) A rotary is very beneficial when the proportion of the right-turn traffic is very high; typically if it is more than 30 percent.
- 4) Rotaries are suitable when there are more than four approaches or if there is no separate lanes available for right-turn traffic. Rotaries are ideally suited if the intersection geometry is complex. As noted earlier, the traffic operations at a rotary are three; diverging, merging and weaving. All the other conflicts are converted into these three less severe conflicts.
 - a) **Diverging:** It is a traffic operation when the vehicles moving in one direction is separated into different streams according to their destinations.
 - b) **Merging:** Merging is the opposite of diverging. Merging is referred to as the process of joining the traffic coming from different approaches and going to a common destination into a single stream.
 - c) **Weaving:** Weaving is the combined movement of both merging and diverging movements in the same direction.

These movements are shown in figure 1

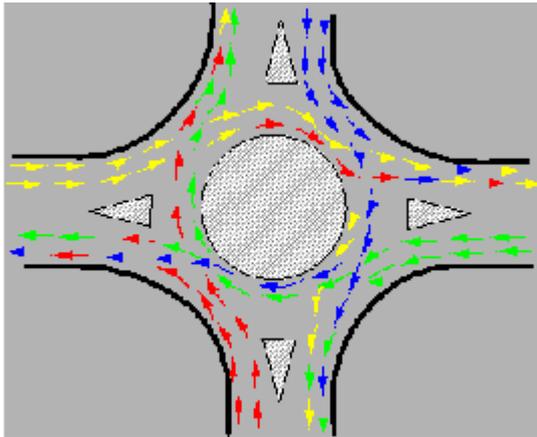


Figure 1: Traffic operations in a rotary

2. Capacity and Level-of-Service Concepts

The HCM 2000 presents methods for analyzing capacity and level of service for a broad transportation facilities. It provides procedures for analyzing streets and highways, bus and on-street light rail transit, and pedestrians and bicycle paths.

Facilities are classified into two categories of flow: uninterrupted and interrupted. Uninterrupted-flow- facilities have no fixed elements, such as traffic signals. Traffic flow conditions result from the interactions among vehicles in the traffic stream and between vehicles and geometric and environmental characteristics of the roadway. Interrupted-flow facilities have controlled and uncontrolled access points that can interrupted the traffic flow. These access points including traffic signals, stop signs, yield signs, and of control that stop traffic periodically (or slow it significantly), irrespective of amount of traffic.

Uninterrupted and interrupted flows describe the type of facilities, not the quality the traffic flow at any given time. A freeway experiencing extreme congestion, for example, is still an Uninterrupted- flow facility because the causes of congestion are internal.

The analysis of interrupted-flow facilities must account for the impact of fixed interruptions. A traffic signal, for example, limits the time available to various movements in an intersection. Capacity is limited not only by the physical space but by the time available for movements. Transit, pedestrian, and bicycle flows generally are considered to be interrupted, Uninterrupted flow might be possible under certain circumstances, such as in a long bus way without stops or along a pedestrian corridor. However, in most situations, capacity is limited by stops along the facility.

3. Case Study- ISKON Intersection

ISKON Intersection was a rotary intersection with following geometric details:

Table 1: Geometric details for Case study Intersection

Name of intersection: ISKON Intersection					
Approach	Lane Group	No. of lanes Per lane Group	Width per lane (m)	Approach Width (m)	Approach Grade (%)
North	Left turn	1	3	28	0
	Through	2	3		
	Right turn	1	3		
South	Left turn	1	3	28	0
	Through	2	3		
	Right turn	1	3		
East	Left turn	1	3	26	0
	Through	2	3		
	Right turn	1	3		
West	Left turn	1	2.5	18	0
	Through	1	2.5		
	Right turn	1	2.5		

Approach width = one direction lane group width + median width + another direction flow lane group width
 Approach width (North) = 12+ 4 + 12 = 28
 Approach width (South) = 12+ 4 + 12 = 28
 Approach width (East) = 12 + 2 + 12 = 26
 Approach width (West) = 7.5 + 3 + 7.5 = 18

Comparison between Capacity and Present Traffic Volume

Table 2 shows the comparison between capacity and present traffic volume of ISKON intersection. It indicates that ISKON intersection capacity is 3138veh/h while the present traffic volume at ISKON intersection is 6107veh/h. It means the present traffic is 94% more than capacity of ISKON intersection.

Table 2: Comparison Between Capacity And Present Traffic Volume

Approach	Capacity veh/h	Present Traffic Volume veh/h
North	873	1770
South	753	1423
East	900	1495
West	612	1419
Intersection Total	3138	6107

(source: Traffic Survey)

Comparison between Volume to Capacity Ratio and Flow Condition for Lane Groups

There are three different conditions for measuring flow condition These are:

- 1) When v/c ratio less than one, flow condition is under saturated
- 2) When v/c ratio equal to one, flow condition is saturated
- 3) When v/c ratio more than one, flow condition is over saturated

Table 3 shows the comparison between v/c ratio and flow condition for lane groups. It indicates that in all approach left turn lane group flow condition is under saturated, because it carried. Continuous traffic movement. Remaining lane group for all approach flow condition is over saturated.

Table 3: Comparison Between v/c Ratio And Flow Condition for Lane Groups

S.No	Approach	Lane Group	v/c Ratio	Flow condition
1	North	Left turn	0.60	Under saturated flow
2		Through	3.8	Over saturated flow
3		Right turn	1.68	Over saturated flow
4	South	Left turn	0.56	Under saturated flow
5		Through	3.96	Over saturated flow
6		Right turn	1.14	Over saturated flow
7	East	Left turn	0.61	Under saturated flow
8		Through	3.05	Over saturated flow
9		Right turn	1.32	Over saturated flow
10	West	Left turn	0.71	Under saturated flow
11		Through	4.85	Over saturated flow
12		Right turn	1.39	Over saturated flow

Comparison between Critical Volume to Capacity Ratio for Intersection and Flow Condition

There are three different conditions for measuring critical flow condition. These are

- 1) When critical v/c ratio for intersection less than one, flow condition is under saturated
- 2) When critical v/c ratio for intersection equal to one, flow condition is saturated
- 3) When critical v/c ratio for intersection more than one, flow condition is over saturated

There are four lane groups which behave as a critical lane group. They are:

1. North approach through lane group
2. South approach through lane group
3. East approach through lane group
4. West approach through lane group

Table 4 shows the comparison between critical v/c ratio for intersection and flow condition. It indicates critical v/c ratio for ISKON intersection is 4.85 which is more than one
 • So, flow condition for ISKON intersection is over saturated.

Table 4: Comparison between critical v/c Ratio for Intersection and Flow Condition

S. No	Approach	Lane Group	Critical v/c Ratio for Intersection	Intersection Flow Condition
1	North	Through	3.8	Over saturated Flow
2	South	Through	3.96	
3	East	Through	3.05	
4	West	Through	4.85	

Comparison between Delay and Level of Service

Table 5: Comparison between Delay And Level Of Service

S. No.	Approach	Lane Group	Lane Group Delay s/veh	Lane Group Level of Service
1	North	Left turn	29	C
2		Through	86.9	F
3		Right turn	86.9	F
4	South	Left turn	35	D
5		Through	94.6	F
6		Right turn	94.6	F
7	East	Left turn	23.2	C
8		Through	85.4	F
9		Right turn	85.4	F
10	West	Left turn	33	D
11		Through	106.5	F
12		Right turn	106.5	F

Comparison between Delay and LOS for Approach And Intersection

Approach	Approach Delay	Approach LOS	Intersection Delay	Intersection LOS
North	67.7	F	72.3	F
South	74.73	F		
East	64.66	F		
West	82.1	F		

4. Conclusion

The capacity of ISKON intersection is less than present traffic demand as described in section 2. So it may be needed to improve present signalized condition or present geometric condition. Here v/c ratio for through and right turn traffic movements for all approach of ISKON intersection are over saturated . It indicates of actual or potential breakdown. Critical v/c ratio at ISKON intersection is greater than one. This indicates that the signal and geometric design cannot accommodate the combination of critical flows at the intersection. This condition may be ameliorated by increased cycle length, changes in the phasing plan, and basic changes in geometrics. Further, here all left turns and right turns are protected phases and v/c ratios are unacceptable, it is probable that geometric changes will be required to ameliorate the condition. Also there are comparison between delay and level of service . It indicates that ISKON intersection approach delay and intersection delay is very high and it place in LOS F.

References

- [1] Saxena C, *A Course in Traffic Planning and Design Second Edition* , Dhanpat Rai Publication.
- [2] Kadiyali L.R., *Traffic Engineering and Transport Planning sixth reprint 2004*, Khanna Publishers.
- [3] Khanna S. K., Justo C.E.G., *Highway engineering Eighth edition*, New Chand and Bros, Roorkee.
- [4] *Highway Capacity Manual 2000* by Transportation Research Board, National Research council, Washington D.C
- [5] Dissertation on “ *Capacity analysis of signalized Intersection in Devloping Countries*” 2002 by Gopal R. Patil.