

Optimization of Fiber Reinforced High Strength Concrete

Valluri Lakshmi Narendra¹, K. S. Praveen²

Civil Engineering Department, Construction Engineering and Management, SRM University, Chennai, India

Abstract: *The study on the optimization of fiber reinforced high strength concrete (FRHSC) gives us the result of optimized strength by adding different percentage (%) of fibers in M70 grade concrete mix. The reason for less use of FRHSC is its high cost of fibers and it also employs higher cement content which results in increasing water absorption capacity of the concrete mix. In this study, material properties of an FRHSC containing sisal, nylon, polypropylene fibers are determined which include compressive strength, split tensile strength and flexural strength. These fibers are relatively cheaper and mostly used fibers in concrete which are recently investigated by a few researchers. In this experimental work, there is no replacement of any material. In this study, influence of addition of 0.5%, 1%, 1.5%, 2%, 2.5%, 3%, 3.5% and 4% fibers in different volume fraction in M70 grade HSC is investigated. Experimental results showed that the optimization of high strength concrete by addition of fibers up to 2.5% (polypropylene), 3% (sisal), and 4% (nylon) of fibers together with mineral admixtures is optimized and improved the compressive strength, split tensile strength and flexural strength below the optimized percentage. The improvement in the strain corresponding to maximum compressive strength, split tensile strength and flexural strength results was observed at all fibers up to optimized percentage (%) level*

Keywords: high strength concrete, fiber reinforced high strength concrete, silica fume, compressive strength, split tensile strength, flexural strength.

1. Introduction

High-strength concrete columns can hold more weight and therefore be made slimmer than regular strength concrete columns, which allows for more useable space, especially in the lower floors of buildings. High-strength concrete is specified where reduced weight is important or where architectural considerations call for small support elements. By carrying loads more efficiently than normal-strength concrete, high-strength concrete also reduces the total amount of material placed and lower the overall cost of the structure.

A high-strength concrete is always a high-performance concrete, but a high performance concrete is not always a high-strength concrete. ACI defines a high-strength concrete as concrete that has a specified compressive strength for design of 6,000 psi (415MPa) or greater. Other countries also specify a maximum compressive strength, whereas the ACI definition is open-ended.

Fiber reinforced concrete (FRC) is concrete containing fibrous material which increases its structural integrity. It contains short discrete fibers that are uniformly distributed and randomly oriented. Fibers include steel fibers, glass fibers, synthetic fibers and natural fibers. Within these different fibers that character of fiber reinforced concrete changes with varying concretes, fiber materials, geometries, distribution, orientation and densities.

Some recent research indicated that using fibres in concrete has limited effect on the impact resistance of concrete materials. This finding is very important since traditionally people think the ductility increases when concrete reinforced with fibres. The results also pointed out that the micro fibres is better in impact resistance compared with the longer fibres and In this study, the dynamic behavior of fiber reinforced high strength concrete is investigated, which showed good results. Therefore, use of FRHSC is one of the good substitutes of conventional synthetic fibers.

Certainly, to investigate the influence of several engineering materials parameters on performance HSC, it is essential to have sufficient knowledge about material properties including compressive strength, split tensile strength, flexural strength. The HSC mix was prepared by adding 10% silica fume, 10% fly ash and super plasticizer to attain good strength of the concrete.

Some recent research indicated that using fibres in concrete has limited effect on the impact resistance of concrete materials. This finding is very important since traditionally people think the ductility increases when concrete reinforced with fibres. The results also pointed out that the micro fibres is better in impact resistance compared with the longer fibres.

2. Experimental Program

Experimental program include selection of material for the preparation of high strength concrete (with and without fibers), specimen size and their preparation and specimen testing setup, for determining the mechanical properties, in afterword section.

2.1 Batching and Mixing of FRHSC

The proportioning of the quantity of cement, cementitious material like Flyash, fine aggregate and coarse aggregate has been done by weight as per the mix design. Water, super plasticizer were measured by volume. All the measuring equipments are maintained in a clean serviceable condition with their accuracy periodically checked. The mixing process is carried out in electrically operated concrete mixer. The materials are laid in uniform layers, one on the other in the order - coarse aggregate, fine aggregate and cementitious material. Dry mixing is done to obtain a uniform color. The fly ash is thoroughly blended with cement before mixing. Self Compacting characteristics of fresh concrete are carried out immediately after mixing of concrete using EFNARC specifications].

The workability properties of Normal Concrete (NC) Viz., slump was maintained in the range of 75 – 100 mm and compaction factor was 0.9. In higher strength concretes, these are maintained by adjusting the mineral and chemical admixtures.

2.2 Curing of Test Specimens

After 24 hours of casting, the specimens were removed from the moulds and immediately dipped in clean fresh water. The specimens were cured for 3 days, 7 days and 28 days respectively depending on the requirement of age of curing. The fresh water tanks used for the curing of the specimens were emptied and cleaned once in every fifteen days and were filled once again. All the specimens under immersion were always kept well under water and it was seen that at least about 15 cm of water was above the top of the specimens.

2.3 Mix Proportions for HSC

The mix proportion of M70 grade of concrete designed on the basis of Nan Su method for different maximum sizes of aggregates 12.5mm . For the mix proportions obtained, highlights the details of various parameters including total aggregate – cement ratio (A/C), water – cement ratio (w/c), coarse aggregate - fine aggregate ratio (CA/FA) and fine aggregate – total aggregate ratio (S/a) for various aggregate sizes

Table 1: Parameters of M70 grade HSC mix proportions

Mix Trail No	A/C	w/c	w/p	CA/FA	S/a
1	2.42	0.38	0.269	0.935	0.520
2	2.43	0.366	0.257	0.914	0.514



Figure 1: Mixing of concrete



Figure 2: Demoulding of concrete

3. Experimental Results

3.1 Compressive Strength

The results of the mechanical properties obtained based on the specimens tested as per Indian standard test procedures (as per IS: 516) are discussed. M 70 are the variables of investigation. The details of the compressive strengths of M70 grade are shown in Table 2



Figure 3: Testing of specimen

Table 2: compressive strength of FRHSC:(sisal fibers)

% of Fibers Added	3 Days Strength, N/mm ²	7 Days Strength, N/mm ²	28 Days Strength, N/mm ²
0.5%	44	58.3	78
1%	47	66.3	85.4
1.5%	52.1	69.8	92.4
2%	54.2	72.1	95.8
2.5%	57.6	76.7	98.3
3%	39.12	47	65.32

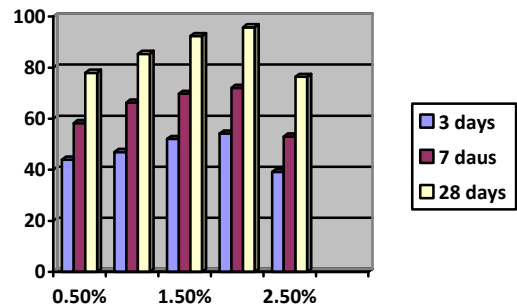


Figure 4: Compressive Strength Graph(Sisal Fiber)

Table 3: Compressive strength of FRHSC:(nylon fiber)

% of Fibers Added	3 Days Strength, N/mm ²	7 Days Strength, N/mm ²	28 Days Strength, N/mm ²
0.5%	42.3	56	73

1%	44.7	59	78
1.5%	50.3	64	84.6
2%	52.4	68.5	86
2.5%	55	72	89
3%	57.2	75.8	91
3.5%	36.34	49.17	74.56

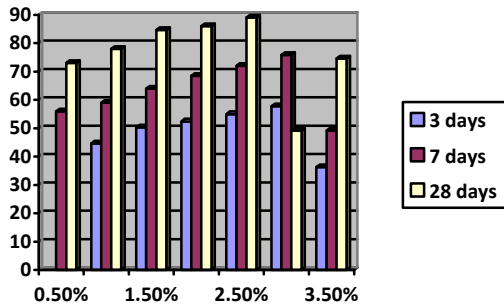


Figure 4: Compressive strength graph (nylon fiber)

Table 4: Compressive strength of FRHSC: (polypropylene fiber)

% of Fibers Added	3 Days Strength, N/mm ²	7 Days Strength, N/mm ²	28 Days Strength, N/mm ²
0.5%	45	62.5	81
1%	49.2	72	88.3
1.5%	57.3	79.3	93.7
2%	65	82	96.78
2.5%	41.58	54.72	79
0.5%	45	62.5	81
1%	49.2	72	88.3

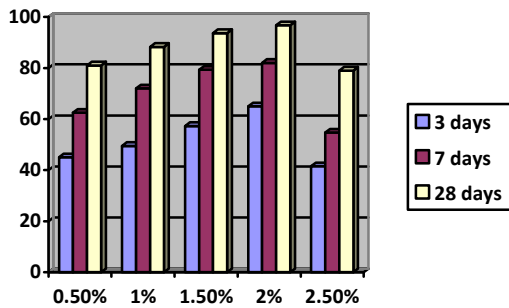


Figure 5: Compressive strength graph (polypropylene fiber)

3.2 Split Tensile Strength

The results of the mechanical properties obtained based on the specimens tested as per Indian standard test procedures (as per IS: 516) are discussed. M 70 are the variables of investigation. The details of the split tensile strengths of M70 grade are shown in Table 3



Figure 6: Testing of specimen

Table 5: split tensile strength of FRHSC: (sisal fiber)

% of Fibers Added	3 Days Strength, N/mm ²	7 Days Strength, N/mm ²	28 Days Strength, N/mm ²
0.5%	3.771	6.759	9.96
1%	4.052	7.638	10.759
1.5%	4.94	8.538	11.554
2%	5.38	8.89	11.93
2.5%	5.62	9.32	12.34
3%	3.43	6.4	9.18
0.5%	3.771	6.759	9.96

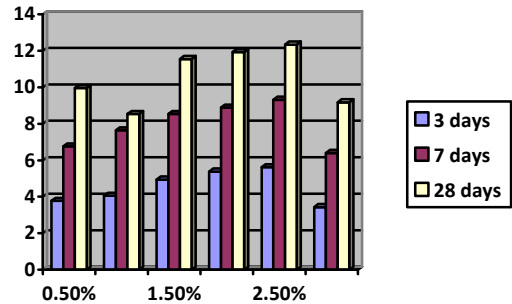


Figure 7: Split tensile strength graph (sisal fiber)

Table 6: Split Tensile Strength of FRHSC: (nylon fiber)

% of Fibers Added	3 Days Strength, N/mm ²	7 Days Strength, N/mm ²	28 Days Strength, N/mm ²
0.5%	3.23	6.26	9.49
1%	3.921	7.516	10.249
1.5%	4.320	7.528	10.480
2%	4.73	7.77	10.73
2.5%	4.96	7.83	11.18
3%	5.31	8.29	11.94
3.5%	3.08	6.12	8.95

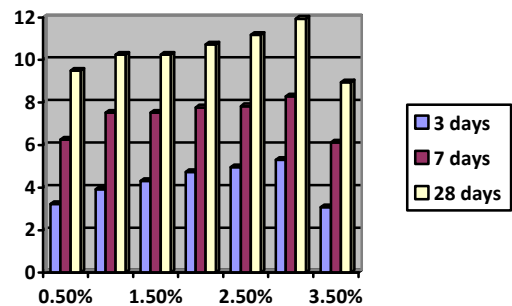


Figure 8: Split tensile strength graph (nylon fiber)

Table 7: Split Tensile Strength of FRHSC:(polypropylene)

% of Fibers Added	3 Days Strength, N/mm ²	7 Days Strength, N/mm ²	28 Days Strength, N/mm ²
0.5%	3.579	6.328	9.20
1%	4.374	7.450	10.804
1.5%	5.165	8.266	11.692
2%	5.72	8.54	12.14
2.5%	3.63	6.412	9.51

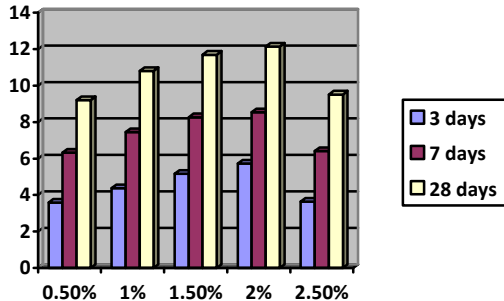


Figure 9: Split tensile strength (polypropylene)

3.3 Flexural Strength

The results of the mechanical properties obtained based on the specimens tested as per Indian standard test procedures (as per IS: 516) are discussed. M 70 are the variables of investigation. The details of the split tensile strengths of M70 grade are shown in Table 4



Figure 10: Testing of specimen

Table 8: Flexural strength of FRHSC(sisal fiber)

% of Fibers Added	3 Days Strength, N/mm ²	7 Days Strength, N/mm ²	28 Days Strength, N/mm ²
0.5%	4.67	7.64	11.875
1%	6.185	9.43	13.14
1.5%	7.48	11.615	14.05
2%	7.73	11.83	14.48
2.5%	7.9	11.98	15.32
3%	3.94	6.86	10.02
0.5%	4.67	7.64	11.875

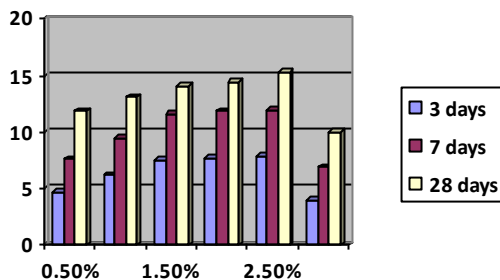


Figure 11: Flexural strength(sisal fiber)

Table 9: Flexural strength of FRHSC:(nylon fiber)

% of Fibers Added	3 Days Strength, N/mm ²	7 Days Strength, N/mm ²	28 Days Strength, N/mm ²
0.5%	4.38	7.155	10.54
1%	5.97	8.435	11.71
1.5%	6.58	11.185	12.9
2%	6.73	11.32	13.04
2.5%	6.96	11.84	13.38
3%	7.34	12.13	13.63
3.5%	3.52	6.43	9.86

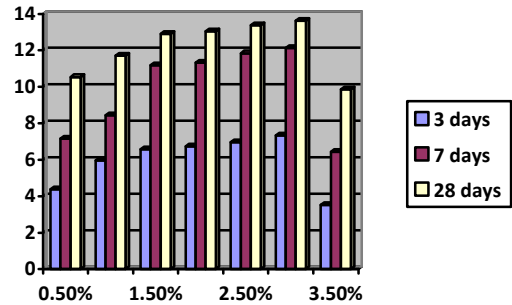


Figure 12: Flexural strength(nylon fiber)

Table 10 flexural strength of FRHSC:(polypropylene fiber)

% of Fibers Added	3 Days Strength, N/mm ²	7 Days Strength, N/mm ²	28 Days Strength, N/mm ²
0.5%	4.945	8.18	12.09
1%	6.545	9.935	13.185
1.5%	7.715	11.78	15.51
2%	8.12	12.21	15.76
2.5%	4.28	7.26	11.34

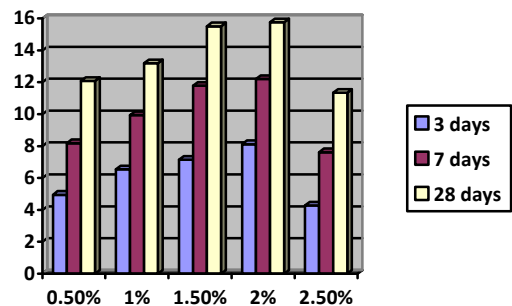


Figure 13: Flexural strength (polypropylene fiber)

4. Conclusion

Based on the systematic and detailed experimental study conducted on FRHSC mixes with an aim to develop performance mixes, the following are the conclusions arrived. Polypropylene has high strength when compared to the remaining fiber and the concrete mix while adding Polypropylene fiber gives optimization at 2.5%. Sisal fiber has less strength when compared to the polypropylene fiber and more strength comparative to the nylon fiber and the concrete mix while adding Sisal fiber gives optimization at 3%. Nylon fiber has less strength when compared to the remaining two fibers and the concrete mix while adding Nylon fiber gives optimization at 3.5% while adding the fiber to the concrete mix, the absorption of water increases more than the conventional concrete.

5. Acknowledgement

I express sincere thanks to Dr.C. Muthamizchelvan, Director of E&T, SRM UNIVERSITY, whose good wishes, inspiration and support were instrumental in accomplishing this task.

I express sincere thanks to Dr.R.Annadurai, HOD of Civil engineering whose good wishes, inspiration and support were instrumental in accomplishing this task.

I am thankful to my IPT coordinator Dr. V. Thamilarasu, Professor, for his guidance. I am also thankful to my class in charge Mr. N. Ganapathy Rama swamy Assistant Professor and all the staff members of our department for their timely help in this practical training. I also sincerely thank Mr. k.s. Praveen, Assistant professor and my project gaid for his wounderfull cooperation and support.

References

- [1] IS: 456 – 2000 Code of practice for plain and reinforced concrete (fourth revision).
- [2] IS: 516 – 1959 Method of test for strength of concrete (sixth print January, 1976).
- [3] IS: 12269-1987 Specifications for 53 Grade Ordinary Portland Cement.
- [4] IS: 383- 1970 Specification for Coarse and fine aggregates from natural sources for concrete.
- [5] IS: 2386 – 1963 (all parts) Methods of test for aggregate for concrete.
- [6] IS: 3812 – 1981 Specifications for fly – ash for use as pozzolana and admixture (first revision).
- [7] IS: 3812 – 2003 Specifications for Fly Ash for use as pozzolona and admixture.
- [8] IS: 1727 – 1967 Methods of test for pozzolana materials (first revision, reprinted January, 1989).
- [9] IS: 9103 – 1999 Specification for admixtures for concrete (first revision).
- [10] IS: 1199 – 1959 Methods of sampling and analysis of concrete.
- [11] IS: 5513 – 1996 Specification for vicat apparatus (second revision).
- [12] IS: 5514 – 1996 Specification for apparatus used in Le-chatelier test (first revision).
- [13] IS: 5515 – 1983 Specification for compaction factor apparatus (first revision).
- [14] IS: 5816 – 1970 Method of test for splitting tensile strength of concrete cylinders.
- [15] IS: 7320 – 1974 Specification for concrete slump test apparatus.
- [16] IS: 9399 – 1979 Specification for apparatus for flexural testing of concrete