

critical. Factors which degrade performance of network in disasters are

A. Frequent Topology Change

In disaster conditions network topology changes frequently due to node failure, damage, addition, energy depletion, or channel fading. This increases complexity of design.

B. Severe Energy, Computation, and Storage Constraints

Sensor nodes are highly limited in energy, computation, and storage capacities. Percentage of average energy consumed by network in disaster should be minimum since energy is limited resource.

C. Many - to - One Traffic Pattern

In disaster management, the data sensed by sensor nodes flow from multiple source nodes to a particular sink, exhibiting a many - to - one traffic pattern.

D. Dynamic and Unreliable Environment

Disasters results in a dynamic unreliable environment. On one hand, the topology of a sensor network may change frequently due to node failures, damages, additions, or energy depletion.

E. Noise

Nodes are linked by a wireless medium, which become noisy, error prone, and time varying in disaster. Probability of noise in disaster is very critical issue since intensity of noise is more in disaster.

F. Channel Fading

The connectivity of the network may be frequently disrupted because of channel fading or signal attenuation.

G. Normalized Routing Load

This efficiency of routing protocol in disaster is lowered. Thus with normalized routing load, efficiency of routing can be increased.

H. Adaptability

Network must be designed in such a way that it should be able to adapt itself even in disaster. While designing such network above mentioned challenges should also be considered. Hence adaptability is important design issue.

I. Node Failure

Disaster causes failure of nodes in network. In order to maintain connectivity nodes which got destroyed due to disaster should be detected. Thus disaster scenario has diverse complexities. With rapid growth of complexity and scale of problem domain, creating efficient simulation for disaster management has become key requirement for research industry and management.

3. Proposed Approach

Due to the complexity of the problem and the number of parameters to be considered, a genetic algorithm combined with the network simulator NS-2 is proposed for disaster management. Genetic algorithms are set evolutionary algorithm. They use techniques, which inspired from evolutionary biology such as inheritance, selection,

crossover and mutation. NS-2 is object oriented simulator. It is widely used by research and academics in order to simulate both wired and wireless networks. NS-2 is used to evaluate fitness function. TCL is programming used. Bonnmotion is freely available mobility generator. It creates and analyzes mobility of nodes in network. Results can be verified with help of c program to check weather desired optimal outcome has been achieved or not. If desired optimal outcome is not achieved then new generation are again created with help of genetic operations such as crossover and mutation as shown in fig1.

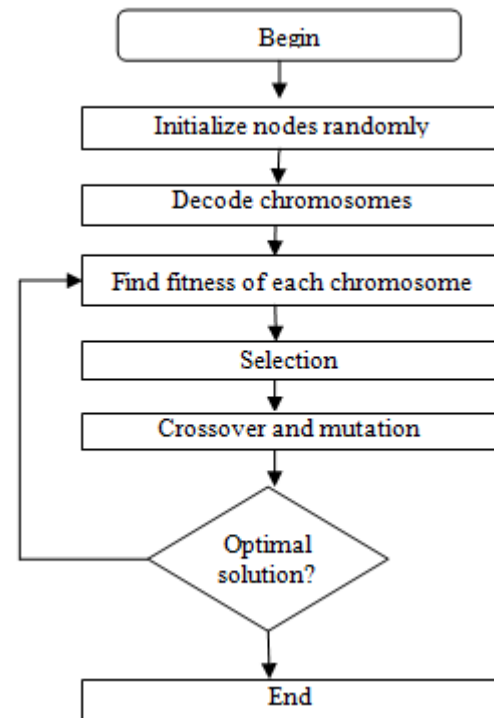


Figure 1: Flow chart of GA

4. Genetic Algorithm Implementation

Genetic algorithms are computational model which are inspired from evolution. These algorithms encode potential to provide solution to specific problem. The mechanism is based on the selection scheme from $(\mu+\lambda)$ evolution strategy. The algorithm maintains a population of N_t chromosomes. The fitness function evaluates the goodness of each chromosome. The μ best chromosomes are included directly in the next generation. The algorithm starts using an initial population P_i that is composed of N_t chromosomes. Goldberg studied the optimum number of chromosomes for a population according to the chromosome's length. Goldberg's main conclusion was that the optimum population size value gets higher as the chromosome's length increases. The initial population is generated randomly in order to preserve the diversity in the population. The GA is based on two operations, crossover and mutation. These operations are responsible for generating λ chromosomes of a new population. The crossover consists of using two members of a population P_j to generate two new members of the next population P_{j+1} by crossing their genetic information. The new chromosomes contain genetic information from the predecessors. The purpose of mutation is to change the genetic information of a chromosome

included in P_j to generate a new chromosome of P_{j+1} . Fig. 1 illustrates proposed genetic algorithm.

A. Chromosomes Encoding

A chromosome C_i is a set of positions of the sink nodes. The nodes are deployed forming a collaborative network working along with the mobile nodes. We denote $K (P_1, P_2, P_3 \dots P_n)$ as the set of parameters coded to form the chromosome, where n is the total number of parameters. Each parameter is coded using a number of bits B_l (from $l = 0$ to $l = n$). The chromosome's length is defined as follows

$$L = \sum_{l=0}^n B_l \quad (1)$$

B. Evaluation Function

In genetic algorithm fitness function is evaluated. Fitness function is evaluated with help of simulation in NS-2. Fitness function determines goodness of chromosomes. The fitness function interprets the chromosome in terms of physical representation and evaluates its fitness based on traits of being desired in the solution. But Fitness function must accurately measure quality of chromosomes.

Therefore, the fitness function that involves computational efficiency and accuracy of parameters is defined as follows

$$f_i = \frac{1}{\sum_{j=1}^{l_i-1} C_{g_i(j), g_i(j+1)}} \quad (2)$$

Where f_i represents the fitness value of the chromosome, l_i is the length of the chromosome, $g_i(j)$ represents the gene (node) of the locus in the j chromosome, C and is the link cost between nodes. The fitness function of GAs is generally the objective function that requires to be optimized. In a sense, the fitness function can be thought of as fully reflecting the objective function. The fitness function has a higher value when the fitness characteristic of the chromosome is better than others. In addition, the fitness function introduces a criterion for Selection of chromosomes.

C. Selection

The selection process is used in order to improve quality of population. Through this process, selection chances of high quality chromosomes in next generation are increased. The selection thereby focuses the exploration on promising regions in the solution space. Selection pressure characterizes the selection schemes. It is defined as the ratio of the probability of selection of the best chromosome in the population to that of an average chromosome. Hence, a high selection pressure results in the population's reaching equilibrium very quickly, but it inevitably sacrifices genetic diversity (i.e., convergence to a suboptimal solution). There are two basic types of selection scheme used commonly in current practice: (1) proportionate and (2) ordinal-based selection Both selection schemes suffer when the selection pressure is inadequate (i.e., low or high). Proportionate selection picks out chromosomes based on their fitness values relative to the fitness of the other chromosomes in the population. It is generally more sensitive to selection pressure. Hence, a scaling function is employed for redistributing the fitness range of the population in order to adapt to the selection pressure. Examples of such a selection type include roulette wheel selection, stochastic remainder selection, and stochastic universal selection. Ordinal-based

selection schemes select chromosomes based not upon their fitness, but upon their rank within the population. The chromosomes are ranked according to their fitness values. It is noted that the selection pressure (intensity) is independent of the fitness distribution of the population, and is based solely on the relative ranking of the population. Since the selection pressure is the degree to which the better chromosomes are favored, it drives the GAs toward improved population fitness over succeeding generations.

D. Transition procedure

The procedure used to generate a new population P_{j+1} from the previous population P_j is as follows:

- 1) The best 20% chromosomes are copied from P_j to P_{j+1} . This ensures that the best individuals of each population will be included in the next generation. Thus, the likelihood of using a good chromosome for reproduction operations becomes higher.
- 2) The new 80% of the chromosomes are generated by using crossover and mutation operations. This aims to favour the diversity of the chromosomes. P_c denotes the probability of a chromosome i to take part in a crossover operation. Similarly, P_m is the probability of a chromosome i to take part in a mutation operation.

E. Crossover

The new 80% of the next population is obtained using crossover operation.

The probability P_c of a C_i is calculated as follows

$$P_{C_i} = \frac{f_f(C_i)}{\sum_{i=0}^n f_f(C_i)} \quad (3)$$

The term $f_f(C_i)$ stands for the evaluation of the fitness function for the chromosome C_i . In this way, the best chromosomes are most likely to be selected. Note that the genetic algorithm is an Elitist algorithm where the best individuals always pass to the next generation. The crossover operation is illustrated in Fig. 5. A two-point crossover operation has been implemented. The two points of cross are denoted by P_{K_1} and P_{K_2} , where $0 \leq K \leq l$ and l is the size of the chromosome. The value of K_1 and K_2 are randomly chosen for each crossover operation and always $K_1 < K_2$. These points divide each chromosome into three parts namely RG_j , MG_j and LG_j . The two new chromosomes are then obtained swapping $LG_{j,1}$ by $LG_{j,2}$, and $RG_{j,1}$ by $RG_{j,2}$.

F. Mutation

The new population is obtained by mutation operation. Mutation operation is to make small changes in chromosomes. These changes consist of modifying one chromosome's bit. The position of the mutated bit is denoted by P_m , where $0 \leq m \leq l$. The value of P_m is randomly chosen for each mutation operation

G. Stopping Criteria

We consider $P_{av,j}$ as the population's average fitness function, then stopping criterion can be formulated as

$$S_c \rightarrow P_{av,j+1} \leq P_{av,j} \quad (4)$$

The population's average fitness function has been chosen as the stop criterion of the genetic algorithm.

5. Conclusions

In this article we have presented an overview of genetic algorithm for optimizing connectivity in disaster scenario. We have outlined design challenges first followed by Genetic algorithm as proposed approach for disaster Management.

References

- [1] D. G. Reina, S. L. Toral Marin, N. Bessis, F. Barreroa, E. Asimakopoulou, "An evolutionary computation approach for optimizing connectivity in Disaster Response Scenarios" in Applied Soft Computing Elsevier journal pp no. 833–845 nov 2012.
- [2] Jui-Sheng Chou, Chi-Fong Tsai , Zong-Yao Chen , Ming-Hui Sun "Biological-based genetic algorithms for optimized disaster response resource allocation" in Computers & Industrial Engineering 74 pp no. 52–67 Elsevier Journal 2014.
- [3] Chang Wook and R. S. Ramakrishna "A genetic algorithm for shortest path routing problem and the sizing of populations" IEEE Transaction On Evolutionary Computation, Vol. 6, pp No. 6, December 2002.
- [4] Andres Cencerrado, Ana Cortes, Tomas Margalef "Genetic algorithm characterization for the quality assessment of forest fire spread prediction" in Procedia Computer Science 9 Elsevier Journal pp no. 312 – 320 2012.
- [5] Jovilyn Therse B Fajardo, Carlos M. Opus "Mobile disaster management system using the android technology" in WSEAS Trans on Communication Issue 6, Volume 9, 2010.
- [6] Elkin Urrea , C. Safak Sahina, Ibrahim Hookelek, Umit Uyar , Michael Conner A, Giorgio Bertoli C, Christian Pizzo C " A taxonomy on bio-inspired topology control for knowledge sharing mobile agents" in Ad Hoc Networks Elsevier Journal Vol 7 April 2008.
- [7] Falko Dressler, A, Ozgur B. Akanb A Survey On Bio-Inspired Networking April 2010.
- [8] Michael Meisel A, Vasileios Pappas B, Lixia Zhang A "A Taxonomy Of Biologically Inspired Research In Computer Networking" Computer Networks, Vol 54, pp no 6 ,April 2010.
- [9] Zhenyu Liu, Marta Z. Kwiatkowska, And Costas Constantinou "A biologically inspired qos routing algorithm for mobile ad hoc networks" in International Journal On Wireless And Mobile Computing June 2009.

Author Profile

Neeta patil received the B.E degree in Electronics and Telecommunications Engineering from shivaji University, kolhapur, Maharashtra, India in 2008. She is now pursuing Master degree in communication engineering from D.Y.P.I.E.T. Pimpri, Pune, India

Mr. S. D. Chavan, working as Associate Professor M. E. (Electronics), PhD (Appeared) Electronics Experience consists of 13 years of Academics and 5 years of Industrial experience. Professional Body membership include LMISTE, MIETE