

Enhanced QoS-Oriented Distributed Routing Protocol for Hybrid Wireless Networks

Mithun Johny¹, Renju Samuel²

^{1,2}Department of Computer Science and Engineering, KMP College of Engineering, Asamanoor P.O Poomala, Odakkali, Kerala, India

Abstract: As wi-fi interaction benefits reputation, significant research has been dedicated to assisting real-time transmission with strict Quality of Service (QoS) specifications for wi-fi programs. Simultaneously, a wi-fi multiple system that integrates a mobile wi-fi ad hoc system (MANET) and a wi-fi facilities system has been proven to be a better alternative for the next generation wi-fi systems. By straight implementing source reservation-based QoS redirecting for MANETs, compounds networks inherit incorrect booking and competition condition problems in MANETs. How to assurance the QoS in multiple systems continues to be an open problem. In this document, we recommend a QoS-Oriented Allocated redirecting method (QOD) to improve the QoS support ability of hybrid networks. Using less transmitting trips and anycast transmitting features of the multiple systems, QOD transforms the bundle redirecting issue to a source arranging issue. QOD features five algorithms: 1) a QoS-guaranteed neighbor selection criteria to meet the transmitting wait need, 2) a distributed bundle arranging criteria to further reduce transmission wait, 3) a mobility-based section resizing criteria that adaptively adapts section size according to node flexibility in order to decrease transmitting time, 4) a traffic repetitive removal criteria to increase the transmitting throughput, and 5) a data redundancy elimination-based transmitting criteria to remove the repetitive information to further improve the transmitting QoS. Analytical and simulator results in accordance with the unique way-point design and the actual human flexibility design show that QOD can provide high QoS efficiency in terms of expense, transmitting wait, mobility-resilience, and scalability.

Keywords: Hybrid wireless networks, multihop cellular networks, routing algorithms, quality of service.

1. Introduction

The fast growth of wi-fi systems has stimulated numerous wi-fi programs that have been used in extensive places such as business, urgent solutions, military, knowledge, and enjoyment. The variety of WiFi capable cellular phones such as laptop computers and handheld devices (e.g., smart phone and product PC) has been increasing rapidly. For example, the variety of wi-fi Internet users has tripled world-wide in the last three years, and the number of smart phone customers in US has improved from 92.8 thousand this year to 121.4 thousand this year, and will reach around 207 thousand by 2017 [1]. These days, people wish to watch video clips, play activities, observe TV, and make long distance conferencing via wi-fi cellular phones “on the go.” Therefore, movie loading programs such as Qik [2], Flixwagon [3], and FaceTime [4] on the infrastructure wireless systems have obtained improving attention recently. These programs use an facilities to directly connect cellular customers for movie viewing or connections in real time. The extensive use of wi-fi and mobile devices and the improving requirement for solutions for cellular multimedia streaming solutions are resulting in a appealing near future where wi-fi multi-media solutions (e.g., cellular game playing, online TV, and on the internet conferences) are commonly implemented. The appearance and the imagined upcoming of real-time and multimedia programs have triggered the need of high Quality of Service (QoS) assistance in wi-fi and mobile networking surroundings [5]. The QoS assistance decreases end-to-end transmitting wait and increases throughput to guarantee the smooth connections between mobile devices and wi-fi infrastructures.

Simultaneously, multiple wi-fi systems (i.e., multihop cellular

networks) have been confirmed to be a better network framework for the next generation wi-fi networks [6], [7], [8], and can help to deal with the strict end-to-end QoS specifications of different programs. Hybrid networks synergistically merge facilities networks and MANETs to make use of each other. Particularly, infrastructure networks enhance the scalability of MANETs, while MANETs instantly set up self-organizing networks, increasing the protection of the infrastructure networks. In an automobile opportunistic accessibility system (an instance of multiple networks), individuals in automobiles need to upload or obtain video clips from distant Online servers through accessibility factors (APs) (i.e., platform stations) spreading out in a town. Since it is unlikely that the platform channels cover the whole town to sustain completely powerful enough indication everywhere to assistance a program demanding great weblink prices, the automobiles themselves can type a MANET to enhance the coverage of the platform channels, offering ongoing network connections

How to assurance the QoS in multiple wi-fi networks with high flexibility and varying information transfer usage still remain an start query. In the facilities wi-fi systems, QoS supply (e.g., Intserv, RSVP) has been proposed for QoS redirecting, which often needs node negotiation, entrance management, resource booking, and priority arranging of packages. However, it is more challenging to assurance QoS in MANETs due to their unique features such as customer flexibility, route difference mistakes, and restricted information transfer usage. Thus, efforts to straight adjust the QoS alternatives for facilities systems to MANETs generally do not have amazing achievements. Numerous reservation-based QoS redirecting methods have been proposed for MANETs that make tracks established by nodes and hyperlinks that reserve their sources to meet up

with QoS specifications. Although these methods can improve the QoS of the MANETs to a certain level, they experience from invalid reservation and competition situation issues [12]. Invalid reservation issue indicates that the arranged resources become ineffective if the information transmitting direction between a source node and a location node smashes. Race condition problem indicates a dual allowance of the same resource to two different QoS routes.

2. The QOD Protocol

In this paper, we focus on the neighbor node selection for QoS-guaranteed transmission. QOD is the first work for QoS routing in hybrid networks.

2.1 Network and Service Models

We consider a several wi-fi system with an arbitrary number of platform channels growing over the system. N mobile nodes are shifting around in the system. Each node $n_i \in \mathbb{N}$ uses IEEE 802.11 interface with the Carrier Sensing Multiple Accessibility with Accident Avoidance (CSMA/CA) method. Since a several system where nodes are prepared with multi interfaces that transmit packets through multi channels produce much less interference than a several system where nodes are equipped with only one WiFi interface, we believe that each node is equipped with only one WiFi interface to be able to cope with a more challenging issue. Therefore, the platform channels considered in this document are access factors (APs). The WiFi interface enables nodes to link with both APs and mobile nodes. For example, in a School university, normally only buildings have APs. Therefore, individuals that do not have WiFi access but near to structures can use two-hop relay transmissions to get connected to the APs in the structures. Feeney et al. regarded the identical situation in his perform.

The QoS specifications mainly consist of end-to-end delay bound, which is essential for many programs with stringent real-time need. While throughput guarantee is also essential, it is instantly assured by bounding the transmitting wait for a certain quantity of packets. The resource node performs entrance management to check whether there are enough sources to fulfil the requirements of QoS of the bundle flow. Fig. 1 reveals the network design of a multiple system. For example, when a source node n_1 wants to publish information to an Online server through APs, it can select to deliver packages to the APs directly by itself or need its next door neighbour nodes n_2 , n_3 , or n_4 to support the bundle transmitting.

We believe that lining up happens only at the outcome ports of the cellular nodes. After a cellular node produces the packets, it first tries to deliver the packages to its nearby APs that can assure the QoS specifications. If it is not able (e.g., out of the transmitting variety of APs or in a hot/dead spot), it depends on its others who live close by that can assure the QoS requirements for sending packages to APs. Relaying for a packet flow can be made as a procedure, in which packets from a resource node navigate a variety of queuing servers to some APs. In this design, the issue of how to assure QoS redirecting can be modified to the problem

of how to routine the next door neighbour sources between nodes to make sure QoS of bundle redirecting.

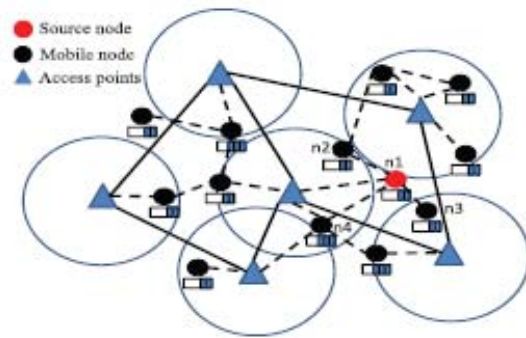


Figure 1: The network model of the hybrid networks

2.2 An Overview of the QOD Protocol

Arranging practicality is the capability of a node to assure packet to reach its location within QoS specifications. As described, when the QoS of the immediate transmission between a resource node and an AP cannot be assured, the source node delivers a demand concept to its next door neighbour nodes. After getting a ahead demand from a resource node, a neighbour node n_i with area application less than a threshold replies the resource node. The response concept contains information about available sources for verifying packet scheduling feasibility.

3. QOD Distributed Routing Protocol

3.1 QoS-Guaranteed Neighbor Selection Algorithm

Since short delay is the major real-time QoS requirement for traffic transmission, QOD features the Earliest Deadline First scheduling algorithm (EDF), which is a deadline driven scheduling algorithm for data traffic scheduling in intermediate nodes. In this algorithm, an intermediate node assigns the highest priority to the packet with the closest deadline and forwards the packet with the highest priority first. The source node needs to distribute its packets to nodes based on their available workload ratio to make the scheduling feasible in each of the neighbor nodes the problem can be modeled as a linear programming process.

3.2 Distributed Packet Scheduling Algorithm

The issue of how to choose intermediate nodes that can assure the QoS of the bundle transmission and how a resource node designates visitors to the intermediate nodes to make sure their arranging practicality. To be able to further decrease the flow transmitting time, a distributed packet arranging criteria is suggested for bundle redirecting. This criteria designates previously produced packages to forwarders with greater lining up setbacks and scheduling feasibility, while designates more lately produced packets to forwarders with reduced lining up setbacks and scheduling feasibility, so that the transmitting wait of an whole packet stream can be decreased.

3.3 Mobility-Based Packet Resizing Algorithm

In a very powerful cellular wi-fi system, the transmission link between two nodes is regularly split up. The wait produced in the bundle retransmission degrades the QoS of the transmitting of a bundle circulation. On the other hand, a node in a very powerful system has higher probability to fulfil different cellular nodes and APs, which is valuable to source arranging. Reducing bundle dimension can increase the arranging practicality of an advanced node and reduces bundle losing possibility. However, we cannot make the dimension the bundle too little because it generates more packages to be passed on, generating greater packet overhead. Depending on this reasoning and making use of the advantages of node flexibility, we recommend a mobility-based packet resizing criteria for QOD in this area. The basic idea is that the bigger dimension packages are allocated to lower mobility advanced nodes and more compact dimension packages are assigned to greater flexibility advanced nodes, which increases the QoS-guaranteed bundle signals. Particularly, in QOD, as the flexibility of a node improves, the size of a bundle sent from a node to its next door neighbour nodes decreases.

3.4 Soft-Deadline-Based Forwarding Scheduling

In the EDF criteria, an advanced node forwards the packages in the transaction from the packages with the closest work deadlines to the packages with the furthest work deadlines. If an advanced node has no issue to fulfil all packets deadlines in sending, that is, the packages are scheduling feasible, the EDF criteria performs satisfactorily. However, when an advanced node has too many packages to forward out and the work deadlines of some packages must be missed, EDF sends out the packages with the closest deadlines but may wait the packages with the farthest deadlines. Therefore, EDF is appropriate for hard-deadline driven programs (e.g., on the internet conferences) where packets must be submitted before their work deadlines but may not be fair to all coming packages in soft-deadline motivated applications (e.g., on the internet TV), where the due date losing is sometimes appropriate. To experience equity in the bundle forwarding scheduling for soft-deadline motivated programs, a forwarding node can use the least slack first (LSF) scheduling algorithm.

With the LSF algorithm, an advanced node regularly determines the slack duration of each of its packages, and sends the packet with the least slack time. If all packages have the same slack time value, one bundle is arbitrarily selected to be sent out. Therefore, the purpose of LSF is different from that of EDF. LSF does not aim to finish transferring the packet lows before their work deadlines. Rather, it is designed to create delays and the dimensions of late aspect in the late packets (delayed dimension in short) of different bundle moves almost the same. If the packages are arranging possible according to the LSF criteria can fulfil all work deadlines of packages. Otherwise, the sending node requires changes to forward the packages depending on their slack periods. Therefore, LSF can achieve more equity than EDF. QOD can select either LSF or EDF in accordance with

the programs. The main concerns of the packages are determined by the selected plan.

3.5 Data Redundancy Elimination

The mobile nodes set their NAV principles in accordance with the overhearing message's transmission duration time. A huge NAV results in a little available bandwidth and a little arranging practicality of the cellular nodes. Therefore, by decreasing the NAV value, we can enhance the arranging practicality of the intermediate nodes and sequentially enhance the QoS of the packet transmission. Due to the transmitting function of the wireless systems, in a multiple system, the APs and mobile nodes can expense and storage cache packages.

We use an end-to-end traffic redundancy removal (TRE) algorithm to remove the redundancy information to enhance the QoS of the bundle transmitting in QOD. TRE uses a chunking scheme to figure out the border of the sections in a data stream. The resource node caches the information it has sent out and the recipient also caches its obtained information.

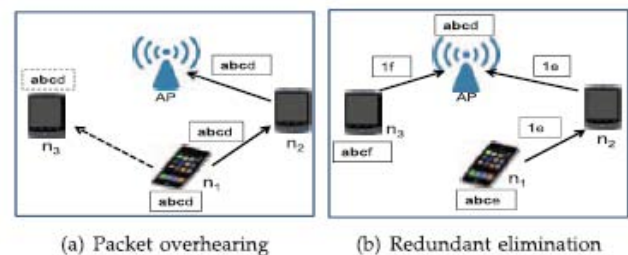


Figure 2: Example of packet redundant elimination

In QOD with TRE, the AP and mobile nodes overhear and storage cache packages. From the overhearing, the nodes know who have obtained the packages. When a resource node begins to deliver out packages, it tests the material for duplicated chunks in its storage cache. If the emailer discovers a copied chunk and it knows that the AP recipient has obtained this chunk before, it changes this amount with its trademark (i.e., SHA-1hash value). When the AP gets the trademark, it searches the trademark in its regional storage cache. If the AP caches the chunk associated with the trademark, it delivers a confirmation message to the emailer and changes the trademark with the matched information amount. Otherwise, the AP demands the chunk of the trademark from the sender. The AP is able to reconstruct the full chunk using its signature. The reduction in the dimension the concept improves the scheduling feasibility of the mobile nodes, which further improves the QoS efficiency. Fig 2 shows the example of packet redundancy elimination. Packet overhearing and packet redundant elimination is illustrated in the following figure.

4. Proposed Tracking Mechanism

In MANET communication the loss is occur due to the dynamic topology (Frequent link failure). But in the proposed scheme, the link failure is reduced by considering

the parameter Connection Existence Period. The Connection Existence Period is the time during which that particular node is present inside its communication range. A link between two mobile nodes will be active only during which that two nodes are in the transmission range of each other. The following formula is used to calculate the CEP:

$$CEP(i, j) = D(i, j) / V_r$$

$D(i, j)$ is the distance between node i and j . V_r is the relative velocity between nodes i and j . The CEP is the important parameter in this technique to ensure the reliability in the network. This is used to avoid the frequent link failure in the MANET.

5. Performance Evaluation

This area shows the identifying qualities of QOD in comparison to E-AODV, S-Multihop, Two-hop through models on NS-2. E-AODV is a source reservation-based redirecting method for QoS routing in MANETs. This method expands AODV by adding information of the highest possible wait and lowest available bandwidth of each next door neighbour in a node's redirecting desk. To apply E-AODV in multiple systems, we let a source node look for the QoS assured direction to an AP. The intermediate nodes along the direction source the resources for the source node. In S-Multihop, a node always forwards a bundle to a next hop node that has little shield utilization than itself until the bundle gets to an AP. In Two-hop, the source node adaptively selects immediate transmitting (i.e., directly transmit packages to the AP) and ahead transmitting (i.e. transmit packages through a sending node) to forward packets to APs.

5.1 Performance with Different Mobility Speeds

The proposed scheme plots the QoS throughputs of all techniques in comparison to the node mobility speed. It reveals that the QoS throughputs of all systems decrease as node flexibility improves. This is because higher mobility causes greater regular weblink smashes, which leads to more bundle falls. Reestablishing the damaged links results in a lengthy transmitting wait for following packages. We can also see that the QoS throughputs of QOD and Two-hop a little bit reduce, but those of E-AODV and S-Multihop reduce considerably. E-AODV and S-Multihop have much more trips in the redirecting routes from the source nodes to APs than QOD and Two-hop. A more time routing path generates greater possibility of weblink malfunction during the bundle transmitting. As Two-hop and QOD only have two trips in the redirecting routes to APs, the brief routes have lower possibility to crack down. Even if a weblink breaks down, the resource node can easily select another forwarder. Therefore, node flexibility does not significantly affect these two methods.

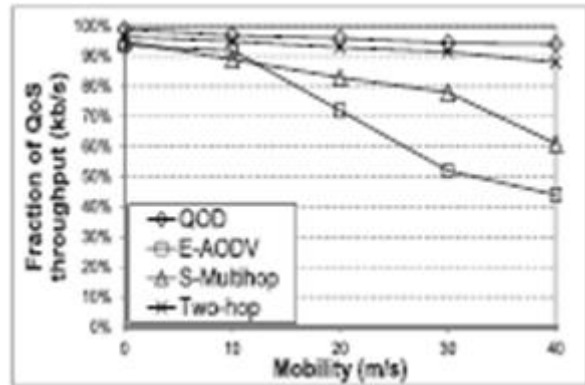


Figure 3: Fraction of QoS throughput versus mobility

5.2 Performance with Different Number of APs

The increase of APs results in greater QoS throughput in all systems. This is because more APs help to decrease path lengths and actual ranges between resource nodes and APs, resulting in reduced bundle transmitting than the signal power, resulting in greater information transmitting amount. More APs significantly decrease the measures of initially lengthy routes to the APs in E-AODV and S-Multihop, thus dramatically increasing their QoS throughput. In comparison, as QOD and Two-hop brief direction duration, their QoS throughput increase amount has a smaller footprint sized than those of S-Multihop due to the same factors. E-AODV produces less QoS throughput than S-Multihop. When the number of the APs in the program is little, the redirecting direction lengths of S-Multihop and E-AODV are more time than those of QOD and Two-hop. Therefore, the QoS throughputs of QOD and Two-hop are bigger than those of S-Multihop and E-AODV. It is very exciting to see that S-Multihop has greater QoS throughput than Two-hop when the number of APs in the program is bigger than 6. In this case, S-Multihop produces more compact direction measures. Also, S-Multihop uses arranging criteria that considers buffer utilization for bundle redirecting, which decreases the packet queuing wait. However, Tw-hop only

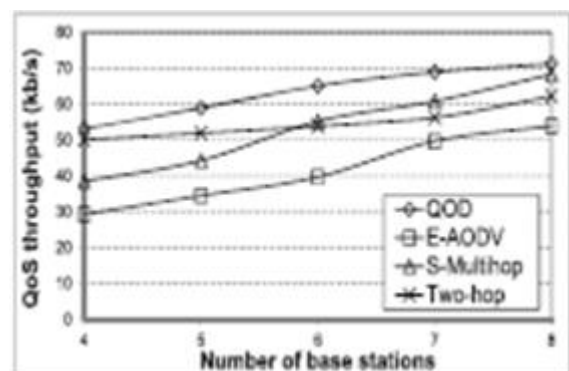



Figure 4: QoS throughput versus number of APs

views channel condition for the bundle redirecting and disregards the buffer usage, creating high-bandwidth nodes quickly crowded. As a outcome, S-Multihop produces greater QoS throughput than Two-hop. Since E-AODV also is affected with blockage on the nodes near to the APs and its regular direction duration is larger than Two-hop, its QoS throughput is less than Twohop. As QOD can successfully routine the channel resources around the resource node for

bundle sending, its QoS throughput continues to be regularly the biggest.

5.3 Performance with Different Network Sizes

The QoS throughput of the systems with different variety of nodes at the average mobility rate of 0 and 20 m/s, is shown respectively. Both figures show that as the variety of nodes in the program improves, the QoS throughput of QOD improves, that of Two-hop remains continuous, but those of E-AODV and S-Multihop decrease. The throughput improve in QOD is due to the increasing variety of nodes in the program, which results in an increasing variety of others who live nearby of a node, allowing it to have more available sources for bundle visitors scheduling number of bytes received is plotted against time.

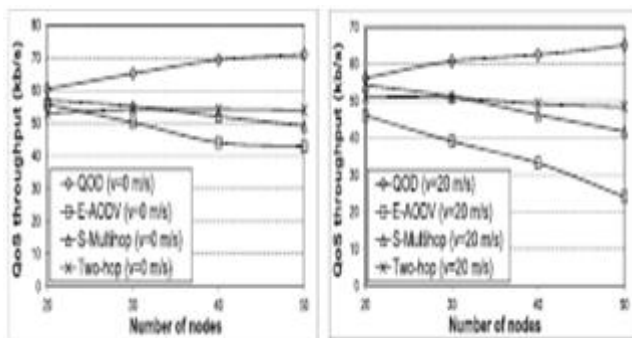

(a) Ave. node mobility $v=0\text{m/s}$ (b) Ave. node mobility $v=20\text{m/s}$
Figure 5: QoS throughput versus network size and node mobility

6. Conclusion

Hybrid wi-fi systems that incorporate MANETs and infrastructure wi-fi systems have confirmed to be a better network framework for the next creation systems. However, little attempt has been dedicated to assisting QoS routing in hybrid systems. Immediate adopting of the QoS routing methods in MANETs into hybrid networks inherits their disadvantages. In this document, we recommend a QoS oriented distributed redirecting method (QOD) for hybrid network works to offer QoS solutions in a very dynamic scenario. Using the improvements of hybrid networks, i.e., any cast transmitting and brief transmission hops, QOD converts the bundle redirecting issue to a packet arranging issue. In QOD, a resource node directly transmits packages to an AP if the direct transmitting can guarantee the QoS of the visitors. Otherwise, the resource node schedules the packages to a number of certified neighbour nodes. Particularly, QOD functions five methods. The QoS-guaranteed next door neighbour choice criteria select qualified neighbours for bundle sending. The distributed packet arranging criteria plans the bundle transmission to further decrease the bundle transmitting time. The mobility-based bundle resizing criteria resizes packets and designates more compact packages to nodes with quicker flexibility to guarantee the redirecting QoS in a very cellular atmosphere. The visitor's repetitive elimination-based transmitting algorithm can further improve the transmitting throughput. The soft-deadline-based sending arranging accomplishes fairness in bundle sending arranging when some packets are not

arranging possible. Trial outcomes display that QOD can accomplish high mobility-resilience, scalability, and contention decrease. Later on, we plan to assess the performance of QOD in accordance with the real testbed.

References

- [1] "A Majority of U.S. Mobile Users Are Now Smartphone Users," <http://adage.com/article/digital/a-majority-u-s-mobile-users-smartphone-users/241717>, 2013.
- [2] H. Wu, C. Qiao, S. De, and O. Tonguz, "Integrated Cell and Ad Hoc Relaying Systems: iCAR," *IEEE J. Selected Areas in Comm.*, vol. 19, no. 10, pp. 2105-2115, Oct. 2001.
- [3] R. Braden, D. Clark, and S. Shenker, *Integrated Services in the Internet Architecture: An Overview*, IETF RFC 1633, 1994.
- [4] E. Crawley, R. Nair, B. Rajagopalan, and H. Sandick, *Resource Reservation Protocol RSVP*, IETF RFC 2205, 1998.
- [5] I. Jawhar and J. Wu, "Quality of Service Routing in Mobile Ad hoc Network," *Network Theory and Applications*, Springer, 2004.
- [6] T. Reddy, I. Karthigeyan, B. Manoj, and C. Murthy, "Quality of Service Provisioning in Ad Hoc Wireless Networks: A Survey of Issues and Solutions," *Ad Hoc Networks*, vol. 4, no. 1, pp. 83-124, 2006.
- [7] X. Du, "QoS Routing Based on Multi-Class Nodes for Mobile Ad Hoc Networks," *Ad Hoc Networks*, vol. 2, pp. 241-254, 2004.
- [8] S. Jiang, Y. Liu, Y. Jiang, and Q. Yin, "Provisioning of Adaptability to Variable Topologies for Routing Schemes in MANETs," *IEEE J. Selected Areas in Comm.*, vol. 22, no. 7, pp. 1347-1356, Sept. 2004.

Author Profile



Mithun Johny received the B.Tech Degree in Information Technology from Anna University Chennai, Tamil Nadu, India, in 2011. He is currently pursuing M.Tech Degree in Computer Science and Engineering with Specialization in Cyber Security from Mahatma Gandhi University, Kerala, India.



Renju Samuel received the B. Tech Degree in Information Technology, and M. Tech Degree in Computer Science and Engineering from Anna University, Chennai, India, in 2011 and 2014 from Sathyabama University respectively. He is Currently Working as Assistant Professor in KMP College Of Engineering.