

# Design and Analysis of a Double-well Mutual Balance Hydraulic Pumping Unit

Gong-xiang Zhong<sup>1</sup>, Xiao-hua Li<sup>2</sup>, Lin Jing<sup>3</sup>

(Education Ministry Key Laboratory of Oil and Gas Equipment, Southwest Petroleum University, Chengdu 610500)

**Abstract:** According to the characteristics of the small spacing of cluster wells, this paper designs a double-well mutual balance hydraulic pumping unit. One pumping unit is used for two wells, and it achieves interactive balance pumping through two balanced hydraulic cylinders. The hydraulic system is simulated by AMESim software. The simulation results are in good agreement with the design curve, which proves the designed pumping unit has excellent working performance.

**Keywords:** double wells; hydraulic system design; AMESim analysis; system simulation; hydraulic components

## 1. Introduction

From the point of view of the development process of pumping, the general trend of technological development towards long stroke, large load, precision balance, save energy, adaptability and other aspects of development. Hydraulic fluid is essential for modern industrial energy intensive transmission mode, it can minimize the equipment size and weight. The hydraulic pumping unit character is use for hydraulic drive technology, which can maximize well productivity, good oil economy, especially for the late development of hydraulic pumping heavy oil and oil fields are more attractive [1]. Formation of products at home and abroad and in the development stage of hydraulic pumping unit are mostly adopts single well oil production method, using the accumulator as well as the applied load to balance the well up and down stroke. Single well oil hydraulic pumping unit has been well used in foreign countries, and achieved the expected results. But for the limited space, the number of multi well oil field, the oil well a hydraulic pumping work must result in equipment footprint, high equipment purchase cost, low energy efficiency. To solve this problem, this propose put forward a double-well mutual balance hydraulic pumping unit with a hydraulic pumping unit while pumping wells, with better economic benefits. Two differential oil pump work, it use of two wells up and down stroke difference balance. By adjusting the depth, sucker rod pump combinations and pump diameter size at two wells pump, so that the load balance each other two wells can be made more precise balancing and energy efficiency.

## 2. Hydraulic pumping unit of hydraulic system design

The double-well mutual balance hydraulic pumping unit hydraulic system is mainly composed of the power unit, control valve-s, actuators, hydraulic accessories and hydraulic medium of five parts, the basic structure shown in Figure 1. Power means for the two variable piston pump as the main pump system (3-1, 3-2), is provided at the accumulator-charged pump (3-4), in addition to the system set a manual

pump (8); The main of pressure control valve has pilot relief valve (5-1, 5-2) and directacting relief valve (11); the main of flow control valve has flow diversion valve (10-1, 10-2, 10-3, 10-4, 10-5, 10-6); the main of directional.

1. Tank; 2 suction filter; 3 hydraulic pump; 4 motor; 5. Pilot Relief Valve (with relief); 6-way valve; 7 electro-hydraulic valve; 8 manually change 9 manual shut-off valve;; the valve 10 bypass flow valve; 11 directly Operated; 12 pressure switch; 13 cooler; 14 gauge; 15 drive the hydraulic cylinder; hydraulic balance 16. cylinder; 17 accumulator; 18 heater;. SQ limit switch; A, B, C, D, E, F quick connector.

Figure 1 Double-well Mutual Balance Hydraulic Pumping Unit hydraulic system diagram


Control valve with a check valve (6-1, 6-2, 6-3, 6-4), electrohydraulic valve 7, manual valve 8; actuator consists of balancing hydraulic cylinders (16-1, 16-2) and a drive cylinder (15-1, 15-2). Hydraulic accessories including tank (1), fittings, filters (2), a heat exchanger (13, 18), the accumulator (17), indicating instrument (14), pressure switch (12), limit switch (SQ), etc; hydraulic medium HM antiwear hydraulic oil. According to the flow rate is determined by speed, the velocity of driving hydraulic cylinder will direct result of the large flow of system is needed, pumping unit stroke require adjust, it demand of the system provided by adjustable flow range is adjustable. So choose two adjustable quantitative piston pump as the main pump system (3-1, 3-2), The system required flow is large, open two hydraulic pumps at the same time, the system needed to little flow, it regulate the hydraulic pump of variable institution or only open a pump. The accumulator is provided at a charge pump (3-4), it use of supplement pressure oil for the accumulator or for the first time to use, when the balance cylinder system leaks to supplement oil for its pipeline. In addition the system setup manual pump (8), is used in the case of the main system is not work, it guaranteed driving the hydraulic cylinder position. Two flow diversion valve are communicated with a balanced hydraulic cylinders (16-1, 16-2) in the front chamber and the other balancing hydraulic cylinders (16-1, 16-2) of the rear chamber. Flow diversion

valve on the oil supply system will be 1:1 split, the pressure of the hydraulic oil comes from the power source score di-vided into two parts, transported to the ba-lancing hydraulic cylinders to achieve drive the two hydraulic cylinders synchronous phase operation.

cannot be recoveryoil in a short time, it can take advantage of features of single well oil. When the double-well work, each element work con-ditionof the hydraulic system as follows:


**2.1 Analysis of the principle double-well**

Limit switch SQ1, SQ2 detected piston-stroke of the driving hydraulic cylinder 1-5-1, limit switch SQ1 is located at the topdead center, limit switch SQ2 is located at the down dead center of the pistonstroke. When the drive cylinder 15-1 piston rod is located in the lower dead point, the limit switch SQ2 receive electrical signals applied to the electro-hydraulic valve 7, so that the electro-hydraulic valve 1YA was electric, electro-hydraulic valve fluid communication with the left. At this time, the power plant sent out from the high pressure fluid through the check valve 6-1 and 6-2 to reach the left side of the electrohydraulic valve 7; hydraulic oil conveyed by the electro-hydraulic valve in the bypass flow valve 10-1, 10-2, 10-3 is at 1: 1 split, the split oil respectively reach balance cylinder 16-1 lower chamber and 16-2 up chamber. Balancing hydraulic cylinders 16-1 oil pressure chamber pressure is increased to promote the drive cylinder 15-1 on the trip. Balance hydraulic cylinder 16-2 up chamber pressure oil and drive hydraulic cylinder 15-2 load both to promote balance hydraulic cylinders 16-2 oil return, thus promoting driving the hydraulic cylinders 15-2 down stroke. Balancing hydraulic cylinders 16-1 oil return through the upper chamber and flow diversion valve 10-4, 10-5, 10-6 back to the tank. Its passage schematic diagram shown in Figure 2

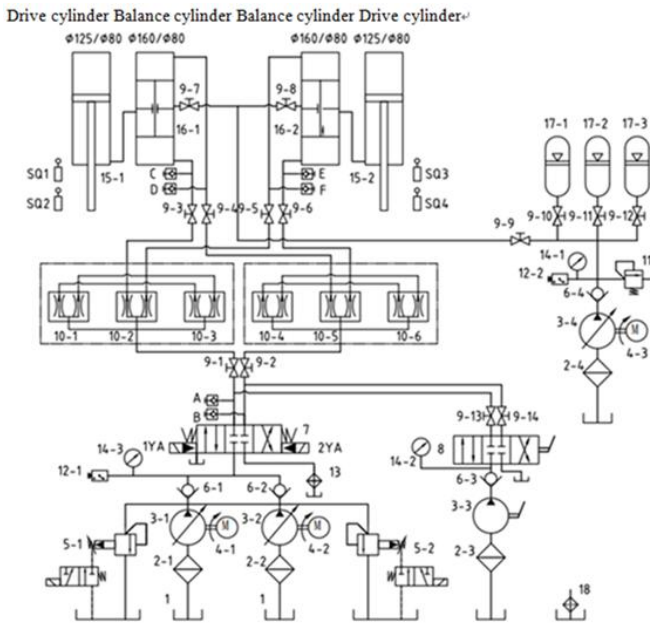

**Hydraulic System Works Analysis**

Double-well mutual balance hydraulic pumping unit is mainly used in the oil double-well conditions, but also have a single-well oil production capabilities. When one well needs workover or encounter other immeasurably factors

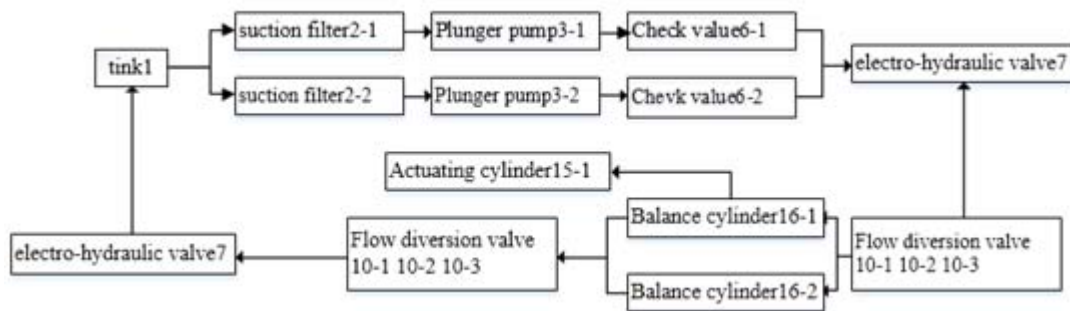

**Figure 2:** shuangjing working oil flow schematic


When the drive cylinder 15-1 piston rod is located in the top dead center, the trip switch SQ1 receive electrical signals applied to the electro-hydraulic valve 7, so that the electro-hydraulic valve 2YA was electric, electro-hydraulic valve the right of communication with the fluid.

**2.2 Analysis of the principle of single well**

When a single well work, driving the hydraulic cylinders 15-1 or 15-2 drive the hydraulic cylinders working separately, each element in the work of this particular analysis of the hydraulic cylinder drive system 15-1 work alone. Close manual shut-off valve 9-1, 9-2, 9-3, 9-4 and 9-8, with hydraulic hoses and quick connectors A, C, B and D. Limit

switch SQ1 and SQ2 limit switch detecting drive hydraulic cylinder 15-1 piston stroke, limit switch SQ1 15-1 is located at the top dead center of the piston stroke, limit switch SQ1 15-2 is located at the under dead center of the piston stroke.

When the drive cylinder 15-1 piston rod is located in the lower dead point, the limit switch SQ2 receive electrical signals applied to the electro-hydraulic valve 7, so that the electro-hydraulic valve 1YA was electric, electro-hydraulic valve fluid communication with the left side of the drive cylinder 15-1 start on the stroke movement. Its passage schematic diagram shown in Figure 3.

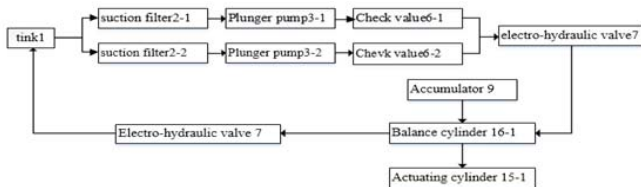


**Figure 3:** a schematic view of a single well working oil flow

When the drive cylinder 15-1 piston rod is located in the top dead center, the trip switch SQ1 receive electrical signals applied to the electro-hydraulic valve 7, so that the electro-hydraulic valve 2YA was electric, electro-hydraulic valve the right of communication with the fluid driven cylinder 15-1 to start the next stroke movement.

### 3. Pumping Operation Curve Planning

According to the relevant technical parameters of the existing hydraulic pumping unit is designed to determine the pumping-stroke of 6m, pumping 4 times. The actual situation, the pumping speed curve is usually designed into sinusoidal and trapezoidal profile. Sinusoidal velocity curve used for beam pumping unit, trapezoidal velocity curve used for the new multi-linear oil production equipment, which motion process comprises uniformly accelerated, uniform, uniform deceleration phase and the inverted repeat this procedure. According to stroke, stroke frequency, acceleration and speed requirements, design of hydraulic pumping unit suspension point velocity trapezoidal speed profile [4], as shown in Figure 4.  $t_1$ - acceleration time, deceleration time;  $t_2$ - uniform time.

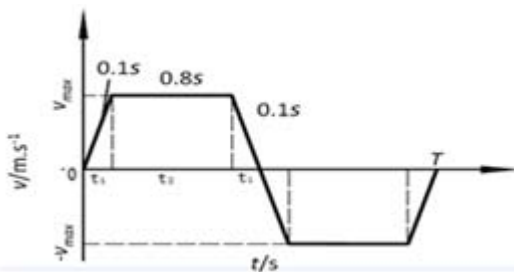

**Figure 4:** trapezoidal velocity curve design

Within a cycle of run light pole run 12m, where the up stroke 6m, the lower stroke 6m. Early light rod running from the bottom dead center begins to move, after time  $t_1$ , 0.6m of uniformly accelerated the campaign began uniform

motion, after uniform motion time  $t_2$ , 4.8m started deceleration, deceleration time is  $t_1$ , deceleration distance is 0.6m. According to Figure 4 lists the following formula.

$$2t_1 + t_2 = 7.5 \quad (1)$$


$$at_1 t_2 = 4.8 \quad (2)$$

$$\frac{1}{2} at_1^2 = 0.6 \quad (3)$$

United the formula (1), (2), (3), calculated value of the acceleration during accelerate-on and deceleration of  $0.768 \text{ m/s}^2$ ; maximum operating speed of the rod is  $0.96 \text{ m/s}$ .

### 4. Hydraulic system AMESim simulation

It was established driven hydraulic cylinders and load model, balancing hydraulic cylinders model, flow diversion valve model in AMESim [3, 4]. Combining element module and modeling analysis of some of the components, the establishment of double-well mutual balance double-well oil hydraulic pumping unit of AMESim model, a model shown in Figure 5, for the entire hydraulic system simulation.

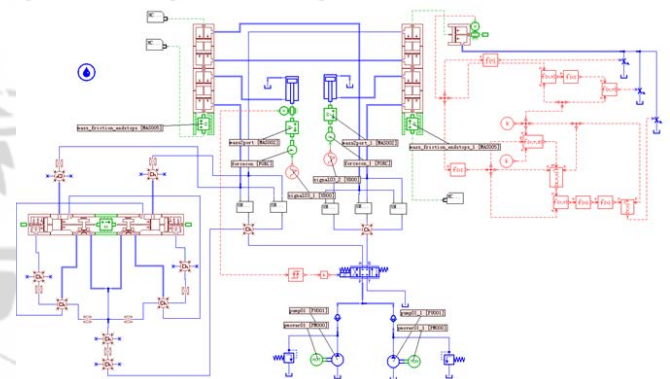

**Figure 5:** Shuangjing mutual balance Shuangjing oil hydraulic pumping unit of AMESim model

Setting hydraulic pump 01, pump 01\_1 displacement of 282ml/r, motor pmover01, pmover01\_1 rotational speed of 1480 r/min, in two stages analog load signal signal03\_1, signal03\_2 of signal value, namely the up stroke 160kN and lower stroke stroke 65 kN. Setting simulation time is 60seconds, graphic printing interval of 1 seconds, for the double-well mutual balance double-well oil hydraulic pumping unit of AMESim model simulation.

The results of simulation after processing by driving hydraulic cylinder 1 load curve as shown in figure 6, the displacement curve as shown in figure 7, speed curve as shown in figure 8.



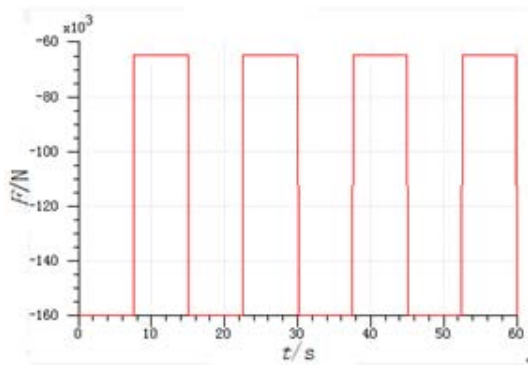


Figure 6: driving hydraulic cylinder 1 load curve

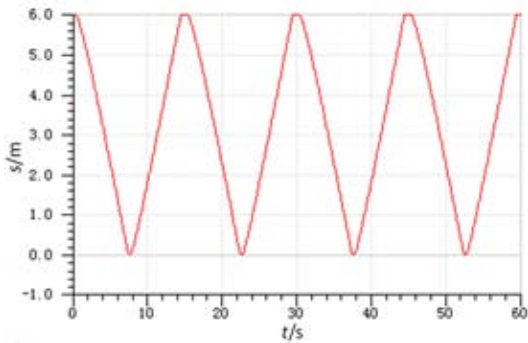


Figure 7 1: displacement curve of driving hydraulic cylinder

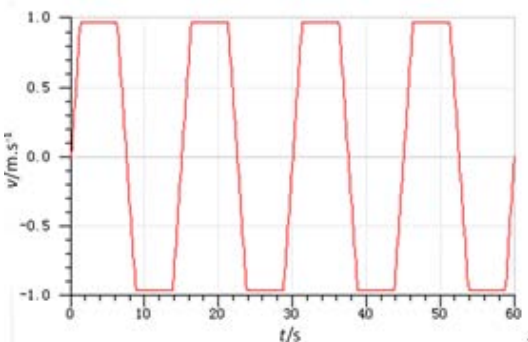


Figure 8: driving hydraulic cylinder 1 speed curve

Driving hydraulic cylinder 2 with the same driving hydraulic cylinder 1 movement, in the opposite direction. According to the analysis results, double-well mutual balance double-well oil hydraulic pumping unit of AMESim model driven hydraulic cylinders 1 and 2 of the displacement curve and velocity curve are in conformity with the design curve (figure 4). Combined with the stroke, the design of the hydraulic pumping unit a time cycle of 12m, on the trip 6m, lower stroke 6m. Acceleration period and reduction period of time are used in 1.25Seconds, deceleration distance of 0.6m; upper and lower stroke uniform movement period time of 5seconds, uniform motion distance of 4.8m. The design of the hydraulic pumping unit has a longer uniform motion stage, variable motion stage only the total stroke travel 1/5. Longer uniform motion stage of the unit with stable operation, reduced the rod string and liquid column suffered shock loads and inertia loads.

The same specifications of the beam pumping unit to achieve maximum acceleration  $0.9\text{m/s}^2$  and acceleration

values have been changed, the maximum speed of  $1.3\text{m/s}$ <sup>[5]</sup>. The same specifications LDCJ16-6 type chain pumping unit calculated maximum acceleration  $1.85\text{m/s}^2$ , the maximum speed of  $0.8\text{m/s}$ <sup>[6]</sup>. Designed a double-well mutual balance hydraulic pumping unit with respect to the beam pumping unit and chain pumping unit has a minimum stable acceleration and a suitable speed. In the pump suction process, changes in acceleration and greater acceleration is not good for the suction pump, and when the oil stability absorption stability, greater operating speed can increase the value of the oil pump speed. Therefore, this paper designed a double-well mutual balance hydraulic pumping unit in terms of stability and change in acceleration rate advantage over the same type of beam pumping unit and chain pumping unit.

## 5. Conclusion

This paper designs a kind of double-well balanced hydraulic pumping unit, can realize double production at the same time compatible with single well oil production. The hydraulic pumping unit adopts the hydraulic cylinder reciprocating drive rod, easy to realize long stroke pumping unit requirements; double oil well production when two differential pumping Wells, the balancing oil cylinder stroke up and down; accumulator balance when single oil well production accumulator up and down stroke, facilitate the well maintenance. AMESim software using the hydraulic system simulation resulting motion characteristic curve is consistent with the design requirements. The simulation results show that the designed double-well mutual balancing hydraulic pumping unit has a longer uniform motion stage and a shorter variable motion stage, its acceleration is less than the same size of the beam pumping unit and chain drive pumping unit, improve the working conditions of pumping and extending the life of the pumping unit and its components.

## References

- [1] Bo Tao. The Development and State of Art of the Hydraulic Pumping Unit in China [J]. Drilling & Production Technology, 2002, 25(02): 68-70.
- [2] Zhou Cheng. Development of Electro Hydraulic Proportional Lifting System of Rod Pump Simulation Test Device [D]. Zhejiang University, 2010.
- [3] Zhang Xian-yu, Chen Xiao-hu, He Qing-fei. Modeling and Simulation for Fault of Hydraulic Actuator Based on AMESim [J]. Hydraulics Pneumatics & Seals, 2011, (10): 26-28.
- [4] Jin Sheng-qiu, Cheng Kai, Wang Peng-yu. Analysis and Improving the Structure of Synchronization Valve Based on AMESim [J]. Chinese Hydraulics & Pneumatics, 2009, (09): 64-68.
- [5] Xiong Da-jun, Liu Qiao-lin, Xu Zheng-guo. A Compound Balancing Pumping Unit with Phased Walking Beam and Phased Crank [J]. Petroleum Machinery, 2002, 30(07): 27-28.
- [6] Ren Hongwei, Liu Yan-chong, Shi Yong-jun. Structure Design of Long-Stroke Chain-Type Pumping Unit with Axis Reversing [J]. Oil Field Equipment, 2009, 38(09): 39-41.

## Author Profile

**Zhong Gongxiang** (1962-), male, Sichuan Province, Chengdu city, sichuan province, Master, is mainly engaged in petroleum mechanical engineering research and teaching. Address: (610 500) Xindu district of chengdu in sichuan province.

## Fund Project

Ministry of Education Key Laboratory "Oil and gas equipment" (Southwest Petroleum University) funded projects (2014sts03).

