

An Advanced Survey on Hierarchical Routing Protocols in WSN

Sandhya Bankar¹, Simran Khiani²

¹Student, Dept. of Computer Engineering, G.H. R.C.O.E.M, Savitribai Phule Pune University, Pune, India

²Assistant Professor, Dept. of Computer Engineering, G.H. R.C.O.E.M, Savitribai Phule Pune University, Pune, India

Abstract: *Wireless Sensor Networks (WSNs) gives minimum expenses answers for different true issues. WSN is made of independent sensors builder at distance to control physical or environmental conditions, for example, sound, vibration, weight, temperature, movement or toxins and to agreeably exchange their information through the network to a main area. WSN are deployed in hostile environment so network becomes highly vulnerable and produces risk of attack. Therefore, numerous directing, power administration and information spread protocol have been particularly intended for WSNs. Planning power proficient directing mechanism to expand the whole network lifetime has turned out to be essential. In this paper performance of different routing protocols are compared, so this paper thinks about the diverse various hierarchical directing protocols.*

Keywords: Cluster based routing protocol, Wireless Sensor Network, Sensor nodes, Cluster head

1. Introduction

Present day's wireless networks and multifunctional sensors grow quickly with computerized preparing, energy supply and correspondence capacities. Wireless sensor networks are being mostly installed in physical situations for controlling fine-grains in various classes of applications [1], [3]. Specifically there are two instance modes installing wireless sensor networks. In one mode, if the cost of the sensors is high and installation with a large number of sensors is not possible then a little number of sensors is installed in some preselected areas in the region. Here the most elevated issue is sensor placement i.e. the place sensors to satisfy certain tentative criteria. In second mode, if minimum value sensors with a restricted battery life are available then they are normally installed with high thickness (up to 20 nodes) [2]. Here, the most elected issue is thickness control i.e. how to control the thickness and relative areas of capable sensors whenever so that they accurately cover the observing region. Other relevant issue is how to gyrate the role of competent sensors in this all the sensors so as to expand the network lifetime. [4].

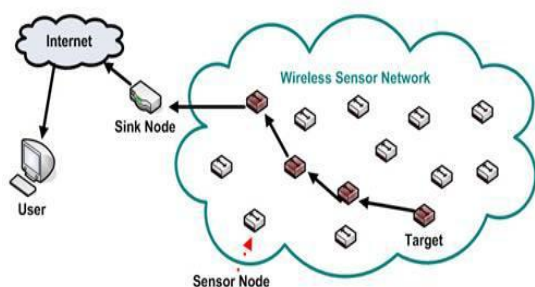


Figure 1: Architecture of Wireless Sensor Network[4]

Present research on wireless sensor networks has specifically postulate that nodes are homogeneous. But truth is different, that is homogeneous sensor networks rarely exist and homogeneous sensors additionally have various capacities like various levels of mitigate rate, introductory power etc. So the research on heterogeneous networks appears where nodes considered are of two or three

types. Number of specialists ordinarily assumes that nodes are isolated on their functionalities base that are of two types, for example, advanced and normal nodes. Beginning power of energetic nodes is large and less total in contrast to the normal nodes and they play role as clustering heads and relay nodes in heterogeneous networks. All specialists expect that the normal nodes have identical length data to transmit to the base station.

Existing research in a heterogeneous sensor networks have two various types of nodes where they have same starting power but various length data to transmit. The primary limitation in designing a directing protocol in WSNs is the restricted energy of sensor nodes that approved by authority the outline of power-efficient correspondence protocol. Numerous protocols proposed for various wireless networks like portable or ad-hoc. But, these protocols can't be utilized specifically because recourse barrier of sensor nodes like restricted battery power, computational speed and thickness of nodes and human interface of nodes gadgets in network. Goal of clustering systems in wireless sensor networks is to collect data among group of nodes, which select leaders (i.e. Clusterhead) among themselves. The clusterheads or leader has the role of totalling the data and reporting the refined data to the base station (BS). This paper studies the various ordering directing protocol for expanding the network lifetime in heterogeneous WSN.

Routing Protocols in WSN

There is larger variation between the directing in wireless sensor networks and conventional directing in settled networks. Wireless links are not safe, there is no infrastructure, sensor nodes may down and power saving requirements is must for routing protocols [5]. Many routing algorithms come into available for wireless networks in general. All available main routing protocols for WSNs may be isolated into seven categories [6]. But this paper only comes across the various hierarchical protocols.

A. Hierarchical Protocols

From past few years hierarchical clustering in WSN have founded with various perspectives [3]. Clustering is a power efficient communication protocol. Sensors make use of this protocol to transfer their sensed information to the sink. Here an example of layered protocols is deliberated in which a network is created with number of *clumps* or *clusters* of sensors. *Cluster head* controls each cluster, which is responsible for coordinating the data transferring activities of all sensors in its cluster.

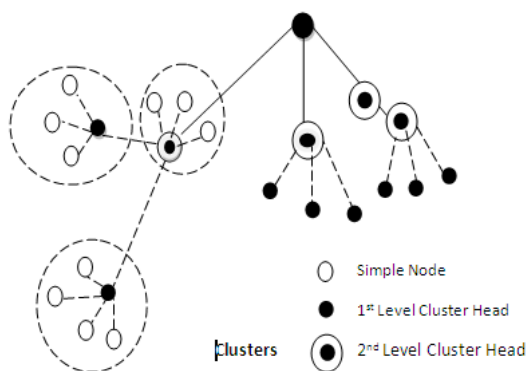


Fig. 2 Cluster-based Hierarchical Model [4]

Figure 2 show a hierarchical approach which breaches the network into clustered layers. Every node are clustered into clumps with a cluster head. The work of cluster head is to forward data from the cluster to the other cluster heads or base stations. Travelling of data is done from a lower clustered layer to a higher one. Even though data moves from one node to another but each moves (hops) from one layer to another it covers larger distances. This immediately moves the data to the base station. Clustering gives needed optimization capacities at the cluster heads. This section gives a sample review of hierarchical-based routing protocols for WSNs.

2. Literature Survey

1) Low-energy adaptive clustering hierarchy (LEACH):-

First and mostly used power-efficient hierarchical clustering algorithm for WSNs is LEACH that was aimed for mitigating energy consumption. The clustering task is rotated in between the nodes, based on total length in LEACH. Each cluster head (CH) used route communication in advance the data to the base station (BS). Here, clusters are used to expand the life of the wireless sensor network. On a clustering (or fusion) based LEACH technique together or totals the original data into a smaller size of data packages that contains only expressive information to all personal sensors. It separates the network into number of cluster of sensors, where each cluster build by using localized coordination and monitor to mitigate the size of data that are transferred to the sink. It also makes directing and data spread more scalable and strong. A randomize rotation of high-power CH position used by LEACH, rather than selecting in static manner for giving a chance to all sensors to do a roll of CHs and restrict the battery empty of an personal sensor and dyeing quickly. The operation of

LEACH is separated into rounds each with two steps as below.

- (i) A setup phase for managing the network into clusters, CH advertisement, and transmission schedule creation
- (ii) A steady-state step to data totalling, compression, and transmission to the sink.

LEACH is does not need global knowledge of network. LEACH mitigates energy consumption by two ways such as-

- (a) By reducing the communication value between sensors and their cluster heads and
- (b) By turning off non-head nodes as much as possible.

Using single-hop directing in LEACH, each node can transfer data directly to the cluster-head and to the sink. Therefore, it is not applicable to networks installed in large areas. The idea of more overhead bring by dynamic clustering e.g. head changes, advertisements etc., which may mitigates the gain in power consumption. While LEACH helps the sensors within their cluster use their power slowly, sensors are located farther away from the sink then CHs consume a larger in account of power. LEACH clustering closes in a finite number of iterations, but it supposes uniform power consumption for CHs. It does not guarantee decent CH spread and

2) Power-Efficient Gathering in Sensor Information Systems (PEGASIS):-

The expand of the LEACH protocol is PEGASIS. It forms chains from sensor nodes so that each node can transfers and collects from a neighbour and from that chain only one node is selected to transfer to the base station (sink). The data is received and moves from one node to another node, grouped and in the end sent towards base station. Greedy way used for the building of chain. Instead of using numerous nodes PEGASIS avert cluster composition and uses only single node in a chain to transfer to the BS (sink). In the data fusion phase, instead of sending data directly to its CH as in the case of LEACH, a sensor transfers to its nearest neighbours. The building phase in PEGASIS routing protocol supposes that all the sensors have global knowledge about the network, the locations of the sensors and use a greedy approach. Due to low battery energy a sensor fails or dies. The chain construction is done using the same greedy approach by bypassing the failed sensor. Compared to LEACH in each round, a randomly sensor node chosen from the chain will transfer the grouped data to the BS, thus mitigating the per round power expenses. PEGASIS topology management can introduce important overhead specifically for highly used networks.

3) Hybrid, Energy-Efficient Distributed Clustering (HEED):-

The basic scheme of LEACH expands HEED [10, 13] by using residual power and node thickness as a metric to gain power balancing for cluster selection. Using adaptive transmission energy in the inter-clustering communication it handles in multi-hop networks. HEED was aimed with the following four primary objectives.

- (i) By spreading energy consumption expanding network lifetime
- (ii) Closing the clustering process within a fixed number of iterations,

- (iii) mitigating control overhead
- (iv) Producing well-speeded CHs and compact clusters.

In HEED, the aimed algorithm appearing at middle selects CHs corresponding to a mixture of two clustering parameters. Their residual power of every sensor node is the primary parameter and the secondary parameter is the intra-cluster communication cost as a method of cluster thickness or degree of node. To probabilistically select a starting set of CHs the primary parameter is used while for breaching ties the secondary parameter is used. The HEED clustering enhances network lifetime over LEACH clustering since LEACH haphazardly chooses CHs, they might bring about quicker demise of a few nodes. At long last the CHs chose in HEED are very much speeded over the network and the communication cost is minimized. The cluster choice manages just a subset of parameters, where it can possibly inflict constraints on the system. These functions are suitable for expanding the network lifetime instead of for the whole needs of WSN.

Teenager gatherings sensors into clusters with every lead by a CH. It is a hierarchical cluster protocol. The sensors from a cluster report their detected data to their CH. Until the data reaches the sink the CH sends amassed data to top level CH. A various levelled gathering is utilized in the sensor network architecture of TEEN. Where it depends on the closer nodes form cluster and this procedure goes on the second level until the BS (sink) is come to. TEEN is valuable for applications, for example, the clients can control a tradeoff between power proficiency, reaction time progressively and data precision.

TEEN uses a data-centric function with various levelled approach. TEEN is suitable for time critical detecting applications. The message transmission requires more power than data detecting thus the power utilization in this protocol is less than the proactive networks. But, TEEN is not suitable for detecting applications where periodic reports are required along thus the client may not get any data at all if the thresholds are not came to.

5) Adaptive Periodic Threshold Sensitive Energy Efficient Sensor Network Protocol (APTEEN):-

APTEEN is gives a change to TEEN to defeating its constraints and attempting to accomplish at both catching occasional data collections (LEACH) and also responding to time-critical occasions (TEEN). APTEEN permits the sensor to send their detected data periodically and provide reaction to any sudden change in the value of the detected property by reporting the relating values to their CHs. The architecture of APTEEN uses the idea of hierarchical clustering for power proficient communication among the source sensors and the sink. These protocol backings to three following various query types.

- (i) Historical query for examining the past data values
- (ii) One-time query which takes a depiction perspective of the network
- (iii) Determine queries which screen an event for a period of time.

APTEEN ensures the lower power scattering and countless sensors alive [16].

6) Energy Efficient Homogenous Clustering Algorithm for Wireless Sensor Networks:-

Homogeneous clustering algorithm for wireless sensor network is proposed by Singh et al. [2]. That saves energy and expands network life. By guaranteeing a homogeneous distribution of nodes in the clusters the life compass of the network is expanded. A new cluster head is chosen on the basic of the leftover power of existing cluster heads, closest hop distance of the node and holdback value. The homogeneous algorithm considers that each node is either a cluster head or a participant from one of the cluster in the wireless sensor network. In the existing clustering algorithm the cluster participants are consistently distributed and hence the life of the network is more amplified. Just cluster heads telecast cluster arrangement message and not to the each node. Hence, it amplifies the life of the sensor network.

The utilization of this methodology is to expand the life compass of the network by guaranteeing a homogeneous distribution of nodes in the clusters. Hence there is less accepting and transmitting overhead on a Cluster Head.

3. Survey Table

Table 1: Survey Table

Reference Paper Name	Technique	Pros.	Cons.
Data aggregation and routing in wireless sensor networks: Optimal and heuristic algorithms [20].	present solutions for the data gathering and routing problem with in-network aggregation in WSNs.	It improves system lifetime with acceptable levels of latency in data aggregation and without sacrificing data quality	Lack of Security.
An energy-aware routing protocol in wireless sensor networks [21].	Introduces a simple but efficient approach, namely, intracluster coverage to cope with the area coverage problem.	It has far better performance than HEED when node density goes higher than 0.01 nodes/m ² .	Need to improve the network lifetime.
Integrated topology control and routing in wireless sensor network design for prolonged network lifetime [22].	Hierarchical network structures with multiple sinks at which the data collected by the sensors are gathered through the cluster heads are adopted.	This model effectively utilizes both the position and the energy-level aspects of the sensors while selecting the CHs and avoids the highest-energy sensors.	Need to improve the security.
Energy efficient communication protocol for wireless micro-sensor networks [23].	Propose LEACH (Low-Energy Adaptive Clustering Hierarchy), a clustering-based protocol that utilizes randomized rotation of local cluster base stations (cluster-heads) to evenly distribute the energy load among the sensors in the network.	To distribute energy dissipation evenly throughout the sensors, doubling the useful system lifetime for the networks we simulated.	Communication cost is more.

4. Methodology Used

In this system studied the building an efficient clustering algorithm which can provide efficient cluster heads. The effective lossless data aggregation with energy aware route formations is a plus in our algorithm. The security is also critical concern in this context which is left unnoticed in the existing systems. System introducing a security algorithm which provides data security as well as authentication for eachnode.

5. Conclusion

Power efficiency is the principle challenge in the configuration of routing protocols for WSNs because of the rare power assets of sensors. The best target of routing protocol design is to keep the sensors working for whatever length of time that conceivable and expand the network lifetime. The power consumption of the sensors is dominated by data transmission and reception. Planning power-efficient routing system to augment the whole network lifetime has turned out to be important. This paper thinks about the distinctive hierarchical routing protocols to accomplish a best heuristic algorithm to amplify the network lifetime in wireless sensor network outline.

References

- [1] S. Vasudevan, M. Adler, D. Goeckel, and D. Towsley, "Efficient algorithms for neighbour discovery in wireless networks,"IEEE/ACMTrans.Netw., vol. 21, no. 1, pp. 69–83, Feb. 2013.
- [2] S.K. Singh, M.P. Singh, and D.K. Singh, "Energy-efficient Homogeneous Clustering Algorithm for Wireless Sensor Network", International Journal of Wireless & Mobile Networks (IJWMN), Aug. 2010, vol. 2, no. 3, pp. 49-61.
- [3] S.K. Singh, M.P. Singh, and D.K. Singh, "A survey of Energy-Efficient Hierarchical Cluster-based Routing in Wireless Sensor Networks", International Journal of Advanced Networking and Application (IJANA), Sept.–Oct. 2010, vol. 02, issue 02, pp. 570–580.
- [4] Jun Zheng and Abbas Jamalipour, "Wireless Sensor Networks: A Networking Perspective", a book published by A John & Sons, Inc, and IEEE, 2009.
- [5] S. Misra et al. (eds.) Guide to Wireless Sensor Networks, Computer Communications and Networks, DOI: 10.1007/978-1-841882-218-4 4, Springer-Verlag London Limited 2009.
- [6] Ming Liu, Jiannong Cao, Guihai Chen, and Xiaomin Wang, "An Energy-Aware Routing Protocol in Wireless Sensor Networks", Sensors 2009, vol. 9, pp. 445-462.
- [7] Luis Javier GarcíaVillalba, Ana Lucila Sandoval Orozco, Alicia Triviño Cabrera, and CláudiaJacyBarenco Abbas, "Routing Protocol in Wireless Sensor Networks", Sensors 2009, vol. 9, pp. 8399- 8421.
- [8] KemalAkkaya and Mohamed Younis, "A Survey on Routing Protocols for Wireless Sensor Networks", Ad hoc Networks, vol. 3, no. 3, May 2005, pp. 325-349.