

# Seismic Evaluation of Steel Frames Using Different Sections of X Bracing

Thasneem Yaseen I<sup>1</sup>, Linda Ann Mathew<sup>2</sup>

<sup>1</sup>P G Student, Computer Aided Structural Engineering, Sree Buddha College of Engineering, Pathanamthitta, Kerala, India

<sup>2</sup>Assistant Professor, Department of Civil Engineering, Sree Buddha College of Engineering, Pathanamthitta, Kerala, India

**Abstract:** *Braced frames are a very common form of construction, being economic to construct and simple to analyse. Bracing is an effective upgrading strategy to enhance the global stiffness and strength of steel frames. In the present study, a typical 10 storey steel frame is analyzed with X bracing for different IS steel sections with different depths. The building is situated in seismic zone III. Response spectrum analysis will be carried to investigate seismic performance of a multi storey steel frame building and to find the most effective section in resisting lateral loads. The software used for this study is ETABS. The main parameters considered in this study are storey shears, maximum storey drifts, maximum storey displacements and joint displacements.*

**Keywords:** Braced Frames, Maximum storey displacements, Response Spectrum, Storey Drifts, Storey Shears

## 1. Introduction

Steel frame is a building technique with a skeleton frame of vertical steel columns and horizontal I beams constructed in a rectangular grid to support the floors, roofs, walls, of a building which are all attached to the frame. It can be strengthened by various methods to resist lateral forces. The most widely used method is braced frames. Braced frames are a very common form of construction, being economic to construct and simple to analyse. Economy comes from the inexpensive, nominally pinned connections between beams and columns. In braced construction, beams and columns are designed under vertical load only, assuming the bracing system carries all lateral loads. Bracing enhances the global stiffness and strength of steel frames. It can increase the energy absorption of structures or decrease the demand imposed by earthquake loads. The applications of braced frame includes structures like bridges, aircrafts, buildings, transmission towers.

Bracing can be concentric or eccentric. In concentric braced frames members intersect at a node. These bracings increase the lateral stiffness of the frame and decrease the lateral storey drift. In an eccentrically braced frame the members intersect the girder at an eccentricity „e“ and hence transmit forces by shear and bending. Eccentric bracings reduce lateral stiffness and improve energy dissipation capacity. Steel bracings can be arranged like diagonal, cross bracing X, V, inverted V or Chevron as shown in figure 1.

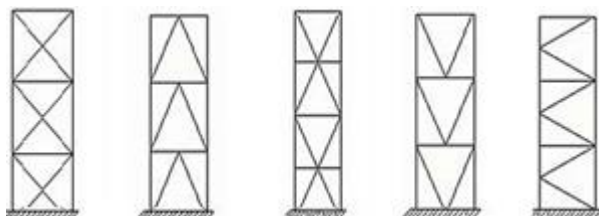


Figure 1: Different Types Of Bracings

## 2. Objectives

- To investigate seismic performance of a multi storey steel frame building.
- To analyze the steel frame with X bracing for different IS steel sections.
- To determine which section is more effective in resisting lateral loads.

## 3. Methodology


Response Spectrum method is employed.

### 3.1 Modelling of Building

The software ETABS has been used for the modelling. ETABS is an engineering software product that caters to multi-story building analysis and design. Basic or advanced systems under static or dynamic conditions may be evaluated using ETABS. For a sophisticated assessment of seismic performance, modal and direct-integration time-history analyses may couple with P-Delta and Large Displacement effects dynamic analysis, non-linear dynamic analysis and non-linear static pushover analysis, etc.

#### 3.1.1 Building Plan and Dimension Details


The steel frame used in this study are 10 storied with 6 m bays along longitudinal direction and 5 m bays along transverse direction as shown in figure 2. Table 1 shows the specification of G+9 storied commercial building located in seismic zone III.

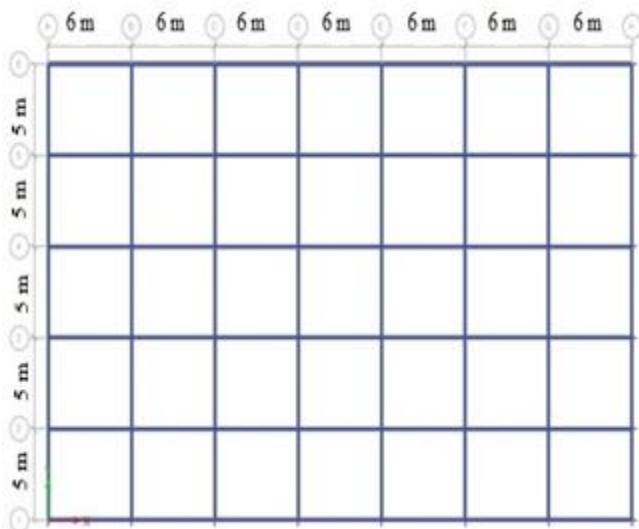

**Figure 2:** Plan of Building

**Table 1:** Details and dimension of the building models

Plan type	42 m × 25 m
Seismic Zone	III
Grade of reinforcing steel	Fe 415
Number of stories	10
Floor height	3.6 m
Beam size	ISWB 400
Column size	ISMB 200
Slab thickness	125 mm
Type of bracing used	X bracing
Bracing details	ISHB 150, ISHB 200, ISHB 225, ISHB 250 ISHB 300 ISM 150, ISM 175, ISM 200, ISM 225, ISM 250 ISA 100 × 100 × 10, ISA 110 × 110 × 10, ISA 130 × 130 × 10, ISA 150 × 150 × 10

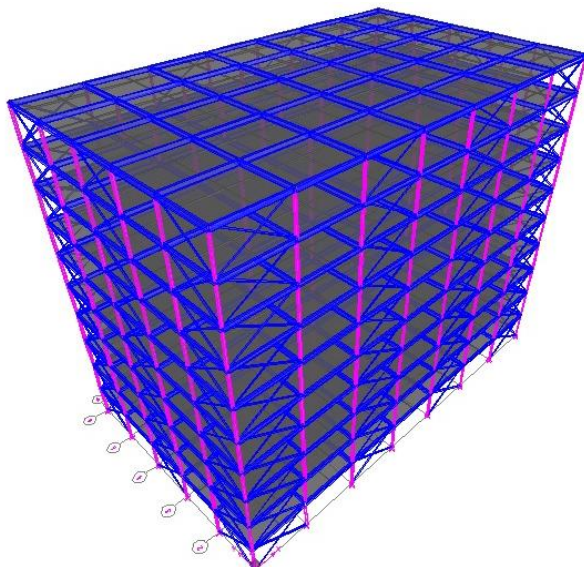

**Figure 3:** Three Dimensional View of Model

### 3.2 Load Formulation

Dead loads are considered as per IS 875 (Part I) – 1987 and steel tables & Live load IS 875 (Part II) -1987. Wind loads are considered as per IS 875 (Part III) - 1987 respectively. In addition to the above mentioned loads, dynamic loads in form of Response Spectrum method are also be assigned.

#### Live Load

##### Floor load:

Live Load Intensity specified (Public building) = 4kN/m<sup>2</sup>

Live Load at roof level = 1.5 kN/m<sup>2</sup>


#### Wind Load

Design wind speed  $V_z = V_b k_1 k_2 k_3 = 39 \times 1 \times 1.12 \times 1 = 43.68$  m/s

Design wind pressure  $P_z = 0.6 V_z^2 = 0.6 \times 43.68^2 = 1144.76$  N/m<sup>2</sup>

### Analysis

After assigning the loads to the structure, response spectrum analysis is done to evaluate dynamic results in form of storey shear, storey drift and maximum storey displacements. Response spectrum analysis is a procedure for calculating the maximum response of a structure when applied with ground motion. Each of the vibration modes that are considered are assumed to respond independently as a single degree of freedom system. Design codes (IS; 1893, Part 1) specify response spectra which determine the base acceleration applied to each mode according to its period.

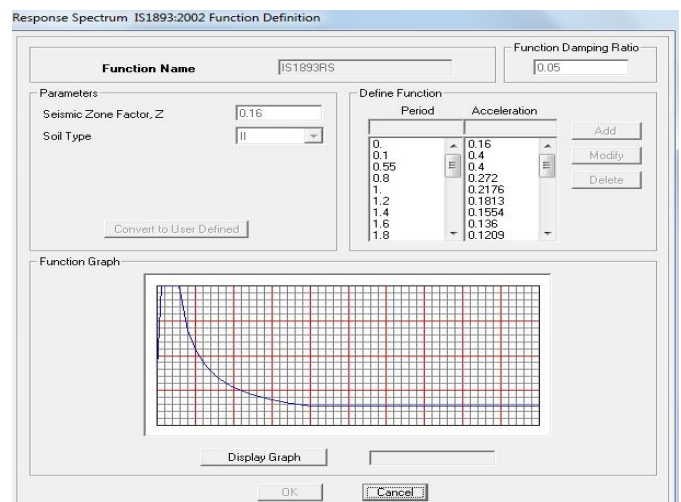

**Figure 4:** Response Spectrum IS 1893:2002 Function definition

## 4. Results and Discussion

After analysing the models various results are obtained. And these results are evaluated by preparing various graphs. The graphs are compared to understand the behaviour of building by increasing the size of bracing section and to determine which section is more effective in resisting lateral loads.

## 4.1 Storey Shears

### 4.1.1 ISA Section

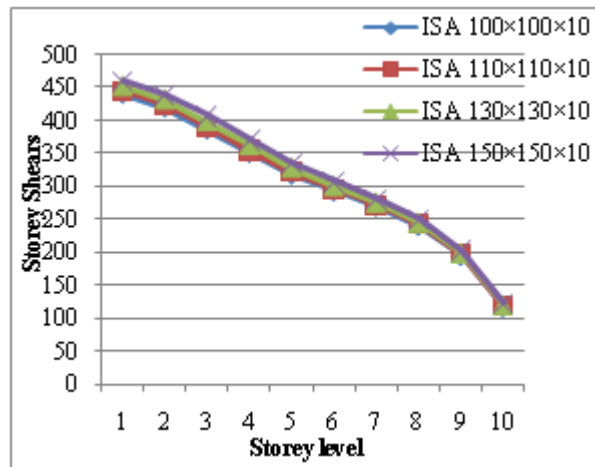


Figure 5: Storey shears of ISA section

### 4.1.2 ISHB Section

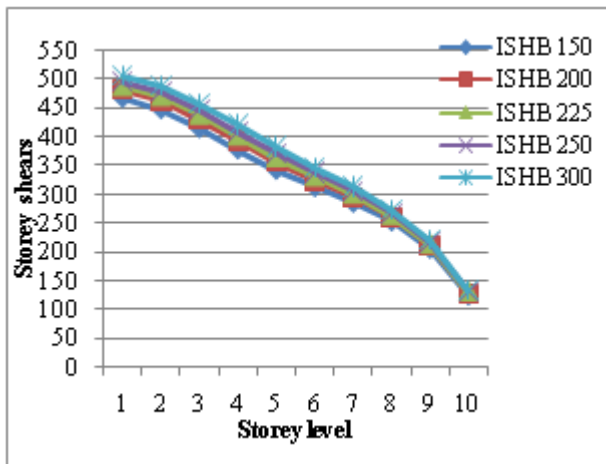


Figure 6: Storey shears of ISHB section

### 4.1.3 ISMC Section

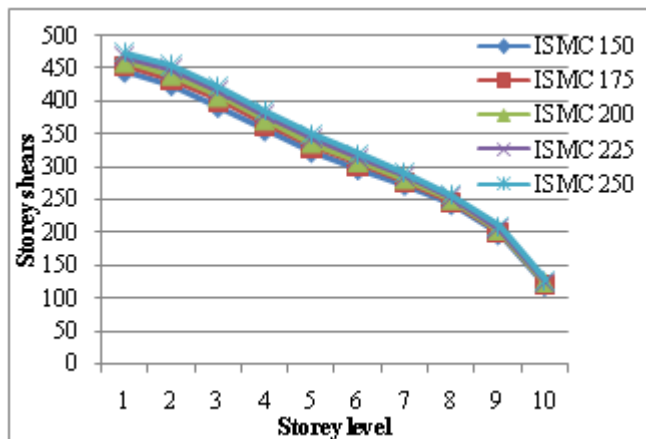


Figure 7: Storey shears of ISMC section

From figures 5,6&7 it is clear that as size of section increases storey shear increases. Also the value of shear decreases from

bottom storey to top storey, the maximum storey shear occurs at the base.

## 4.2 Joint Displacement

### 4.2.1 ISA Section

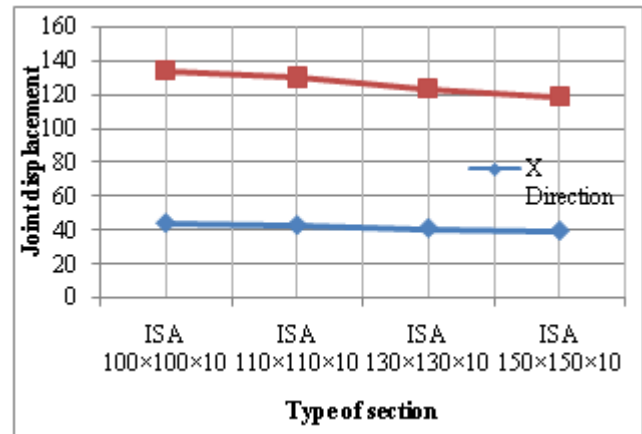


Figure 8: Joint displacement (mm) of ISA section in X and Y direction

### 4.2.2 ISHB Section

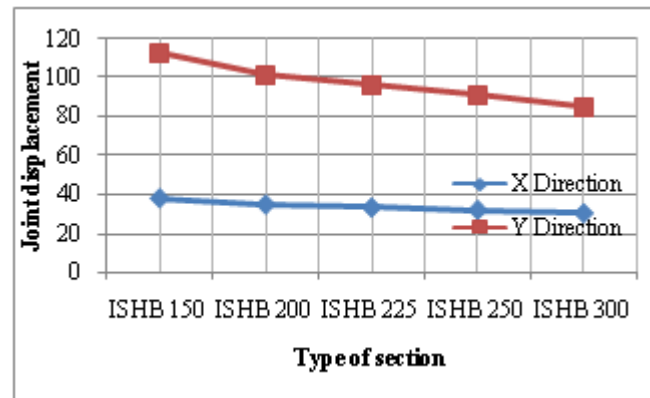


Figure 9: Joint displacement (mm) of ISHB section in X and Y direction

### 4.2.3 ISMC Section

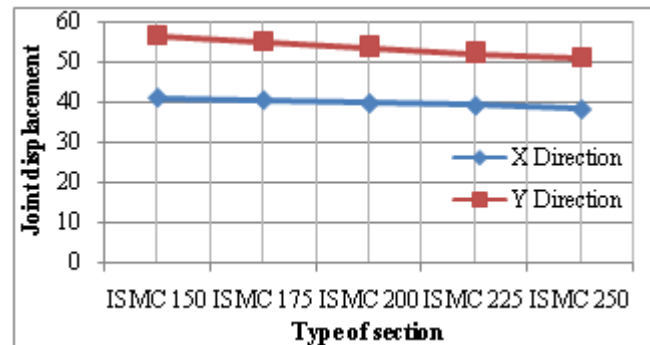


Figure 10: Joint displacement (mm) of ISMC section in X and Y direction

From figures 9,10&11 it is clear that as size of section increases joint displacement decreases in both X and Y direction.

### 4.3 Maximum Storey Drifts

#### 4.3.1 ISA Section

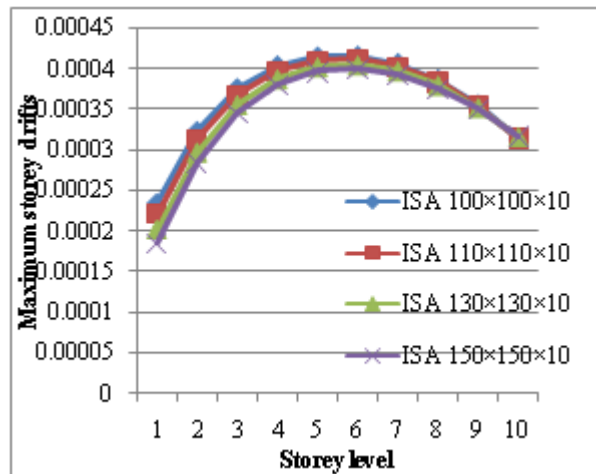


Figure 11: Maximum Storey Drifts of ISA Section

#### 4.3.2 ISHB Section

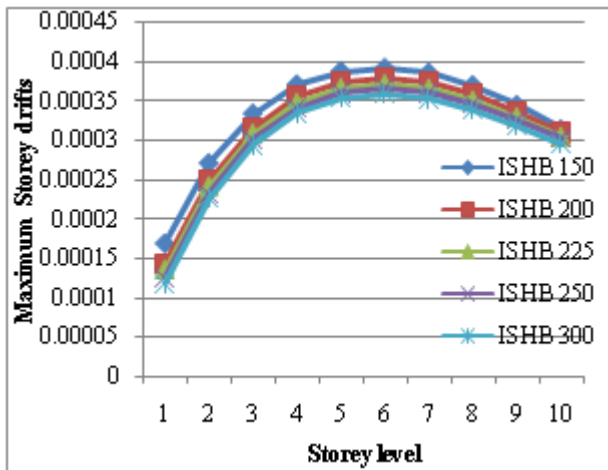


Figure 12: Maximum Storey Drifts of ISHB Section

#### 4.3.3 ISMC Section

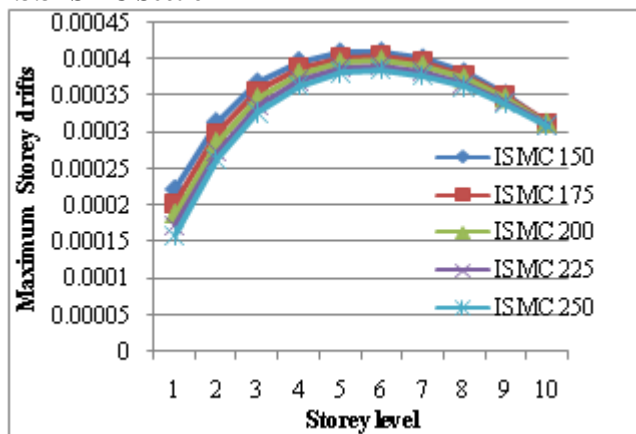


Figure 13: Maximum Storey Drifts of ISMC Section

From figures 11,12&13 it is found that as size of section increases maximum storey drift reduces and maximum storey drift occurs at 6th storey level.

### 4.4 Maximum Storey Displacements

#### 4.4.1 ISA Section

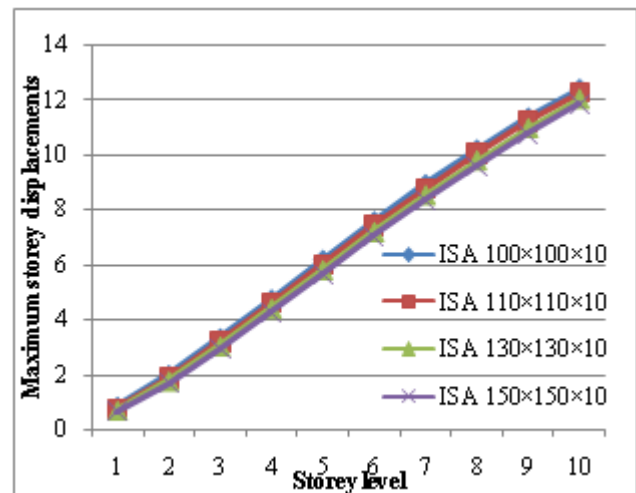


Figure 14: Maximum Storey Displacements of ISA Section

#### 4.4.2 ISHB Section

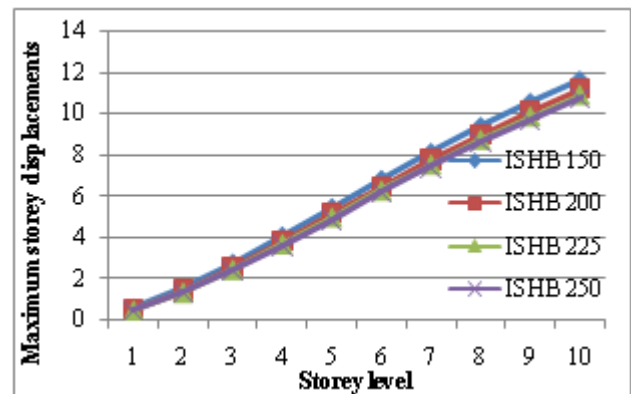


Figure 15: Maximum Storey Displacements of ISHB Section

#### 4.4.3 ISMC Section

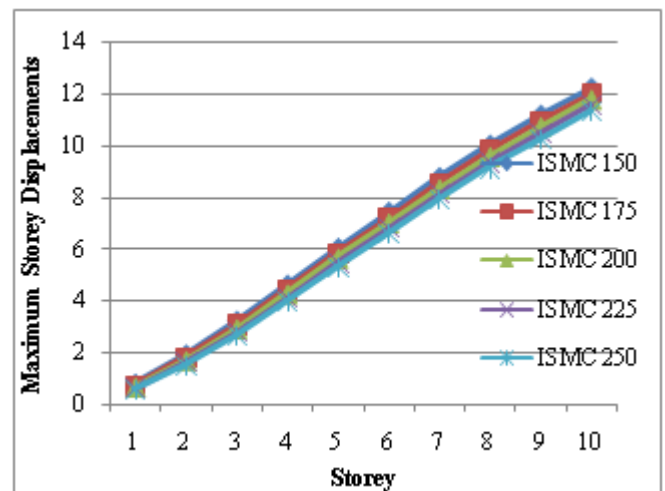


Figure 16: Maximum Storey Displacements of ISMC Section



From figures 14,15 &16 it is seen that as size of section increases values of maximum storey displacement decreases for ISA ,ISHB and ISMC sections.

**Table 2:** Comparison of Sections

Section	Storey shear (kN)	Joint displacement (mm)		Maximum Storey drifts	Maximum storey displacements (mm)
		X	Y		
ISA	460.24	39.5	119	0.00018	0.6675
ISHB	505.71	30.5	85	0.00012	0.4295
ISMC	474.58	38.2	51.16	0.00016	0.5761

From the table 2, it is clear that the value of storey shear is greater for ISHB section compared to ISA and ISMC sections. The value of joint displacement, maximum storey drifts, maximum storey displacements is minimum for ISHB section. Hence ISHB section is more effective.

## 5. Conclusions

The main conclusions obtained from the analysis of models are summarized below:

- As size of section increases the maximum storey displacements, maximum storey drifts, joint displacements decreases for ISA, ISHB and ISMC sections.
- The value of storey shear decreases from bottom story to top story for all the sections.
- The value of storey shear of ISHB section is 9.87% higher than that of ISA section and 6.55% higher than that of ISMC section.
- The value of joint displacement of ISHB section is 29.5% higher than that of ISA section and 20.15 % higher than that of ISMC section.
- The value of maximum storey drifts of ISHB section is 32.43 % higher than that of ISA section and 25 % higher than that of ISMC section.
- The value of maximum storey displacements of ISHB section is 35.6 % higher than that of ISA section and 25.446 % higher than that of ISMC section.
- ISHB section is found to have better performance.

## References

- [1] Mohd Mubeen, Khalid Nayaz Khan, Mohammed Idrees Khan, "Seismic Analysis Of Steel Frames With Eccentric Bracings Using Pushover Analysis " International Journal of Advanced Technology in Engineering and Science ISSN (online): 2348 – 7550 Volume No.03, Issue No. 06, June 2015.
- [2] Shachindra Kumar Chadhar, Dr. Abhay Sharma, "Seismic Behaviour Of Rc Building Frame With Steel Bracing System Using Various Arrangements" International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395 -0056 Volume: 02 Issue: 05 Aug-2015 p-ISSN: 2395-0072.
- [3] Arjun Mudkondwar, Dr. A. V. Patil, "Performance Analysis and Behavior of Steel Framed Building with reference to Variation in Bracing Type" International Journal of Modern Trends in Engineering and Research (IJMTER) Volume 02, Issue 04, [April – 2015] ISSN (Online): 2349–9745.
- [4] N.T. Bhagat, A. H. Deshmukh, , Nonlinear (Pushover) "Analysis of Steel frame with External Bracing". International Journal of Advanced Engineering and Nano Technology (IJAENT) ISSN: 2347-6389, Volume-2, Issue-5, April 2015.
- [5] Krishnaraj R .Chavan, H.S Jadhav, "Seismic response of RC building with different arrangement of steel bracing system" International Journal of Engineering Research and Applications ISSN : 2248-9622, Vol 4, Issue 7 (Version 3 ), July 2014, pp.218-222.
- [6] Zasiyah Tafheem, Shovona Khusru, "Structural behaviour of steel building with concentric and eccentric bracing: A comparative study" International Journal Of Civil And Structural Engineering, ISSN 0976 – 4399 Volume 4, No 1, 2013
- [7] IS: 800-2007 Indian Standard General Construction in Steel-Code of Practice.
- [8] IS 1893 (part 1 ): 2002, "Indian Standard Criteria For Earthquake Resistant Design Of Structures," Bureau Of Indian Standards, New Delhi.
- [9] IS : 875 ( Part 2 ) – 1987, "Indian Standard Code Of Practice For Design Loads (Other Than Earthquake) For Buildings And Structures Part 3 Imposed Loads".
- [10] IS : 875 ( Part 3 ) – 1987, "Indian Standard Code Of Practice For Design Loads (Other Than Earthquake) For Buildings And Structures Part 3 Wind Loads".

## Authors Profile

**Thasneem Yaseen I**, P.G student in Computer Aided Structural Engineering, Department of Civil Engineering, Sree Buddha College of Engineering, APJ Abdul Kalam Technological University, Kerala. Obtained Btech from Caarmel Engineering College, Ranni, Perunad under Mahathma Gandhi University, Kottayam in the year 2014.

**Linda Ann Mathew** , Assistant Professor, Department of Civil Engineering, Sree Budha College of Engineering, Pathanamthitta, APJ Abdul Kalam Technological University, Kerala.