

Designing of A Monitoring System for Kitchen Environment

Nagapuri Srilekha¹, P.Venkateshwarlu²

¹M.Tech Student, ECE, SVS Group of Institutions, Telangana, India

²Assistant Professor, ECE, SVS Group of Institutions, Telangana, India

Abstract: *The development and design of the wise monitoring and controlling system for kitchen atmosphere instantly continues to be reported within this paper. The machine can monitor the status of kitchen and send an e-mail and/or perhaps an alert SMS via GSM network instantly, when the conditions get abnormal, to some concerned government bodies cell phone. The ZigBee tool and ARM1176JZF-S microcontroller are utilized within the implementation of sensor module. The machine provides a complete, inexpensive, effective and easy to use method of real-time monitoring and handheld remote control of kitchen. The GSM is a superb option for this because of its extensive coverage. Since SMS is really a text based protocol, the most fundamental GSM systems might have an accessibility status from the products or make changes on these states. The machine primarily monitors kitchen atmosphere parameters for example light intensity, 70 degrees, fire recognition, motion recognition and LPG gas level, continues to be developed.*

Keywords: Kitchen environment, ZigBee device, LPG gas level, GSM systems, Sensor module, Mobile phone.

1. Introduction

Kitchen atmosphere monitoring is among the important measures to become carefully supervised in tangible-here we are at safety, security and luxury of individuals. Interaction using the embedded unit can also be an essential issue. The paper proposes a Raspberry pi based kitchen monitoring system through website with ZigBee based technology. We've designed and implemented a concise wireless sensor network with web capacity. The machine can monitor the status of kitchen and send email and/or perhaps an alert SMS via GSM network instantly to customers. The machine has got the capacity to manage through internet, where the topic of received email is read through the developed formula given into Raspberry pi and so the system reacts to the related instruction rich in security. Your kitchen monitoring system hereby reported, comprised of two components, wireless sensor models (WSNs) along with a wireless information unit (WIU) linked with a radio transceivers that enables the change in temperature, light intensity, motion recognition, fire recognition, LPG gas recognition data and applying a WSN that utilizes ZigBee technology. Embedded server describes import Server in the scene the computer monitor and control equipment, within the support of appropriate hardware platforms and software systems, transfer traditional monitor and control equipment into an online, possessed with TCP/IP protocol because the underlying communication protocol and Server technology since its core. The WIU has additionally a GPRS module to deliver the information through the public mobile network. Raspberry Pi continues to be selected because the processing unit of WIU, that is a single board computer produced by Cambridge College. The Pi continues to be very well-liked by the educational fraternity because of it's inexpensive. The Pi has HDMI support and it has an Sdcard slot for booting up because of insufficient BIOS along with a persistent memory. The embedded system may be used for everyone the embedded web documents, including dynamic and static details about embedded systems, to Internet browsers. This kind of server is known as an Embedded Server.

2. Methodology

Web-enabled systems have offered great promise to consumers. Their benefits are very well known. Decrease in operating and maintenance costs because of remote monitoring, diagnostics, debugging, and upgrading firmware. Remote monitoring of residential and industrial qualities, notification of emergency services in case of fireside, thievery, along with a leak of liquid or gas. The paper proposes a Raspberry pi based kitchen monitoring system through website with ZigBee based technology. The machine is modularly built, permitting different modules to become added. Additionally, it's flexible to support an array of measurement products with appropriate connects. It features a number of features for example energy-efficient, intelligence, inexpensive, portability and performance. Using the advancements in Internet technologies and Wireless Sensor Systems (WSN), a brand new trend within the era of ubiquity has been recognized. The paper proposes a Raspberry pi based kitchen monitoring system through website with ZigBee based technology. The machine can monitor the status of kitchen and send email and/or perhaps an alert SMS via GSM network instantly to customers. The machine has got the capacity to manage through internet, where the topic of received email is read through the developed formula given into Raspberry pi and so the system reacts to the related instruction rich in security. The virtual wise kitchen is really a software construct coded in python. All communication and directions are checked for safety and security, within the virtual atmosphere, before implementation within the real home atmosphere. The Raspberry Pi unit and also the connected sensors are set up in the home through ZigBee and also the threshold for that each analog input is configured. The remote measurement and controlling of home products on the internet could be mechanized by using certain network architectural design methods and using ZigBee communication standards. The information transmission of wise sensing products augmented with ZigBee on the internet can be achieved by integrating an online gateway with WSN ZigBee network. If

Volume 5 Issue 8, August 2016

www.ijsr.net

Licensed Under Creative Commons Attribution CC BY

the abnormality is thought, the Raspberry pi transmits a suitable SMS and/or email showing the status of supervised sensors for an Internet-based server using user email-id. The server then transmits a brief Messaging Service (SMS) message to the average consumer concerning the abnormality. The consumer can directly sign in and communicate with the embedded device instantly through website with no need to maintain yet another server. Inside a ZigBee network, finish products collect and forward data to some coordinator after which ZigBee protocol data format is converted to Ip address (IPV6) format through the gateway. In the introduction of kitchen monitoring system the ZigBee communication has been utilized.



Figure: An overview of login page

3. An Overview of Proposed System

The ZigBee system is a power efficient, high precision, self-configuring, inexpensive, communication technology. The communication between your sensor module and sink module is carried out back and forth inside a ZigBee module. Within this paper, we've selected the XBee S2 module that is focusing on the two.4 GHz band nevertheless its data transmits and receives serially. We've used five various kinds of sensors as sensing models for effective data management around the IoT systems. The warning measures the ecological conditioning values for example temperature, light intensity etc. Thus, the fabrications of various kinds of sensing models enable remote monitoring and controlling of household home appliances through IoT gateway and IoT application. The transformation of sensing information between your ZigBee and IPV6 network is performed with a program in the IoT application gateway, because the ZigBee network doesn't have the architecture to talk with internet methods. The IoT application gateway includes a program for changing ZigBee addresses and encapsulating data payloads within an ip address. The non-public area network ID is just like the developed sensor and sink modules. When the working from the setup is true, the network link between the sensor modules and sink node is instantly established. Every sensor transmits their data every 4s towards the coordinators so we used the unlicensed 2.4 GHz frequency band. A gas sensor getting used has high sensitivity to liquefied oil gas (LPG). This will make the sensor suitable for a kitchen. An indication conditioning circuit is design to interface the sensor to among the analog input from the ZigBee module. The sunshine sensor also communicates through ZigBee interface, selected for figuring out the sunshine intensity. The sensor outputs transformed into

digital value, that luminance or even the ambient light level in Lux, was calculated utilizing an empirical formula to approximate a person's eye response. The SMS module includes GSM modem along with a control program. The control program, GSM-dial-up and communication protocol are kept in the embedded gateway and also the GSM modem is attached to the Raspberry pi via serial interface towards the switching module. The SMS module functions as an interface between your embedded processor and also the GSM network, making the machine login towards the network and able to make data transfer and communication. The module takes the AT command from remote terminal or mobile products and transmits these to switching module through the GSM network. Fire sensor node is positioned in the kitchen area. The sensor can identify the fireplace and transmit the SMS and/or perhaps an email towards the base station while sounding the sensors simultaneously. The XBee-S2 modules produce sample packets that are converted through the application gateway to IPV6 User Datagram Protocol (UDP) packets and delivered to a web server. Command packets to manage the XBee-S2 modules are encapsulated within an UDP packet through the server, and converted through the IoT application gateway to ZigBee packets. The server was developed on the Raspberry pi development board in Linux atmosphere, which assists SLIP, TCP/IP, HTTP and also at Instructions methods. The net server Flash File System supports dynamically produced files that may include output data from transducers and hardware sources. Embedded Server Pages with sensors are produced while using following technique: HTML, JavaScript, PHP & SQLite. Dynamic HTML enables Customers to include Sensor data for their pages which are otherwise hard to achieve. To ensure that user can both control and take notice of the kitchen atmosphere. Utilization of JavaScript would be to make easy to use interaction with sensor to HTML. Pages Scripts take root in or incorporated from HTML pages and communicate with the database of kitchen monitoring system. Java scripts will also be employed for resizing data field of html pages and validate the input values. To be able to monitor and keep the health of the WSN it's important to get access to details about the particular network and also the communications between your different aspects of the network. Information for that setup from the system, deployment from the network, connectivity and longevity of the communication could be utilized in the developed Web interface from the network.

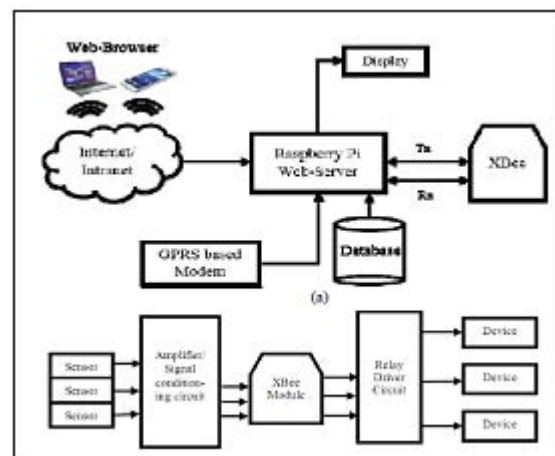


Figure: An overview of proposed system

4. Conclusion

This paper is definitely the design and also the implementation of the interactive kitchen monitoring system using the GSM, ZigBee communication and Web-enabled measurement and control systems. Changing PC with low-cost single nick processor could make managers to obtain parameters of various remote sensors and send control information to field equipments anytime through Internet. The GSM, E-mail and Internet based controlled duplex communication system supplies a effective making decisions device concept for adaptation to many wise kitchen situations. The entire product is guaranteed via a login E-mail and Website password based authentication. The look is totally wireless and integrated using the software to create a inexpensive, robust and simply operable system. ZigBee communication helps make the system simple to install. The concerned authority can control the machine through his cell phone by delivering AT Instructions to GSM MODEM or if you take the steps needed in user email that is password protected. Customers can monitor and control transducers on active WebPages enhanced with JavaScript and Java.

References

- [1] S. Mylvaganam, H. Waerstad, and L. Cortvriendt, "From sensor to webusing PLC with embedded web server for remote monitoring of processes," in Proc. 2003 IEEE Sensors, Oct. 22–24, 2003, vol. 2, pp.966–969
- [2] Hong-TaekJu, _ Mi-Joung Choi and James W. Hong "An efficient and lightweight embedded Web server for Web-based network elementmanagement" International Journal of Network Management, pp. 261 – 275, Oct 2000
- [3] S. Son, C. Lim, and N.-N. Kim, "Debugging protocol for remote cross development environment," in Proc. 7th Int. Conf. Real-Time Computing Systems and Applications, Cheju Island, South Korea, Dec. 12–14, 2000, pp. 394–398
- [4] T. Motylewski, "The industrial data-acquisition system with embeddedRt-Linux and network server technology," in Proc. Third Real-Time Linux Workshop, 2001. [Online]. Available: The Real Time LinuxFoundation:<http://www.realtimelinuxfoundation.org/events/rtlws-2001/papers.html>
- [5] A. Sanz, J. I. Garcia-Nicolas, and P. Estopinan, "A complete node forpower line communications in a single chip," in Proc. 2005 Int. Symp. Power Line Communications and its Applications, Apr. 6–8, 2005, pp.285–289
- [6] IEEE Standard for Information Technology-Telecommunications and Information Exchange Between Systems-Local and Metropolitan Area Networks, IEEE Standard 802.15.4-2003, 2003.
- [7] T. Lin, H. Zhao, J. Wang, G. Han, and J. Wang, "An embedded Webservice for equipment," in Proc. 7th Int. Symp. Parallel Architectures, Algorithms and Networks, May 10–12, 2004, pp. 345–350