

Investigation of Optical Gain of Type-I and Type-II Nano Hetrostructure

Vinay Kumar Singh

Assistant Proffesor, Zakir Husain Delhi College, New Delhi

Abstract: This paper deals the investigation of optical gain characteristics of a single quantum well of material composition $InGa_{0.76}N_{0.24}$ (Type-I) sandwiched between the barriers of material composition GaN. The structure is grown on GaN substrate and $In_{0.53}Ga_{0.47}As$ (Type-II) sandwiched between the barriers of material composition $GaAs_{0.51}Sb_{0.49}$. The structure is grown on InP substrate. Apart from optical gain, we have also investigate energy band structure along with valance and conduction band envelope functions and the comparative picture of the two hetrostructures (Type-I and Type-II) within two polarization i.e. Transverse electric(TE) and Transverse Magnetic(TM). The behavior of quasi Fermi levels for the valance and conduction band has also been investigated. For optical gain simulation, the hetrostructure has been modeled with the help of six band k.p method. The 6×6 diagonalized K.p Hamilton has been solved to evaluate the light and heavy hole energies. For the injected carrier density of $15 \times 10^{12}/cm^2$, the optimized optical gain is found $\sim 30320.21/cm$ at wavelength $0.93 \mu m$ and $\sim 12327.21/cm$ at wavelength $1.85 \mu m$ for Type-I and Type-II hetrostructures respectively.

Keywords: Optical Gain, Type-I and Type-II, TE and TM mode, Hetrostructures

1. Introduction

In the area of Optoelectronics, semiconductor hetrostructures play an important role. Since two decades, the III- V semiconductors based quantum well hetrostructure have been widely used for lasing applications [1]. Lasing hetrostructures offer the improved performance in the terms of long wavelength, High intense beam output and switching speed. Due to minimal inter-modal delay effects and minimal losses, hetrostructures semiconductors are very important for optoelectronic device applications [2-3]. For obtaining lasing, quantum well structure is most effective approaches. However, high carrier density is required for homogeneous quantum wells, to invert their population before any stimulated emission process. In this paper we investigate the Optical Gain of Type-I hetrostructure $InGaN/GaN$ and Type-II hetrostructure $InGaAs/GaAsSb$ which is capable of better carrier and optical confinement. P.A.alvi et al. have calculated the optimized optical gain with in TE mode $9000/cm$ at corresponding lasing wavelength of $1.95 \mu m$ under very high pressure [4]. The modal gain and optical losses have been studied within TE and TM modes by Rashmi Yadav et al. She also reported that maximum gain is achieved at the lasing wavelength $1.40 \mu m$ and $1.25 \mu m$ in TE and TM mode respectively [6]. In Recent Research, H.K Nirmal have studied that the various lasing characteristics like reffective index, differential gain and antiguiding factor in relation with the photonic energy with in TE and TM mode [7]. Emanuele et al. reported that Deep-UV optical gain in AlGaIn-Based Graded index separate confinement hetrostructure. He designed a graded Index laser double hetrostructure with AlGaIn in active region to enhance the optical confinement of hetrostructures [8]. In [9] Wei Guo have reported that stimulated emission and optical gain for 250 nm emission from an AlGaIn hetrostructure. Hongping Zhao et al. analyzed that improved gain media self consistently for Type-II $InGaN$ hetrostructure [10-11].

2. Device Structure

The proposed model have a Two hetrostructures i.e Type-I hetrostructure $InGaN/GaN$ and Type -II hetrostructure $InGaAs/GaAsSb$. For Type-I $InGaN/GaN$ hetrostructure, single quantum well of width 4 nm of ternary compound $InGaN$ sandwiched between the barrier layer of GaN of 6 nm . The whole hetrostructure has been grown on the substrate of binary compound GaN. For Type-II $InGaAs/GaAsSb$ hetrostructure, single quantum well of width 4 nm of ternary compound $InGaN$ sandwiched between the barrier layer of GaAsSb of 2 nm . The whole hetrostructure has been grown on the substrate of binary compound InP. Optical gain or material gain is the important properties of lasing hetrostructures which is explained in different polarizarion mode. $InGaAs/GaAsSb$ 'W' type lasers on substrate has been investigated in [13]. Chia-Hao Chang et al. investigated the optical gain for $InGaAs/GaAsSb$ quantum well hetrostructure [14-16]. Recently, Balie Chen et al. have reported the optimized wave function overlap and transition wavelength for $InGaAs/GaAsSb$ type-II quantum well hetrostructure [17]. For the calculation of discrete energy levels within the conduction band, the single band effective mass equation can be used as

$$-\frac{\hbar^2}{2m_c^*} \nabla^2 \Psi + V_c \Psi = E_c \Psi \quad (1)$$

where Ψ is the envelope function \hbar is plank's constant, m_c^* conduction effective mass, V_c potential of conduction band, E_c is conduction band electron energy level. For calculation of discrete energy levels (i.e. conduction electron and light and heavy hole levels) within the quantum well hetrostructure we have used 6×6 Hamilton matrix.

$$H_{6 \times 6}(k) = \begin{pmatrix} \mathbb{H}_{3 \times 3}^+ & 0 & \mathbb{0} \\ \mathbb{0} & \mathbb{H}_{3 \times 3}^- & \mathbb{0} \end{pmatrix} \quad (2)$$

where $\mathbb{H}_{3 \times 3}^+$ and $\mathbb{H}_{3 \times 3}^-$ can be expanded as (2) with $\mathbb{U} = +$ or $-$ represents upper and lower blocks.

Volume 6 Issue 4, April 2017

www.ijsr.net

Licensed Under Creative Commons Attribution CC BY

$$H_{3 \times 3}^U = - \begin{pmatrix} P+Q - V_h(Z) & R(k) \pm iS(k) & \sqrt{2}R(k) \pm \frac{i}{\sqrt{2}}S(k) \\ R(k) \pm iS(k) & P - Q - V_h(Z) & \sqrt{2}Q \pm i\sqrt{\frac{3}{2}}S(k) \\ \sqrt{2}R(k) \pm \frac{i}{\sqrt{2}}S(k) & \sqrt{2}Q \mp i\sqrt{\frac{3}{2}}S(k) & P + \Delta_{so} - V_h(Z) \end{pmatrix} \quad (3)$$

In (2) $V_h(Z)$ represents the unstrained valence band edge, Δ_{so} represents the spin-orbit split-off energy. Also $P = P(k) + P(\epsilon)$ and $Q = Q(k) + Q(\epsilon)$ is expanded in equations (4) and (5), also, $S(k)$ and $R(k)$ are expanded in equation (6)

$$P(k) = \frac{\hbar^2}{2m_0} \gamma_1 (k_x^2 + k_y^2) \quad (4a)$$

$$P(\epsilon) = -a_v (\epsilon_{xx} + \epsilon_{yy} + \epsilon_{zz}) \quad (4b)$$

$$Q(k) = \frac{\hbar^2}{2m_0} \gamma_2 (k_x^2 - 2k_z^2) \quad (5a)$$

$$Q(\epsilon) = -\frac{b}{2} (\epsilon_{xx} + \epsilon_{yy} - 2\epsilon_{zz}) \quad (5b)$$

$$S(k) = \frac{\hbar^2}{2m_0} \sqrt{\frac{3}{2}} \gamma_2 \frac{\epsilon_{xy}}{2} + \gamma_3 \frac{\epsilon_{yz}}{2} k_x^2 \quad (6a)$$

$$R(k) = \frac{\hbar^2}{2m_0} \sqrt{\frac{3}{2}} \gamma_3 k_x k_z \quad (6b)$$

For quantum well structures optical gain coefficient can be written as

$$G(E) = \frac{q^2 M_B^2}{E \epsilon_0 m_0^2 c n_{eff} W} \sum_{i,j} \int_{E_g}^{E_{gb}} m_{r,ij} C_{ij} A_{ij} (f_c - f_v) L(E - E') dE \quad (7)$$

Where E is the optical energy, q is the electron charge, n_{eff} the effective refractive index of the laser structure, w the width of the quantum well, i and j the conduction band and valence band quantum numbers, C_{ij} is the spatial overlap factor, ϵ_0 permittivity, M_B^2 bulk momentum.

3. Results and Discussion

Fig 1 and fig 2 shows the wavefunction waveform for the Type-I and Type-II heterostructure respectively which shows the expected conduction and valence band alignment. To know the valence subbands energy level six band hamilton is used.

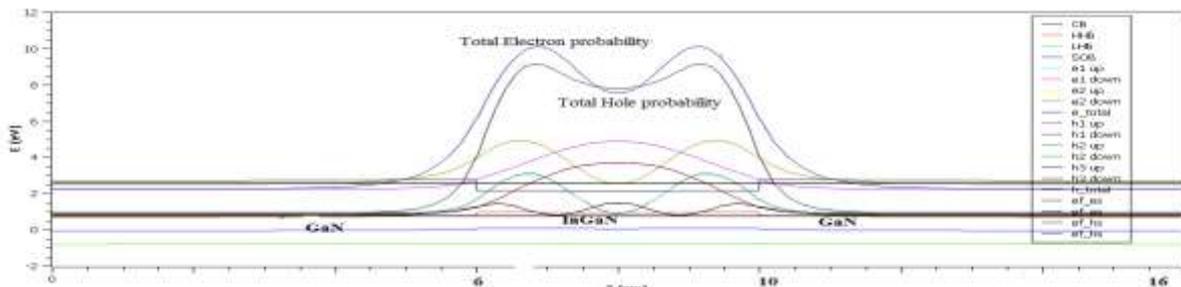


Figure 1: Wavefunction waveform for Type-I heterostructure InGaN/GaN

From the figure 1 it is clear that electron confinement at the quantum well is good as compared to hole confinement for type-I heterostructure.

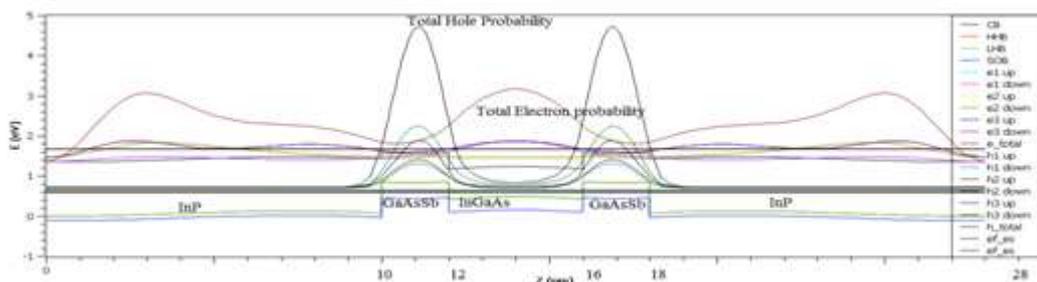


Figure 2: Wavefunction waveform for Type-II heterostructure InGaAs/GaAsSb

But figure 2 shows the hole confinement at quantum well is good as compared to electron confinement for type-II heterostructure.

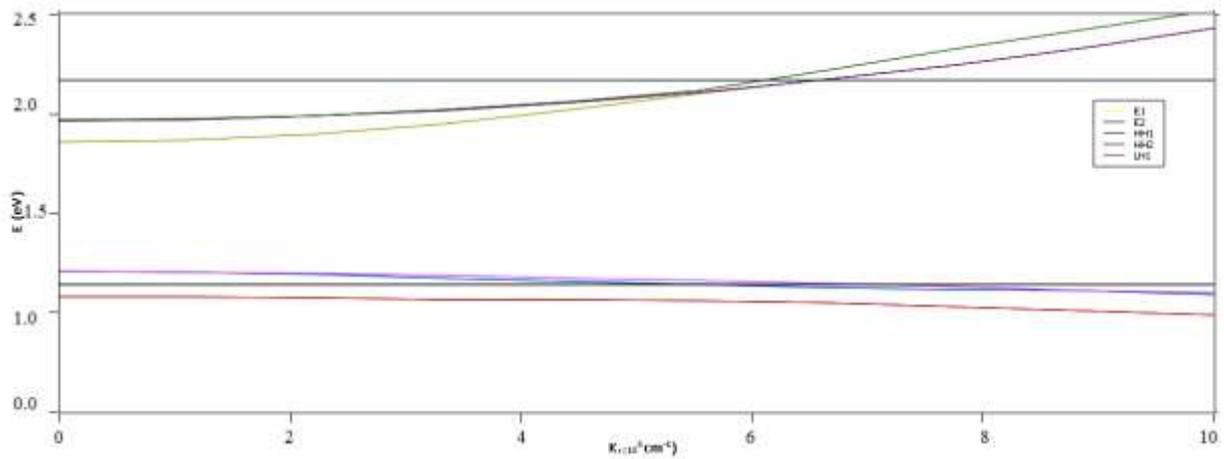


Figure 3: Conduction and valance band dispersion profiles for Type-I hetrostructure InGaN/GaN at 300K

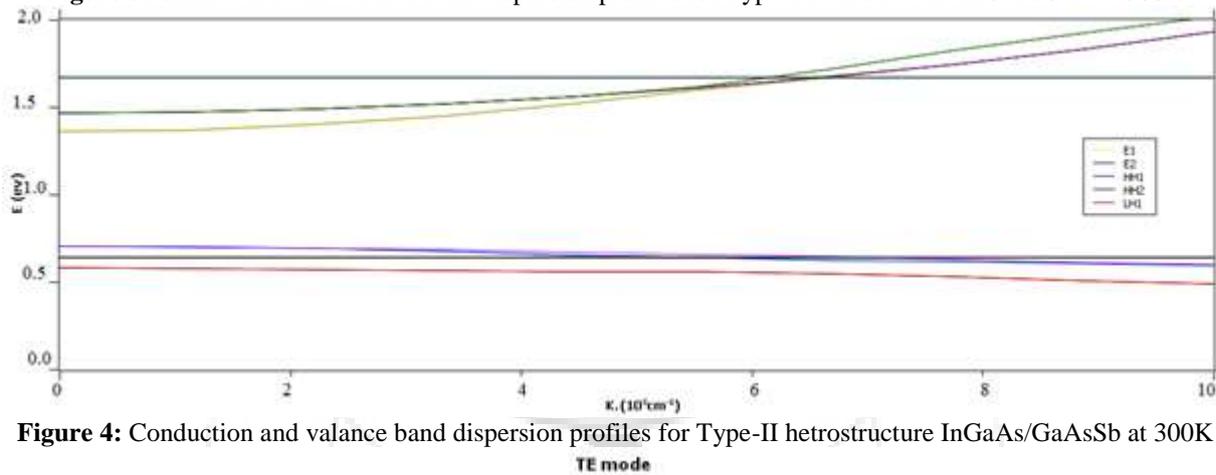


Figure 4: Conduction and valance band dispersion profiles for Type-II hetrostructure InGaAs/GaAsSb at 300K

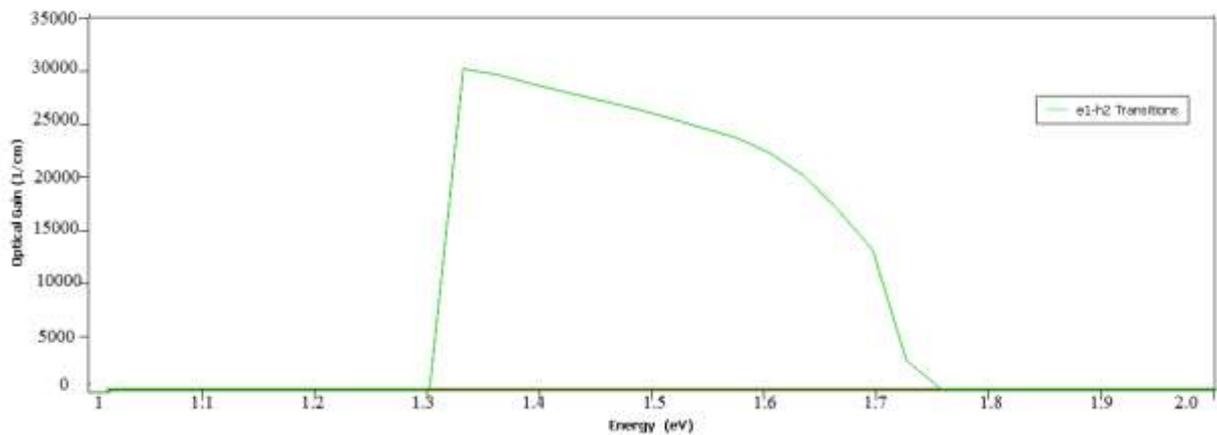


Figure 5: Optical gain as a function of photon energy for Type-I hetrostructure InGaN/GaN at 300K

In TE mode for Type-I hetrostructure $\text{InGa}_{0.76}\text{N}_{0.24}$ the optical gain is found for e1-h1 transition is $\sim 4.961/\text{cm}$ (not shown in waveform) at corresponding lasing wavelength $0.775\mu\text{m}$, for e1-h2 transition is 30320.21 at corresponding

lasing wavelength $0.93\mu\text{m}$. By observation it is found that the optical gain is negligible in e1-h1 transition as compared to e1-h2 transition.

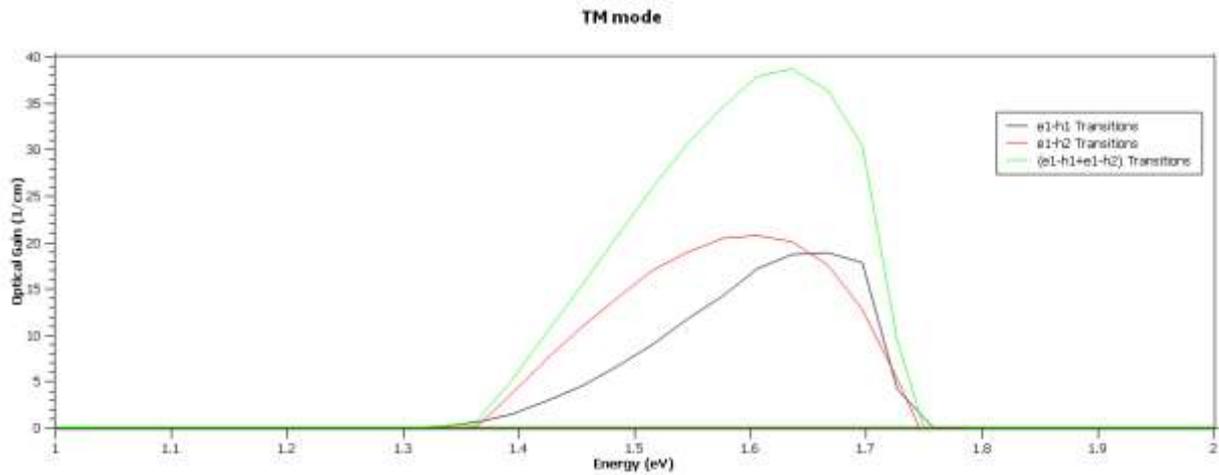


Figure 6: Optical gain as a function of photon energy for Type-I heterostructure InGaN/GaN at 300K

From figure 6 it is observed that the optical gain for Type-I InGaN/GaN heterostructures in TM mode is $\sim 18.8933/\text{cm}$ at corresponding lasing wavelength $0.74 \mu\text{m}$ for e1-h1 transition and $\sim 20.6839/\text{cm}$ at lasing wavelength $0.77 \mu\text{m}$ for e1-h2 transition. The total (e1-h1+e1-h2) optical gain is $\sim 38.6765/\text{cm}$ at corresponding wavelength $0.76 \mu\text{m}$. By observation it is clear that the maximum optical gain is found in TE mode for Type-I InGaN/GaN heterostructure.

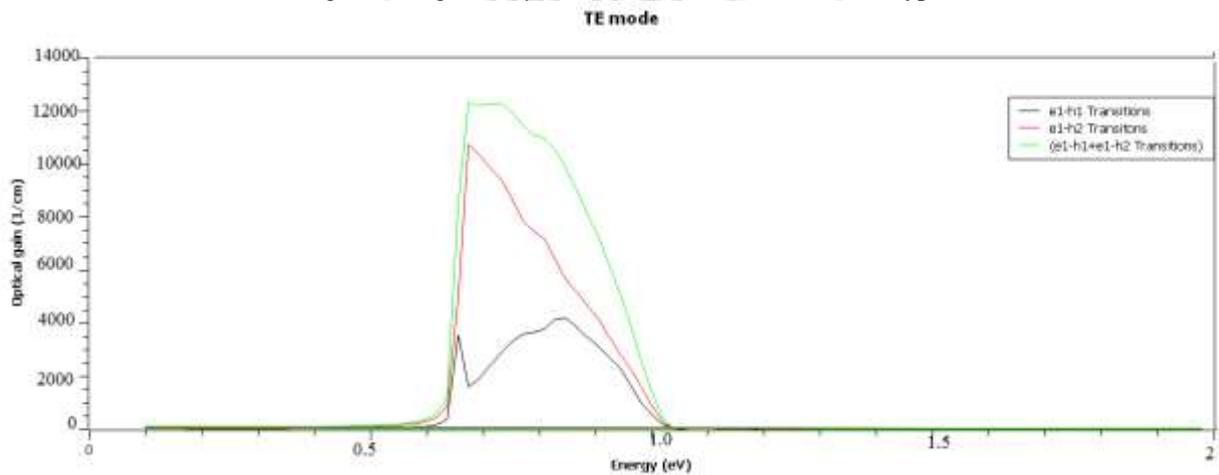


Figure 7: Optical gain as a function of photon energy for Type-II heterostructure InGaAs/GaAsSb at 300K

For Type-II heterostructure InGaAs/GaAsSb the optical gain is found $\sim 4193.308/\text{cm}$ at corresponding wavelength $1.47 \mu\text{m}$ (e1-h1 transition) and $\sim 10741.74/\text{cm}$ at corresponding wavelength $1.85 \mu\text{m}$ (e1-h2 transition). The total optical gain is $\sim 12327.2/\text{cm}$ at corresponding wavelength $1.85 \mu\text{m}$ (e1-h1+e1-h2 transition). From the figure it is concluded that the optical gain is less for e1-h1 transition as compared to e1-h2 transition.

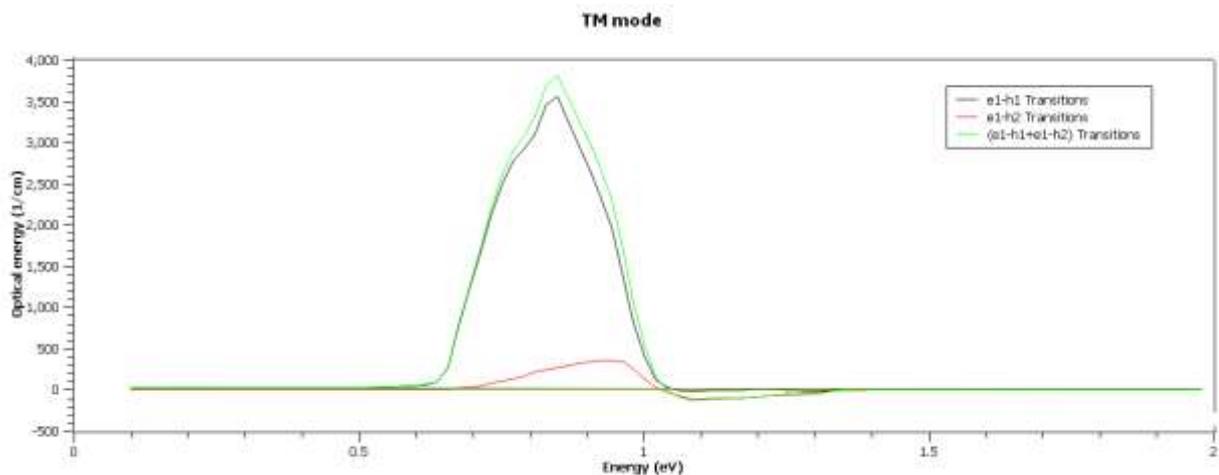


Figure 8: Optical gain as a function of photon energy for Type-II heterostructure InGaAs/GaAsSb at 300K

For e1-h1 transition (Type-II heterostructure InGaAs/GaAsSb) optical gain is found ~ 3555.16/cm at corresponding lasing wavelength 1.47 μm and for e1-h2 transition the optical gain is ~ 347.10/cm at corresponding lasing wavelength 1.34 μm . The total optical gain is found ~ 3819.18/cm at corresponding lasing wavelength 1.47 μm . From figure 7 it is clear that the maximum optical gain is achieved for e1-h1 transition. In TE mode type-II heterostructure the maximum optical gain is found for e1-h2 transition whereas in TM mode type-II heterostructure the maximum optical gain is found for e1-h1 transition which is the just reverse case from the TE mode.

4. Conclusions

We have investigated that Optical Gain of the two heterostructures i.e. Type-I and Type-II heterostructures. For the type-I heterostructure maximum optical gain is found ~ 30320.21/cm at photonic energy 1.333eV within TE mode whereas in Type-II heterostructure maximum optical gain is found ~ 12327.21/cm at photonic energy 0.675eV within TE mode. On the behalf of comparative study of both the Type-I and Type-II heterostructures, it is suggested that Type-I heterostructures is better than type-II heterostructure due to its maximum optical gain.

By the investigation of both heterostructures Type-I and Type-II we found that maximum optical gain is obtained in Type-I heterostructure within TE mode.

References

- [1] Rashmi Yadav, Pyare Lal, P.A. Alvi. "Well width Effects on material gain and lasing wavelength in InGaAsP/InP Nano-Heterostructure" Journal of Optoelectronics Engineering, 2014, Vol.2, No.1, 1-6
- [2] Vibha Kumari, Ashish, H.K Nirmal, Amit Rathi, P.A. Alvi "Optical Gain of InGaAlAs quantum well with different Barriers, Cladding and substrates" Journal of Optoelectronics Engineering, 2014, Vol.2, No.2, 42-45
- [3] Swati Jha, Meha Sharma, F.Rahman, P.A.Alvi "Analysis of strained $\text{Al}_{0.15}\text{In}_{0.22}\text{Ga}_{0.63}\text{As}/\text{GaAs}$ Graded Index-Separate Confinement Lasing Nano-heterostructure" Journal of Optoelectronics Engineering, 2015, Vol.3, No.1, 1-6
- [4] Nirmal, H. K., Nisha Yadav, S. Dalela, Amit Rathi, M. J. Siddiqui, and P. A. Alvi. "Tunability of Optical Gain (SWIR region) in Type-II $\text{In}_{0.70}\text{Ga}_{0.30}\text{As}/\text{GaAs}_{0.40}\text{Sb}_{0.60}$ Nano-heterostructure under High Pressure." Physica E: Low-dimensional Systems and Nanostructures (2016).
- [5] H.K Nirmal, Nisha Yadav, F.Rahman, P.A. Alvi "Optimization of high Optical gain in type-II $\text{In}_{0.70}\text{Ga}_{0.30}\text{As}/\text{GaAs}_{0.40}\text{Sb}_{0.60}$ lasing nano-heterostructure for SWIR applications" Superlattices and microstructures 88 (2015) 154-160
- [6] Rashmi yadav, Meha Sharma, swati jha, F.Rahman, S Dalela, P.A. Alvi "Investigation of Gain characteristics of GRIN- InGaAsP/InP nano-heterostructure" Indian journal of Pure & Applied Physics Vol.53, July 2015, pp.447-455
- [7] H.K Nirmal, Swati Jha, Meha Sharma, Pyare Lal, P.A. Alvi "Computational Analysis of optical gain characteristics of $\text{Al}_{0.15}\text{In}_{0.22}\text{Ga}_{0.63}\text{As}/\text{GaAs}$ Nano Heterostructure" Applied Science Letters 2(1)2016, 12-18
- [8] Emanuele Francesco Pecora, Haiding sun, Luca Dal Negro, Theodore D. Moustakas "Deep UV optical gain in AlGaIn based Graded index separate confinement heterostructure" Optical Material Express 809, Vol 5, No.4 March 2015
- [9] Wei Guo, Zachary Bryan, Ronny Kirste "Stimulated emission and Optical Gain in AlGaIn heterostructures grown on bulk AlN Substrates" Journal of Applied physics March 2014
- [10] Ruijiang Wang, Stephan Sprengel, Muhammed Munneeb, Gunther Roelkens "2 μm wave length range InP based type-II quantum well photodiode heterogeneously integrated on silicon photonic integrated circuits" Optics Express 26835, Vol 23, NO-20 Oct 2015.
- [11] Hongping Zhao, Ronald A. Arif and Nelson Tansu "Self consistent gain analysis of type-II 'w' InGaIn-GaN quantum well lasers" journal of Applied Physics 104, 043104(2008).
- [12] Huseyin Toktamis, Besire Gonul, Murat Oduncuoglu "Comparative study of the Band-offset ratio of conventionally strained and strain compensated InGaAs/GaAs QW lasers" Physica E 24(2004) 183-186.
- [13] Chang, Chia-Hao, Zong-Lin Li, Hong-Ting Lu, Chien-Hung Pan, Chien-Ping Lee, Gray Lin, and Sheng-Di Lin. "Low-Threshold Short-Wavelength Infrared InGaAs/GaAsSb 'W'-Type QW Laser on InP Substrate." Photonics Technology Letters, IEEE 27, no. 3 (2015): 225-228.
- [14] Chang, Chia-Hao, Zong-Lin Li, Chien-Hung Pan, Hong-Ting Lu, Chien-Ping Lee, and Sheng-Di Lin. "Room-temperature mid-infrared 'M'-type GaAsSb/InGaAs quantum well lasers on InP substrate." Journal of Applied Physics 115, no. 6 (2014): 063104.
- [15] Pan, C. H., and C. P. Lee. "Design and modeling of InP-based InGaAs/GaAsSb type-II 'W' type quantum wells for mid-infrared laser applications." Journal of Applied Physics 113, no. 4 (2013): 043112.
- [16] Pan, Chien-Hung, Chia-Hao Chang, and Chien-Ping Lee. "Room Temperature Optically Pumped 2.56- μm Lasers With 'W' Type InGaAs/GaAsSb Quantum Wells on InP Substrates." Photonics Technology Letters, IEEE 24, no. 13 (2012): 1145-1147.
- [17] Chen, Baile, A. L. Holmes, Viktor Khalfin, Igor Kudryashov, and Bora M. Onat. "Modeling of the type-II InGaAs/GaAsSb quantum well designs for mid-infrared laser diodes by k \cdot p method." In SPIE Defense, Security, and Sensing, pp. 83810F-83810F. International Society for Optics and Photonics, 2012.