

Control of Wind Turbine with Induction Generators

Surendra Singh Bhandawat¹, Hari Singh²

¹Department of M. Tech (Dual Degree) Electrical + Energy Engineering, Suresh Gyan Vihar University, Jaipur, Rajasthan, India

²Assistant Professor, Department of Electrical Engineering, Suresh Gyan Vihar University, Jaipur, Rajasthan, India

Abstract: The as of late expanding of vitality requests from Asian nations and world face the issue of vitality because of numerous undesired impacts; Primary, the world economy depends on non-renewable energy sources and predominantly oil costs have twofold in most recent five years and Optional, ecological dangers and ozone harming substance impacts are expanding then we need to concentrated on the sustainable power source like wind vitality. This paper gives the controlling of twist turbine with acceptance generators interfaced to lattice with power gadgets converters is best for the wind turbine control in light of the fact that the acceptance generators gives consistent recurrence and voltage to framework with control gadgets converter innovation. It additionally enhances the power execution of the wind control turbines for matrix since it lessens the all music and clamor from the framework. In this venture, utilizing of PWM innovation with transformer topology to change over DC voltage to Air conditioning voltage to matrix, reenactment of wind turbine interfaced to enlistment generators by utilization of variable speed dc engines, consolidating power yield of acceptance generators to charge regular dc transport bar and furthermore utilizing criticism component to detect yield air conditioning voltage and control by PWM innovation with obligation cycle rectification.

Keywords: microcontroller, wind generator, induction generators, induction motor, MOSFETs etc

1. Introduction

The as of late expanding of vitality requests from Asian nations and world face the issue of vitality because of numerous undesired impacts. Essential, the world economy depends on petroleum derivatives and for the most part oil costs have twofold in last five a long time, expanding the cost of oil from 60USD/barrel in 2008 to 110USD/barrel in the start of 2014.in extra, this is an estimate that the petroleum products will in any case be accessible in 2030 to 2050.but because of awkwardness between vitality supply what's more, vitality request that will in the long run prompt weariness of non-renewable energy sources and these issues could prompt a higher monetary emergency. Auxiliary, ecological dangers and ozone harming substance impacts are expanding then sustainable power source is the best choice to diminish these issue like wind vitality, sun based vitality and so forth this framework is extraordinarily made for the wind vitality to controlling of twist turbine with enlistment generators interfaced to matrix with power hardware converters


2. Literature Survey

From this paper, the electrical vitality utilization risingas of late and expanding the vitality request of energy limit. The

power conveyance, creation and utilizing of vitality ought to be new innovation productive hardware, which are spare the vitality from distributor to end clients. In this paper, examined about the power electronic applications for the wind turbines innovation and this paper gives the present day control hardware innovation has been produced Furthermore, got with quickly. The power hardware applications use in different wind turbine control producing frameworks, seaward wind ranches and furthermore demonstrating that the execution of wind turbines and change of the wind turbines execution by utilizing power electronic innovation. The power hardware innovation haspossessed the capacity to add to the voltage control and recurrence by methods for receptive power control and dynamic power control. This paper likewise gives the power filtering of this wind turbines and it is imperative to decrease the vitality cost level of the wind turbine control producing frameworks.

3. Experimental Setup

The aim of this experiment is to use the Wind energy as an power source because nowadays the demand of fossil fuel is become gradually increased and other sources are on hike such oil price and non-conventional sources of energy.

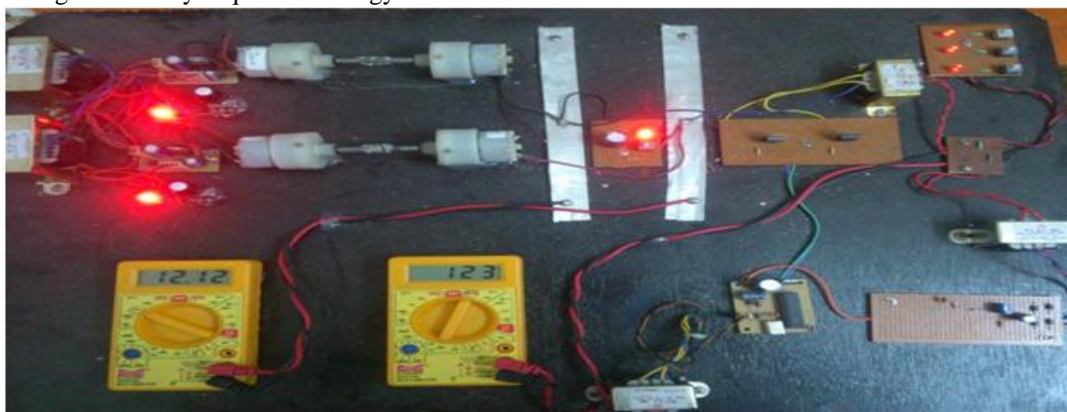

Volume 6 Issue 4, April 2017

www.ijer.net

Licensed Under Creative Commons Attribution CC BY

4. Methodology

In this paper, we have talked about the working of this framework from beginning the framework takes control from air conditioning primary supply and it changes over air conditioning to dc control with the help rectifier, which is changed over air conditioning to dc voltages for the variable speed dc engine and the rates of engines can be changed from varieties of variable resistors. Dc engine takes control shape mains and keeps running as a variable wind turbine and dc engines are associated with dc acceptance generators with help of shaft of dc engines. Both Dc Generators creates dc 12V voltage, which are associated in arrangement to consistent dc transport bar and transport bar's voltage associated with Digital Multi Meter which is indicating 12V dc. The transport bar's certain terminal is associated with transformers and different terminals of this transformer are associated with microcontroller for the controlling of air conditioning voltage with the assistance of MOSFET IRF540. The progression up transformer helps the 12V dc to 220V air conditioning voltages, which is appearing on the Digital Multi Meter. Again venture up transformer is associated with venture down transformer AC voltage 220v to 12V voltage DC and this 12v dc voltage is associated with PIC16F73 microcontroller's port PA0 with the assistance of potential divider and variable resistors for the assurance of microcontroller and this voltage again associated with MOSFET to venture up transformer to lattice with the assistance of energy hardware converters. The control gadgets converters most productive gadget for the wind control transformation framework and in this venture capacitors are utilized for the filling in as a channels and diminishments of clamor of this framework. In this framework or venture we have additionally utilized input component to detect AC yield voltages and control by PWM innovation with obligation cycle rectifications. The recreation of wind turbine interfaced to acceptance generators by utilization of variable speed DC generators and the square graph of the controlling wind turbines with enlistment Generators interfaced to Grid with power gadgets a framework, which is appeared in beneath.

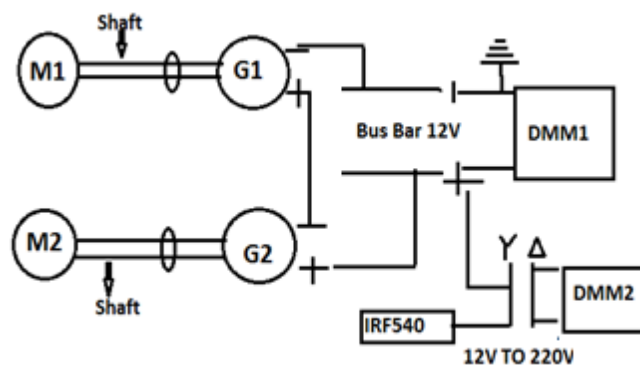


Figure 1: Block diagram of this system

5. Waveform and Discussion

Yield Waveform and Discussion of Control of Wind Turbine with Induction Generators Interfaced to Grid With Power Electronics Converters with PWM Innovation This part gives the waveform and examination of control of twist turbine with enlistment generators interfaced to framework with power hardware converters and furthermore give the obligation cycle waveform which was taken from the CRO with heartbeat with-balance PWM method. In the first place, we have taken chart between the voltages versus time in seconds from PWM changing gadget to controlling over stacking condition and variety of obligation cycle demonstrate the change of voltage with time for the better places or distinctive conditions.

Conditions 1

In this condition, we have taken both Generators of the voltage which are associated in arrangement and every generator furnishes voltage 7.110v with obligation cycle is 8.6%. both generators gives 12V in arrangement association and they are moving with help of dc engines which are associated with the shaft and these engines are variable dc engines, the speed of this engine can be fluctuated with the assistance of variable resistors also, engines takes control from mains supply which is AC voltage however it is venturing around venture down transformer furthermore, it is changed over air conditioning voltage to dc voltage with the assistance of rectifiers. The waveform of this condition appeared in beneath.



Figure 2: Voltage of the each dc generators

Condition 2

In this condition we taken voltage of transport bus which is 12.9V and these voltages originates from both dc generators which are associated in arrangement and furthermore the

rate of obligation cycle with the regard of time. The waveform of this condition appeared in beneath.

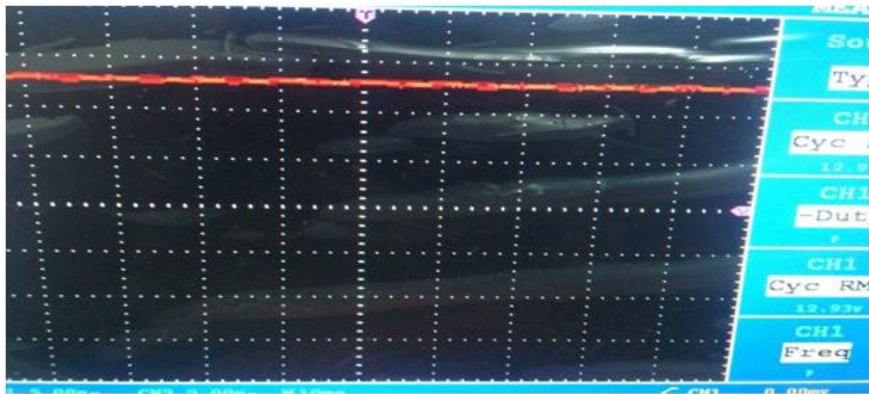


Figure 3: Voltage of the bus bar

Condition 3

In this condition we have taken rms voltage of stacking which is taking more voltages and the voltage is one single

stack 2.609V and obligation cycle of this condition 74.9% and recurrence of this condition 50.13. The wave type of this condition appeared in underneath.



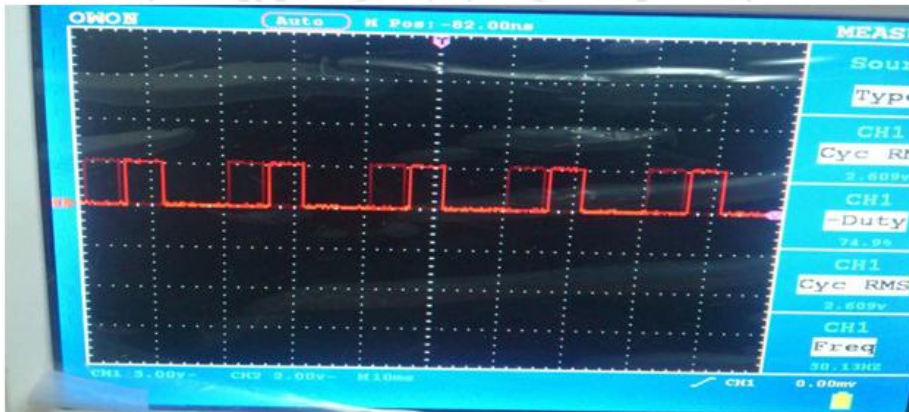


Figure 4: Voltage of load of this system


6. Simulation Report

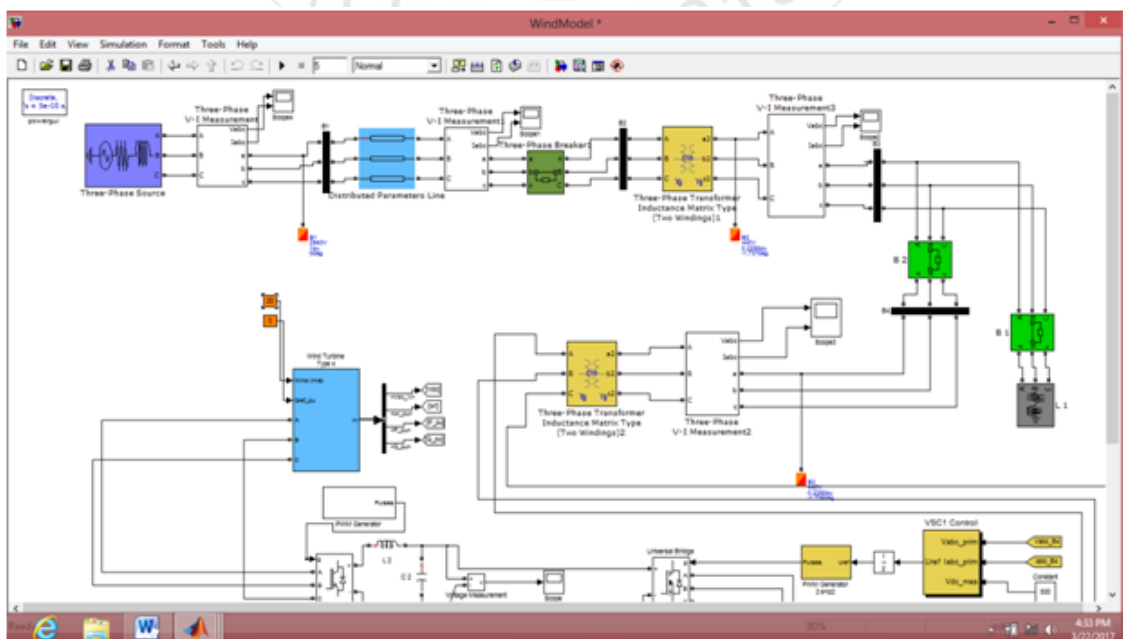

When the wind speed is 15 m/sec. The load is $1e3$ When the capacity of wind turbine is 15500.
graph of injected power and output dc is shown below.

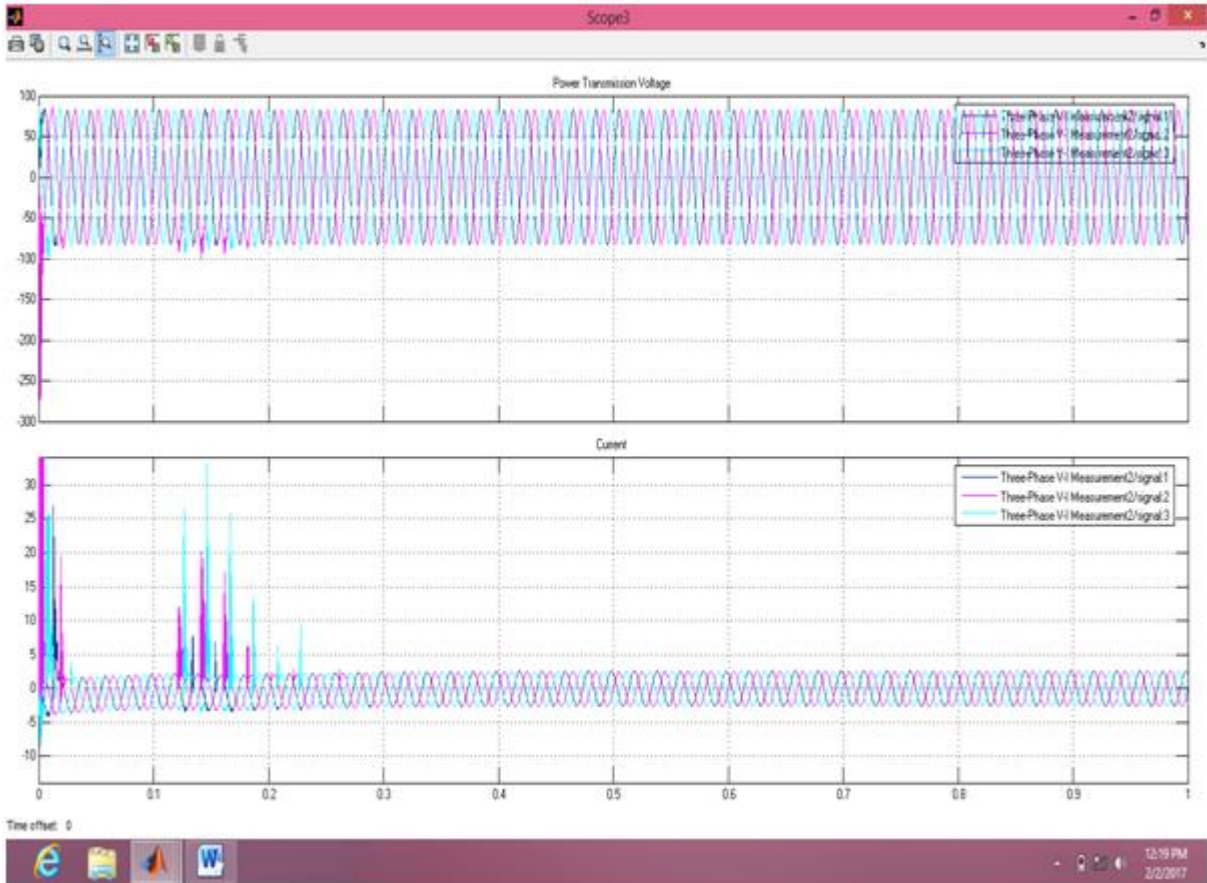

Injected power

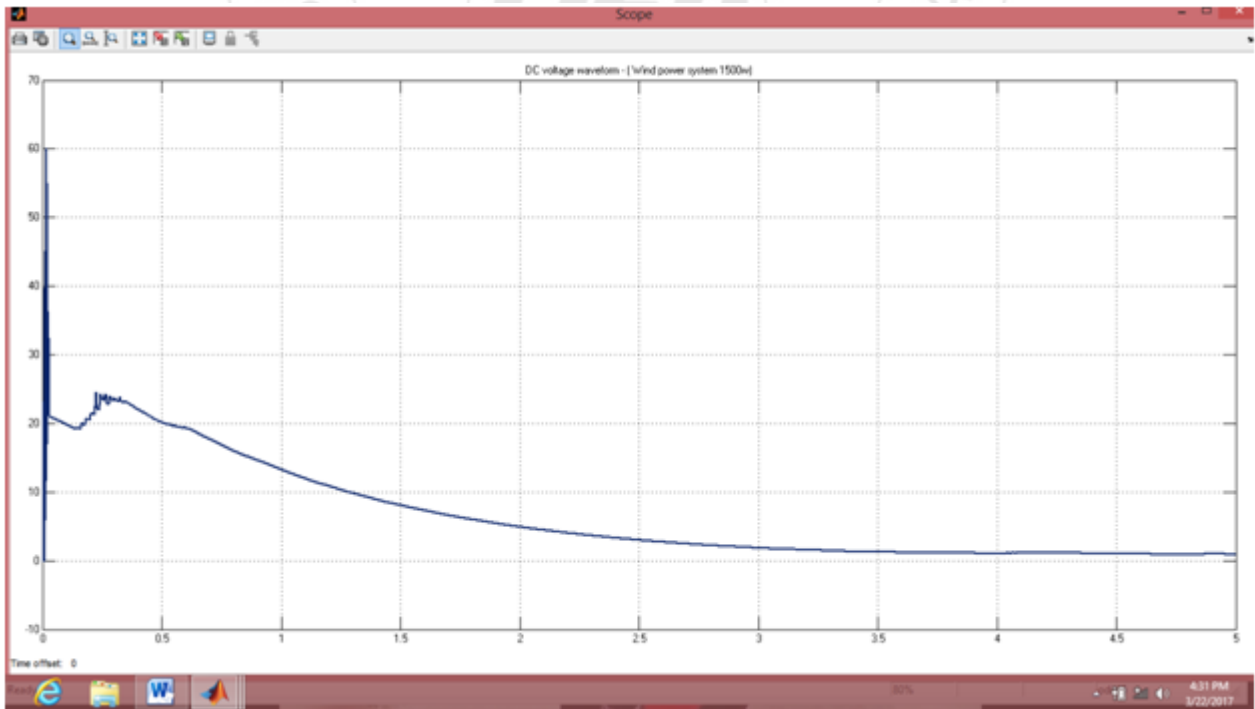

D.C graph

7. Result

This paper gives the outcomes from all above waveform and exchanges; we have found the aftereffects of control of wind turbine with enlistment generators interfaced to network with control gadgets converters are the best for development of execution of wind power turbine on the grounds that the power electronic converter innovation decrease the sounds and commotion of this framework. The variable speed acceptance generators give steady voltage on the transport bar and the DC voltage appear on the Digital Multi Meter and the positive terminals of transport voltage is associated with transformer and produces air conditioning 220V for the framework with lessening of commotion from line. The air conditioner voltage of framework is show on the Digital Multi Meter which is associated with load with the assistance of switch and the microcontroller controlling the voltages and recurrence of this framework. We have taken wave type of this framework with the assistance of PWM innovation with CRO and it demonstrates the voltage, obligation cycle and recurrence of this framework with deference to time. The power hardware converter likewise gives the input instrument to detect the yield air conditioning voltage and it is controlled by PWM innovation with obligation cycle revision. Every one of these clamors and sounds of energy supplies are controlling and lessening by microcontroller with the assistance of other power gadgets gear. Along these lines, this framework is the best for the wind control turbines to network.

8. Conclusion

This paper gives the conclusion from all above waveform, dialogs and results; we have found the finishes of control of twist turbine with enlistment generators interfaced to lattice with power gadgets converters is best for the wind turbine control in light of the fact that the acceptance generators gives consistent recurrence and voltage to matrix with power hardware converter innovation. It additionally enhances the power execution of the wind control turbines for network since it lessens the all music and commotion from the lattice. In this venture, utilizing of PWM innovation with transformer topology to change over DC voltage to AC voltage to matrix, recreation of wind turbine interfaced to acceptance generators by utilization of variable speed dc engines, joining power yield of enlistment generators to charge regular dc transport bar and furthermore utilizing criticism instrument to sense yield air conditioning voltage and control by PWM innovation with obligation cycle adjustment.

References

- [1] Improving Power Quality of Wind Energy Conversion System with Harmonic Filters by IJECE, August 2013.
- [2] Improved grid integration of wind energy systems Faculty of Electrical Engineering, Helmut Hamburg, Germany 2011
- [3] Modeling and Control of Variable-Speed Wind-Turbine Drive-System Dynamics by P. Novak, T. Ekelund 2007
- [4] Power Quality Improvement For Grid Connected Wind Energy System By Using Statcom by (IJAIEM) Volume 03, Issue 09, September 2014
- [5] Simulation of Directly Grid-Connected Wind Turbines for Voltage Fluctuation Evaluation by ISSN Volume2, August 2007
- [6] Stability of photovoltaic and wind turbine grid-connected inverters for a large set of grid impedance values *IEEE Trans. on Power Electronic*, volume 21, Jan 2006.
- [7] Modeling and slip control of a doubly fed induction wind turbine generator by IEEE
- [8] Control of a wind-driven self-excited induction generator supplying an induction motor load for maximum utilization. Canadian Conference on Volume 1 IN 2000
- [9] Pitch-controlled variable-speed wind turbine generation Industry Application Conference, 1999 BY IEEE (volume 1)
- [10] Dynamic performance of double fed induction generator for wind turbines
- [11] A Doubly Fed Induction Generator Controlled in Single-Sided Grid Connection for Wind Turbines BY IEEE Volume 28.
- [12] Integrated Simulation of a Doubly fed induction generator wind turbine Power Electronics and Applications By EPE 2009
- [13] Fixed-speed and variable-slip wind turbines providing spinning reserves to the grid by IEEE IN 2013.
- [14] Wind Turbines with Doubly-Fed Induction Generator Systems with Improved Performance due to Grid Requirements BY IEEE IN 2007.
- [15] F. Blaabjerg, Z. Chen, R. Teodorescu, F. Iov proceeding by IEEE, 2006
- [16] NirajDanidhariya, Kaamil B Shah proceeding by IJETAE, April 2013
- [17] Uma Shankar S, Ambili Mathew, Kothari D P, Vijayalumar D proceeding by IJECEE, MAY 2013
- [18] GidwaniLata and H.P. Tiwari proceeding by IMECS, MARCH 2011
- [19] S. M. Barakati, M. Kazerani, Senior Member and X. Chen proceeding by IEEE 2005
- [20] FredeBlaabjerg, Marco Liserre and KeMa proceeding by IEEE, 2011

Author Profile



Surendra Singh Bhandawat, Dual Degree (B.Tech + M.Tech) received B.Tech in Electrical Engineering and Pursuing M. Tech in Energy Engineering from Suresh Gyan Vihar University, Jaipur, Rajasthan, India. He is doing this thesis under the guidance of Professor Neha Tiwari, Assistant Professor at Suresh Gyan Vihar University, Jaipur, Rajasthan, India