

Removal of Iron from Ground Water Using Natural Adsorbents

Sheena K.N¹, Bhavia K.K²

^{1,2}A P J Abdul Kalam Technological University, Mdit, Ulliyeri, Calicut

Abstract: Water is the very essential material to all living things for their survival. Good health condition depends on purity of water. Water may be exposed to various activities such as industrial, agricultural, domestic etc which leads to the deterioration of water quality. Water quality problem typically associated with high concentration of iron content. Payyoli is a municipality town on the Malabar Coast of Kozhikode. People of Payyoli are facing serious drinking water issues due to the presence of high level of iron content. This study tries to introduce low-cost adsorbents sugarcane bagasse (SCB), coconut coir (COC) and neem leaves (NL) for the removal of iron from water. Effect of parameters like contact time, pH and adsorbent dosage on iron removal were determined using each of these adsorbents.

Keywords: Sugarcane bagasse, Coconut coir, Neem leaves, Iron

1. Introduction

Water is very essential material for all living things for their survival. Out of all water on Earth, saline water in ocean, seas and saline ground water make up about 97% of it. Remaining 2.5-2.75% contribute fresh water. Less than 0.01% of it as surface water in lakes, swamps, rivers etc. water may occur in solid form or liquid form or gaseous form. All these three forms are useful to human beings. The different human activities such as industrial activities, domestic activities and agricultural activities will lead to water pollution. Water quality problem typically associated with high level concentration of iron. Iron removal from groundwater is therefore, a major concern for most scientific researchers [19]. People of Payyoli in Calicut facing serious drinking water problems due to the presence of iron in well water. The excessive iron content in drinking water will lead to unusable. This study is trying to introduce some natural adsorbents such as sugarcane bagasse (SCB), coconut coir (COC) and neem leaves (NL) for the removal of iron from drinking water. The water samples are collected from Payyoli in Calicut District.

2. Objectives

- Preparation of adsorbents using sugarcane bagasse (SCB), coconut coir (COC) and neem leaves (NL).
- Iron removal using prepared natural adsorbents.
- Determination of effect of various experimental parameters on iron removal.

3. Adsorption

Adsorption is a highly effective physicochemical process for removing heavy metals from wastewater, especially at low initial metal concentrations. Agricultural by-products such as rice husk, coconut husk, grounded coconut shells, saw dust, neem leaves and barks, sugarcane bagasse, as well as waste materials such as sludge fly ash and bottom ash have been reported in this special issue for the removal of metals from wastewater [7].

Adsorption is a surface phenomenon, in which molecules of adsorbate are attracted and held to the surface of an adsorbent until equilibrium is reached between adsorbed molecules and those still freely distributed in the carrying gas or liquid [4].

4. Materials and Methodologies

4.1 Raw materials

Sugarcane bagasse (SCB), coconut coir (COC) and neem leaves (NL) are the important materials used for this project.

4.2 Chemicals Used

Concentrated Hydrochloric acid, Hydroxylamine Hydrochloride, 1,10 Phenanthroline, Ammonium Acetate, Ferrous Ammonium Sulphate are the chemicals used for the study

4.3 Instruments

Instruments used are UV-VIS spectrophotometer, pH meter, Magnetic stirrer and Turbidity meter.

4.4 Preparation of adsorbents

SCB and Coconut coir were first washed thoroughly with distilled water to remove the dust particles, then soaked overnight in 0.1 N NaOH solutions and again washed well with DDW. Then they were soaked in 0.1 N CH₃COOH for a period of 2–3 h to remove the traces of NaOH. It was thoroughly washed again with DDW till the wash water became colourless and then filtered, well dried, powdered and sieved before use [16].

Neem leaves are washed several times with distilled water to remove dust and other impurities. Then drying, it was ground using domestic mixer. The samples were washed with distilled water to remove colour and dried in an oven at 80 °C for 24 hours. The dried sample was stored in airtight bottles

for further use without any chemical or physical treatment [9].

4.5 Preparation of aqueous solution of iron

Stock solution of iron (1000mg/l) was prepared by dissolving calculated amount of ferrous ammonium salts in distilled water and also add sulphuric acid.

4.6 Collection of Samples

Payyoli is a municipality town on the malabar coast of Kozhikode district in south Indian state of Kerala. Three samples were collected from Payyoli of Kozhikode district.



Figure 1: Sample 1



Figure 2: Sample 2



Figure 3: Sample 3

4.7 Batch Adsorption studies

Batch adsorption study is done by adding dried adsorbent in to the samples. The sample is continuously stirred for one hour. After that filtered and analyzed using spectrophotometer[9].

5. Results

5.1 Characteristics of Samples

Parameters	Sample 1(S ₁)	Sample 2(S ₂)	Sample 3(S ₃)
Turbidity(NTU)	215	27	53
pH	6.95	6.95	6.85
Conductivity(ms/ppt)	3.037	3.570	4.303
TDS(ms/ppt)	1.609	2.30	2.91
DO(mg/l)	8.1	9.1	9
TSS(g)	0.0088	0.0011	0.0034
Hardness(mg/l)	155	175	125
Chloride(mg/l)	8.86	35.45	26.59
Iron(mg/l)	1.86	0.84	0.95

5.2 Effect of adsorbent dosage on sample 1

The sample 1 contains 1.86mg/l iron. Contact time is kept as 60 minutes and pH 5.

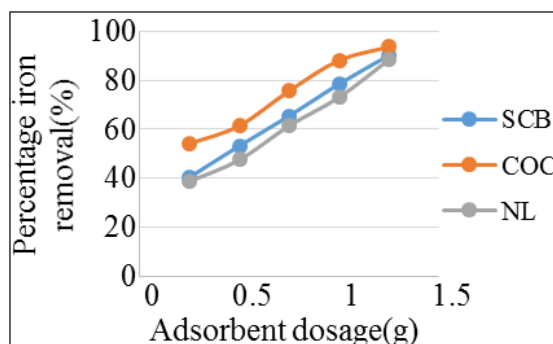


Figure 4: Percentage iron removal vs adsorbent dosage (S1)

5.3 Effect of adsorbent dosage on sample 2

The sample 2 contains 0.84mg/l iron. Agitation time is 60 minutes and pH 5.

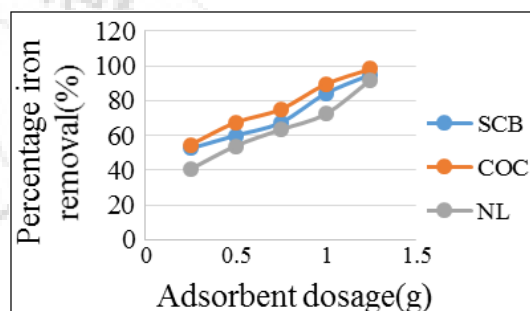


Figure 5: Percentage iron removal vs adsorbent dosage (S2)

5.4 Effect of adsorbent dosage on sample 3

The sample 3 contains 0.95mg/l iron. Contact time is 60 minutes and pH is 5.

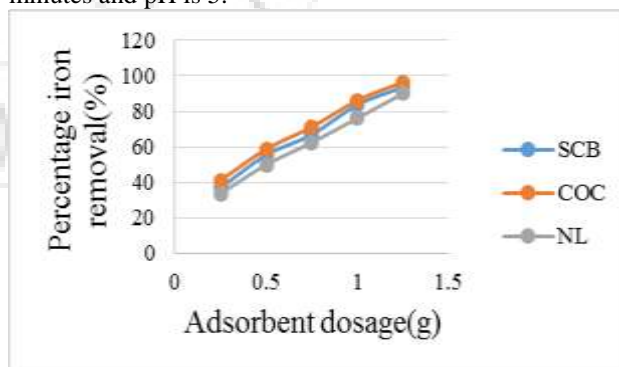


Figure 6: Percentage iron removal vs adsorbent dosage (S3)

Result shows that on increasing the adsorbent dosage the iron removal efficiency also increases. At higher adsorbent dosage more binding sites are available [16].

5.5 Effect of contact time on sample 1

The sample 1 contains 1.86mg/l iron. Adsorbent dosage is 1.25g and pH is 5.

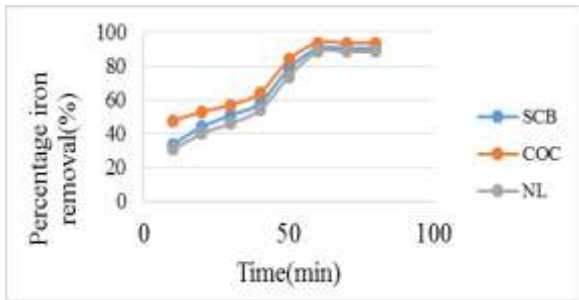


Figure 7: Percentage iron removal vs time (S1)

5.6 Effect of contact time on sample 2

The sample 2 contains 0.84mg/l iron. Adsorbent dosage is 1.25g and pH is 5.

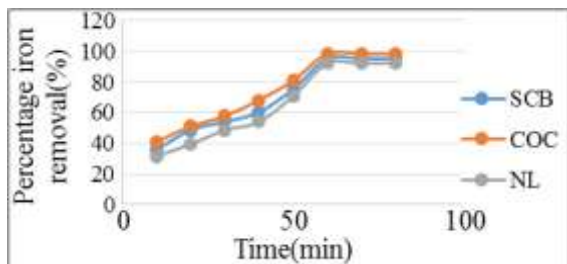


Figure 8: Percentage iron removal vs time (S2)

5.7 Effect of contact time on sample 3

The sample 3 contains 0.95mg/l iron. Adsorbent dosage is 1.25g and pH is 5.

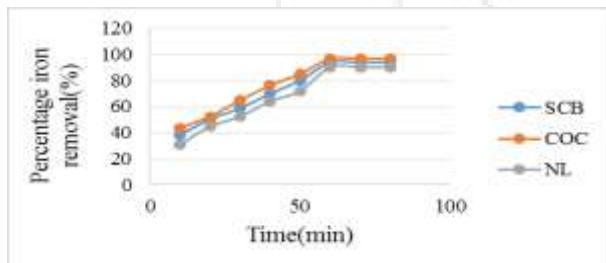


Figure 9: Percentage iron removal vs time (S3)

On increasing the contact time the iron removal efficiency also increases. After 60 minutes of shaking the adsorbent get saturated. All binding sites were filled with adsorbate [16].

5.8 Effect of pH on sample 1

The sample 1 contains 1.86mg/l iron. Adsorbent dosage is 1.25g and contact time is 60 minutes.

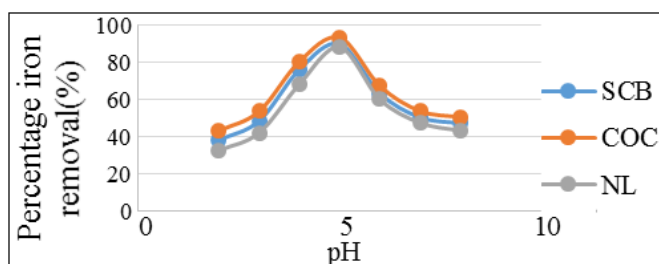


Figure 10: Percentage iron removal vs pH (S1)

5.9 Effect of pH on sample 2

The sample 2 contains 0.84mg/l iron. Adsorbent dosage is 1.25g and contact time is 60 minutes.

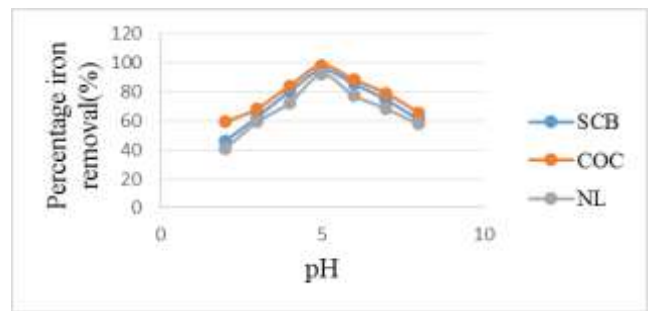


Figure 11: Percentage iron removal vs pH (S2)

5.10 Effect of pH on sample 3

The sample 2 contains 0.95mg/l iron. Adsorbent dosage is 1.25g and contact time is 60 minutes.

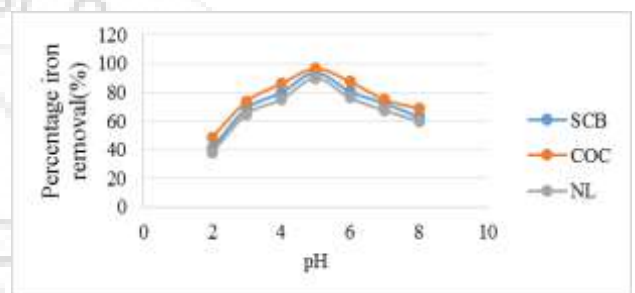


Figure 12: Percentage iron removal vs pH (S3)

On increasing the pH removal efficiency also increases upto certain limit and then efficiency decreases. Optimum pH is obtained as 5 for three adsorbents.

6. Discussions

The physicochemical analysis of the samples shows that it contains high level of iron content and turbidity values. According to WHO allowable limit of iron in water is 0.3mg/l. As per IS 10500: 2004 drinking water standards desirable limit of turbidity is 5 NTU. Here both turbidity and iron exceed the limit. On the basis of the results it is clear that the three adsorbents SCB, COC and NL have significant effect on iron removal. Contact time, pH, and adsorbent dosage have significant effect on iron removal. On increasing the adsorbent dosage 0.25-1.25g of different adsorbents the iron removal efficiency also increases. At higher adsorbent dosage more binding sites are available hence the efficiency is increases. The contact time is also varied 10-60 minutes. Maximum efficiency obtained 60 minutes of shaking. After 60 minutes the adsorbent is saturated. Initial concentration is also affect the removal efficiency. COC adsorbent has better iron removal efficiency than SCB and NL adsorbent. The pH is varied 2-8. When pH of the sample increased the removal efficiency also increases then decreases.

7. Conclusions

- This study shows that the three adsorbents have significant effect on iron removal.
- On comparing the three adsorbents the iron removal for coconut coir is higher than that of neem leaves and sugarcane bagasse.
- Since sugarcane bagasse, neem leaves, coconut coir are easily available and ecofriendly it can be used for the removal of iron from water.

References

- [1] Aniket A. Jinturkar and Parag S. Sadgir (2017), Removal of iron from aqueous solution using neem leaf powder as an adsorbent, IJIRSET, 5, 8948-8952. 2.
- [2] Ashutosh Tripathi and Manju Rawat Ranjan(2015),Heavy metal removal from wastewater using low cost ,adsorbents,Journal of bioremediation & biodegradation,6,1-5
- [3] B.S. Girgis, A.A.M. Daifullah and H.M.H. Gad (2002), Utilization of agro-residues (rice husk) in small waste water treatment plans, science direct, 5, 1723-1731.
- [4] Dipankar Thakuria and Buddaratna. J.Godbole (2016), Contamination and removal of iron and fluoride from groundwater by adsorption and filtration: A review, IJSTE, 7, 80-85.
- [5] G.Anusha (2011), Removal of iron from waste water using bael fruit shell as adsorbent, ICEST, 2,258-260.
- [6] Ghanshyam Pandhare and S.D.Dawande (2013), Neem leaves powder as a low cost adsorbent and its characteristics, IJAET, 2, 61-62.
- [7] Hajira Thahir, Muhammad Sultan, Nasir Akhtar, Usma Hameed and Tahreem Abid (2012), Application of natural and modified sugarcane bagasse for the removal of dye from aqueous solution, Journal of Saudi Chemical Society 20, 115–121.
- [8] Islamuddin Rajneesh K, Gautam, Noor Fatima Siddique and Nandkishor More (2016),Azadirachta Indica (Neem) Leaf Powder Used As A Natural Adsorbent For TheRemoval Of Chromium Cr (VI) From An Aqueous Solutions, International Research Journal of Engineering and Technology(IRJET),8,2234-2239
- [9] Jai M Paul, Jis Jimmy, Josento M Therattil, Linda Regi and Shirin Shahana (2017),Removal of heavy metals using low cost adsorbents,IOSR-JMCE, 3, 48-50.
- [10] K.S.Beenakumari(2009),Removal of iron from water using modified coconut shell charcoal as adsorbent,current world environment,2,321-326.
- [11] Kannan Pakshirajan et.al(2016), Special Issue on Biofilm Engineering for Heavy- Metal Removal and Recovery,Journal of environmental engineering,9
- [12] Lavanya V, Elangovan N.S and Arunthathi S (2015), Removal of chromium from groundwater using neem leaves as adsorbent, IJER, 2,439-444.
- [13] M.A. Barakat (2010), New trends in removing heavy metals from industrial wastewater, Arabian Journal of Chemistry, 4, 361–377.
- [14] N.Ahalya, R.D. Kanamadi and T.V. Ramachandra (2006),Biosorption of iron from aqueous solution using the husk of cier arientinum, Indian journal of chemical technology,13,122-127
- [15] N.Sangeetha P.Iyshwarya and R.G.Ramya Gayathri (2016), Removal of iron content from drinking water by using coconut coir and sugar bagasse, IJARMATE, 4, 3-4.
- [16] R.Balaji, S.Sasikala and G.Muthuraman (2014),Removal of iron from drinking/ground water by using agricultural waste as natural adsorbents, IJEIT,2,43- 46.
- [17] S.Sasikala and G.Muthuraman(2015), Chromium(VI) Removal Using Biosorbents Derived from Moringa Oleifera,industrial chemistry,1,312-318.
- [18] Salwa A. Ahmed, Ezzat M. Soliman and Alia A. Fadl (2010),Reactivity of sugarcane bagasse as natural solid phase extractor for selective removal of Fe(III) and heavy metal samples from natural water samples, Arabian Journal of Chemistry,4,63 –70.
- [19] Vivek Nandan, Ranjit N. Patil, Yuvaraj R. Chhadi, Palash M. Mohadikar and Suraj S. Lehale (2017), Removal of iron from water by using low cost adsorbents: A review, IJARIE, 2, 1911-1917.
- [20] Metcalf and Eddy,Waste water engineering treatment and reuse,McGraw Hill education(India) private limited,4,1972.
- [21] Santosh Kumar Garg,water supply engineering,Khanna publishers,29,1977.

