

An Advanced Implementation for Enhancing Color Images Using Histogram Technique

Anubhooti Purbey¹, Manish Mathuria²

¹M.Tech Scholar, Maharshi Arvind College of Engg. & Research Center, Jaipur, Raj., India

²Assistant Proff, Maharshi Arvind College of Engg. & Research Center, Jaipur, Raj., , India

Abstract: An image may be defined as a two dimensional function, $f(x,y)$, where x and y are spatial coordinates and amplitude of f at any pair of coordinates (x, y) is called intensity or gray level of image at that point. Image enhancements are used to make it easier for human visual interpretation and right understanding of imagery. There are lots of techniques used for binary and color image enhancement. By applying these techniques we can enhance or improve many characteristics from given image and we are able to extract lot of information however it is not possible from original image. In this thesis advanced algorithm is used to enhance image for which there are two important method spatial domain and frequency domain method. By using algorithm we are able to plot histogram of original image, histogram of equalized image Gaussian matched histogram. There are three important term histogram processing, histogram equalization and histogram matching (specification).

Keywords: Gaussian, histogram matching, spatial domain, visual, coordinates

1. Introduction

Enhancements are used to make it easier for visual interpretation and understanding of imagery. The key to understanding contrast enhancements is to understand the concept of an image histogram. A histogram is a graphical representation of the brightness values that comprise an image. The frequency of occurrence of each of these values in the image is shown on the y-axis. By manipulating the range of digital values in an image, graphically represented by its histogram. The simplest type of enhancement is a linear contrast stretch. This involves identifying lower and upper bounds from the histogram (usually the minimum and maximum brightness values in the image) and applying a transformation to stretch this range to fill the full range.

2. Background History

Digital Processing techniques help in manipulation of the digital images by using computers. As raw data from imaging sensors from satellite platform contains deficiencies. To get over such flaws and to get originality of information, it has to undergo various phases of processing. The three general phases that all types of data have to undergo while using digital

3. Description of System Design and Methodology

Point-processing algorithms enhance each pixel separately. With help of advanced algorithm we apply it on binary and color images and as we know images are of many types. Some time it becomes very tedious task to recover information from images because at edges of an image there is chance that information can be destroy so we have to apply very precisely the appropriate filter to get optimize result. There are three important parameter histogram processing, histogram equalization and histogram matching or histogram

specification. Histogram of a digital image with intensity level in the range of $[0, L-1]$ is a discrete function $h(r_k) = n_k$ where r_k is the k th intensity level and n_k is no of pixel in the image with intensity r_k . Histogram enhances the global contrast of many images, especially when the usable data of the image is represented by close contrast values. Using, this intensities can be better distributed on the histogram. It allows for areas of lower local contrast to gain a higher contrast. Histogram equalization accomplishes this by effectively spreading out the most frequent intensity values.

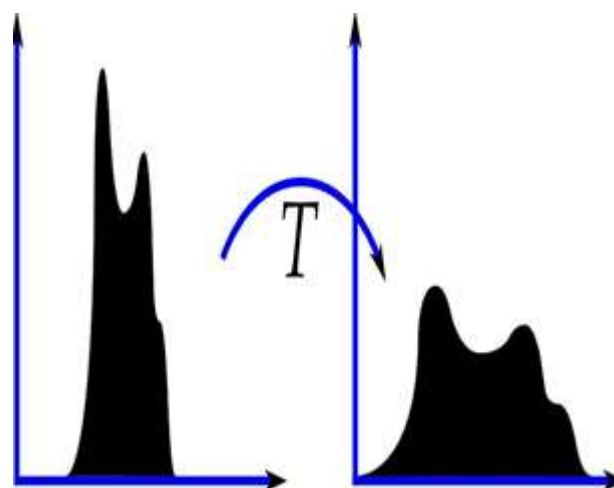


Figure 4: Histogram equalization

The method is useful in images with front and back grounds that are both bright or both dark. There are two ways to think about and implement histogram equalization, either as image change or as palette change. The operation can be expressed as $P(M(I))$ where I is the original image, M is histogram equalization mapping operation and P is a palette.

level i . The probability of an occurrence of a pixel of level i in the image is

$$p_x(i) = p(x = i) = \frac{n_i}{n}, \quad 0 \leq i < L$$

L being the total number of gray levels in the image (0 to 255),

n = total number of pixels in image, and $p_x(i)$ image's histogram for pixel value i , normalized to $[0,1]$. *cumulative distribution function* corresponding to p_x as

$$cdf_x(i) = \sum_{j=0}^i p_x(j)$$

which is also the image's accumulated normalized histogram.

We would like to create a transformation of the form $y = T(x)$ to produce a new image $\{y\}$, with a flat histogram. Such an image would have a linearized CDF across the value range, i.e.

$$cdf_y(i) = ik$$

for some constant K . The properties of the CDF allow us to perform such a transform it defined as

$$y = T(k) = cdf_x(k)$$

where k is in the range $[0,L]$. Notice that T maps the levels into the range $[0,1]$, since we used a normalized histogram of $\{x\}$. In order to map the values back into their original range, the following simple transformation needs to be applied on the result:

$$y' = y \cdot (\max\{x\} - \min\{x\}) + \min\{x\}$$

4. Result

Consider an image for which we have to show wavelet decomposition, histogram shifting and enhanced image. For enhanced image we changed the value of k and get different value of EME and there is a table listed below for different value of K and EME.



Figure 5: Original image



Figure 6: Wavelet decomposition of original image

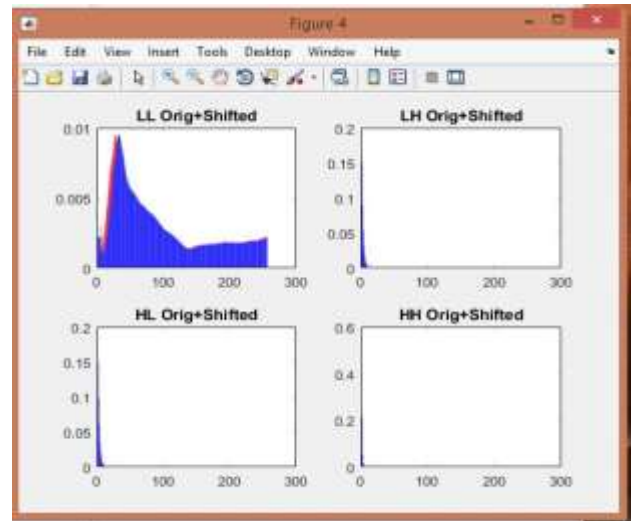


Figure 7: Histogram shifting of original image

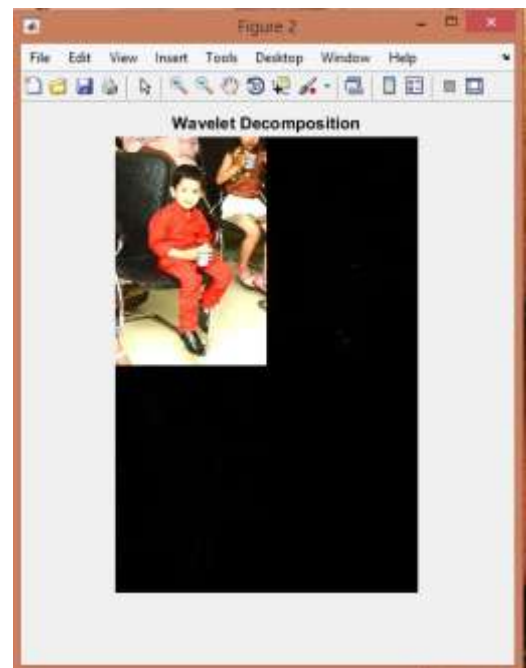


Figure 8: Enhanced image original image

Table I with different vale of EME by altering K

Sr. No.	K1	K2	K3	K4	EME
1	1	1	1	1	6.4245
2	5	0	0	0	6.5574
3	5	5	5	5	6.5648
4	2	5	12	18	6.8178
5	255	255	255	255	6.9849

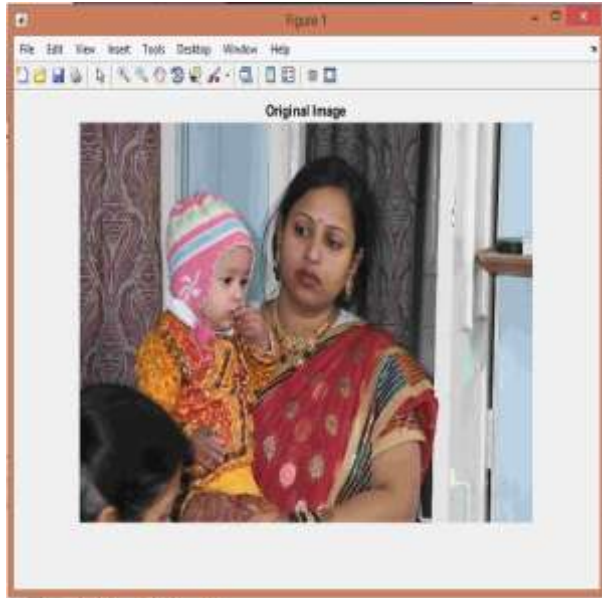


Figure 9: Original image

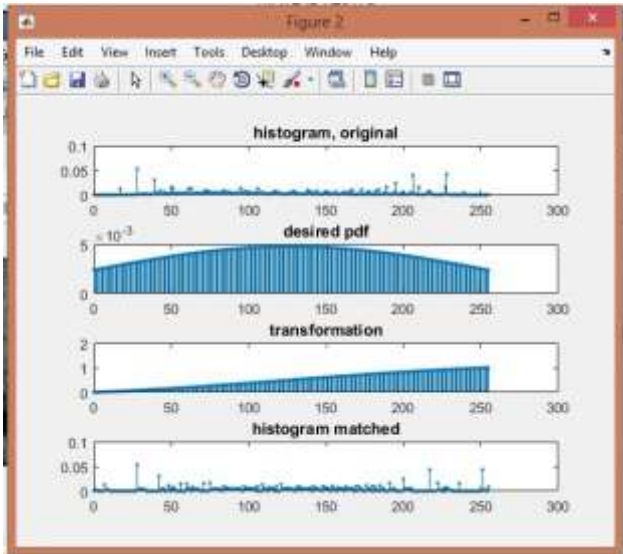


Figure 10: Original histogram, desired pdf, transformation, histogram matched



Figure 11: Gaussian matched histogram

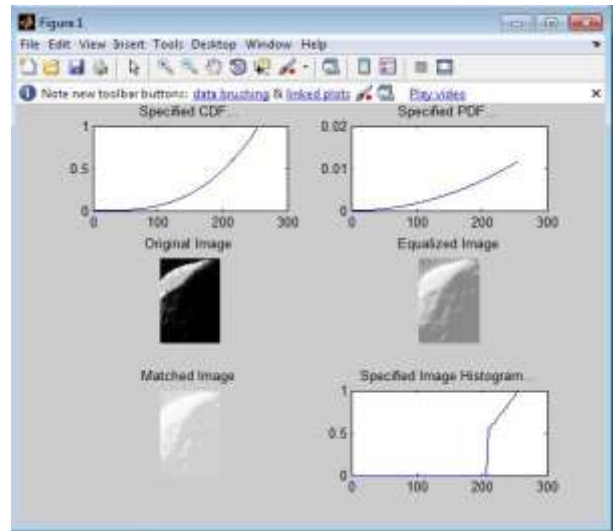


Figure 12: Gaussian matched histogram



Figure 13: Original image



Figure 14: Original image and it's histogram, equalized image1 and 2 with their histogram

5. Conclusion

Using advance algorithm we can recover histogram, equalized histogram, gaussia matched equalization, histogram desired pdf, equalization function, wavelet decomposition and many more result. By changing scaling factor we get EME and image enhanced significantly from which lot of information caan be recovered..

References

- [1] T.Zong, H.Lin and T.Kao, "Adaptive local contrast enhancement method for medical images displayed on a video monitor." Medical Engineering Physics vol. 22, pp. 79-87, 2000
- [2] T. Chen, H. R. Wu, and B. Qiu, "Adaptive postfiltering of transform coefficients for the reduction of blocking artifacts," IEEE Trans. Circuits Syst. Video Technol., vol. 11, no. 5, pp. 594-602, May 2001
- [3] Jongho Kim and Chun Bo Sim, "Compression artifacts removal by signal adaptive weighted sum technique," IEEE Transactions on Consumer Electronics, Vol. 57, No. 4, November 2011
- [4] S.k Naik and C.A.Murthy, "The preserving color image enhancement without gamut problem," IEEE Trans on image processing 12(12) pp1591-1598, Dec 2003
- [5] S.S. Agaian, B. Silver, K.A.Paanette "Transform coefficient histogram based image enhanced algorithm using contrast entropy," IEEE Trans Image Process, Vol. 16, No. 3, pp 741-758, March 2007
- [6] W.K.Pratt, Digital image processing, Wiley, New York 2000
- [7] A.K.Jain, Fundamental of digital image processing, Prentice hall, Englewood cliff, New Jersey, 1991
- [8] R.C. Gonzalez and R.E.Woods, Digital image processing. Wesley Reading, MA 1997
- [9] R. Hummel, "Histogram modification technique" computer graphics and image processing vol. 4, pp. 209-224, Nov. 1995
- [10] W. Luo, "Efficient removal of impulse noise from digital images," IEEE Trans. Consumer Electron., vol. 52, no. 2, pp. 523-527, May 2006