

Analysis of Tensile Strength & Impact Energy of Weld Specimen in Mild-Steel Square Bar with Variable Arc Voltage using Semi-Automatic Shielded Metal Arc Welding Machine

Naresh Nayak¹, Chandra Shekhar Nagendra²

¹M. Tech. Scholar, Mechanical Engineering, Shri Shankaracharya Technical Campus - Shri Shankaracharya Engineering College, Bhilai
[nareshnnyak20\[at\]gmail.com](mailto:nareshnnyak20[at]gmail.com)

²Assistant Professor, Department of Mechanical Engineering, Shri Shankaracharya Technical Campus - Shri Shankaracharya Engineering College, Bhilai
[nagendra24587\[at\]gmail.com](mailto:nagendra24587[at]gmail.com)

Abstract: *Welding processes are widely used throughout industry to perform a range of fabrication tasks. Of the various welding techniques available, stick-electrode welding, more formally known as Shielded Metal Arc Welding (SMAW) is one of the most common. SMAW is a consumed electrode welding technique, i.e. the electrode not only supplies the filler-metal, but also acts as the consumable material. Currently the electrode feed rate is carefully controlled during the welding process to ensure that the arc length remains constant. The obtained results will give the Tensile Strength & Impact Energy of the weld, and Weight of Specimen used. These two parameters viz. Tensile Strength & Impact Energy will help to conclude the result obtained. The strength of the welded work-piece will be tested and recorded with the help of Tests to be performed in Universal Testing Machine UTM (Tensile test) & Impact Test Machine ITM (Impact Test). This will be helpful in confirming the values of process parameters in SMAW. Later on, calculation of mass of specimen is done to determine the weight of the weld specimen.*

Keywords: SMAW – Shielded Metal Arc Welding, ITM – Impact Testing Machine, UTM - Universal Testing Machine, Process Parameters – Arc Voltage

1. Introduction

Welding processes are widely used throughout industry to perform a range of fabrication tasks. Of the various welding techniques available, stick-electrode welding, more formally known as Shielded Metal Arc Welding (SMAW) is one of the most common. SMAW is a consumed electrode welding technique, i.e. the electrode not only supplies the filler-metal, but also acts as the consumable material. Currently the electrode feed rate is carefully controlled during the welding process to ensure that the arc length remains constant. At present SMAW (Shielded Metal Arc Welding) process is done at fixed Voltage, fixed welding speed & fixed arc gap. This research work focuses light on measuring, recording and analyzing the variations in the weld strength and hardness of the weld if the fixed parameters would be changed within a given range. In this research, three process variable parameters are taken into account viz. arc voltage, welding speed & arc gap. This can be done by varying one of the process variable parameters and making the other two constants. Figure 1 illustrates the above statement diagrammatically. Result will be obtained for each and every varying process variable parameters and will be recorded. The obtained results will give the Tensile Strength & Impact Strength of the weld, and Weight of Specimen used. These two parameters viz. Tensile Strength & Impact Energy will help to conclude the result obtained. The strength of the welded work-piece will be tested and recorded with the help of Tests to be performed in Universal Testing Machine UTM (Tensile test) & Impact Test Machine ITM (Impact Energy Test). This will be helpful in

confirming the values of process parameters in SMAW. Later on, calculation of mass of specimen is done to determine the weight of the weld specimen.

2. Literature Review

Patnaik et. al. (2007) [15] established a relationship between the controlling factors and performance outputs by means of Non-linear Regression Analysis and developed a valid mathematical model and Genetic Algorithm (GA) to optimize the welding parameter and performance output.

S Kumanan et. al. (2007) [16] worked on the application of Taguchi Technique and Regression Analysis to determine the optimal process parameters for SAW. They have carried out an experiment on a semi automatic submerged arc welding machine and the signals to noise ratios have been computed to determine the optimum parameters. The percentage contribution of each factor has been validated by ANOVA technique. Multiple regression analysis has also been carried out using SPSS software to develop mathematical models to predict the bead geometry for the given welding conditions. They also predicted the bead geometry from the developed model from the corresponding input data.

Chandel and Seow [17], presented the mathematical prediction of the effect of current, polarity used, electrode diameter and its extension on the melting rate, bead height, bead width and weld penetration in SAW. They concluded that for a given current (heat input) the melting rate can be

increased by using electrode negative polarity, longer electrode extension, and smaller diameter electrodes. There are two other ways to increase the deposition rate without increasing the heat input; these are: (i) using a twin-arc mode and (ii) adding metal powders.

Chandel, Yang and Bibby [18] while investigating the effects of process variables on the bead width of submerged-arc weld deposits concluded that bead width is affected by the electrode polarity, electrode diameter, electrode extension, welding current, welding voltage and welding speed. A positive electrode polarity, a large electrode diameter, a small electrode extension and a high welding voltage encourages a large bead width in most cases. The bead width is not affected significantly by the power source used (i.e. constant voltage or constant current) when an acidic fused flux is used. However, when a basic fused flux is used, constant-current operation gives somewhat larger bead widths.


Mostafa and Khajavi [19], described the prediction of weld penetration as influenced by Flux Cored Arc Welding process parameters like welding current, arc voltage, nozzle-to-plate distance, electrode-to-work angle and welding speed. The optimization result shows penetration will be maximum when welding current, arc voltage, nozzle-to-plate distance and electrode-to-work angle are at their maximum possible value and welding speed is at its minimum value. Increase in welding current (I) increases the depth of penetration (P). Increase in welding speed (S) causes a decrease in depth of penetration (P). Increase in arc welding voltage (V) resulted in an increase in depth of penetration (P), Increase in electrode-to-work angle from 90° to 120° (i.e. for normal to backhand) had resulted in increase of depth of penetration. Increase in nozzle-to-plate distance (N) also causes an increase in depth of penetration (P). Based on this investigation it can be concluded that the developed model can be used to predict adequately the weld bead penetration within the specified range of the process parameters. The optimization method can also be used to find optimum welding conditions for maximum weld bead penetration. Their results are in agreement with the results of Chandel et. al..

3. Problem Identification

The present situation in the field of SMAW (Shielded Metal Arc Welding) is that the whole welding process is done at fixed arc gap. This research work focuses light on what will happen if the fixed arc Voltage would be changed within a given range. In this research, the process variable parameter is taken into account is Arc Gap. This can be done by varying process variable parameter i.e. the Arc Voltage and keeping Welding Speed and Arc Gap at constant i.e. Welding Speed is kept constant at 5 mm.s⁻¹ and Arc Gap is kept constant at 1.5 mm. Result will be obtained for each and every values of the process variable parameter ranging from 25 Volt to 40 Volt and will be recorded. The results will give the best possible values of Arc Voltage at which

welding can be performed with best possible Tensile Strength and Impact Energy of the weld.

4. Methodology

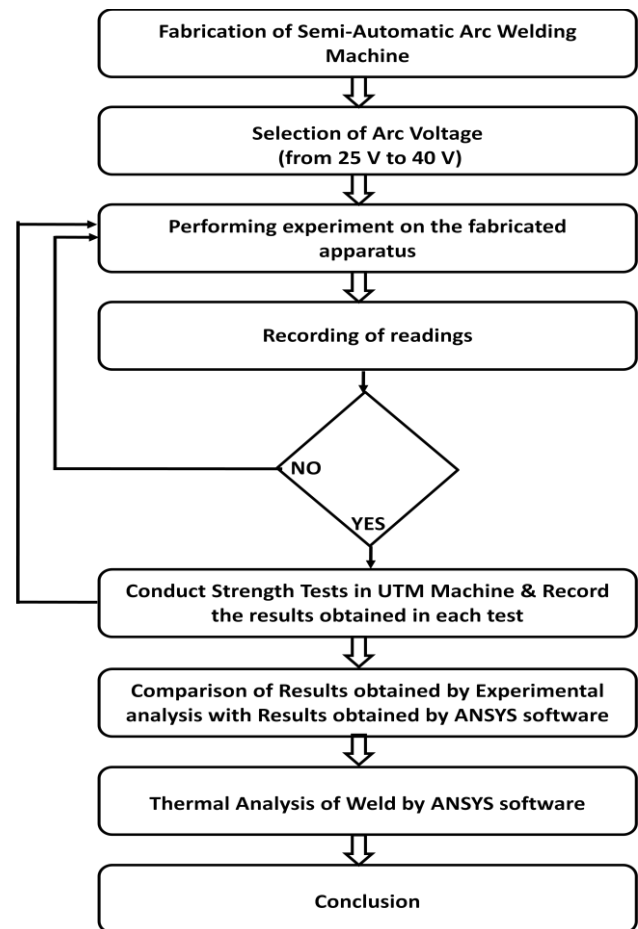


5. Result & Conclusion

The welded work piece will be tested for tensile test, compression test & shear test with the help of Universal Testing Machine (UTM) to obtain the best Arc Voltage at which Welding can be performed thus keeping the Welding Speed and Arc Gap at constants i.e. Welding Speed is 5 mm.s⁻¹ and Arc Gap is 1.5 mm, so that the Tensile Strength and Impact Energy is at its best. Thus, when the results will be obtained, one will be able to find out the best possible Arc Voltage for performing welding at which the Strength of the work-piece will be at its best. Individual Strength Charts are generated using the results obtained by experimental analysis. This will be helpful for comparing the Strengths among them at a given Arc Voltage. Thus at each Arc Voltage values considered for experimental analysis, Strength analysis is done and a Strength Chart is generated for the same so that the comparison among the strengths for a particular arc voltage may be easily made. The result obtained by experimental analysis is as shown below:

Tensile Strengths of four specimens for Arc Voltage Ranging from 25 Volt to 40 Volt

		Tensile Strengths (in MPa)			
		Specimen-1	Specimen-2	Specimen-3	Specimen-4
Arc Voltage (in Volt)	25 Volt	109.7	112.6	118.0	125.5
	35 Volt	91.5	95.3	103.5	110.5
	35 Volt	89.5	91.4	100.8	106.8
	40 Volt	85.6	89.0	94.2	97.3

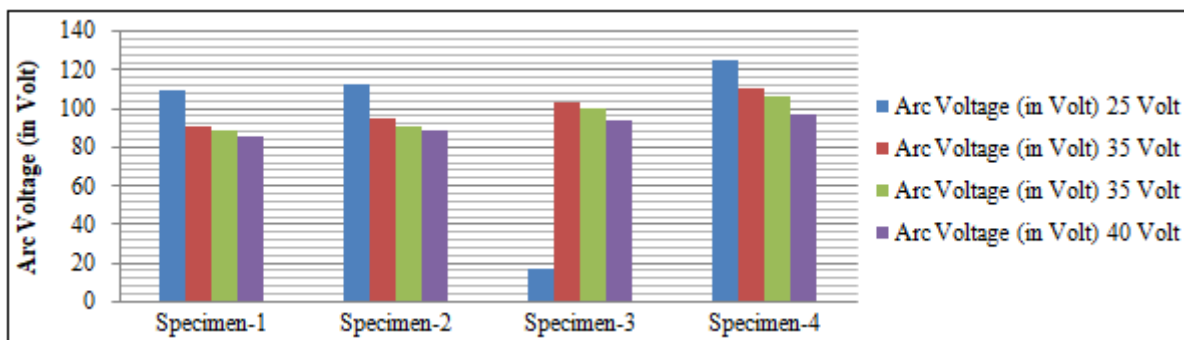

Impact Energy of four specimens for Arc Voltage Ranging from 25 Volt to 40 Volt

		Impact Energy (in Joule)			
		Specimen -1	Specimen -2	Specimen -3	Specimen -4
Arc Voltage (in Volt)	25 Volt	12.0	13.8	16.0	18.4
	35 Volt	10.8	11.4	13.2	14.8
	35 Volt	8.4	9.7	11.3	12.6
	40 Volt	7.1	8.5	9.2	10.0


From the above result and graph obtained by comparing the four specimens Tensile and Impact Energy for Arc Voltage ranging from 25 Volt to 40 Volt, made by welding Mild Steel Square Bar (Specimen Thickness x 150 mm Length) x 2 Nos. welded at the centre; it can be concluded that the Tensile Strength increases when thickness of material increases from 6 mm to 12 mm whereas Impact Energy of the weld also increases when thickness of material is increases from 6 mm to 12 mm.

Calculation of Weight of Specimen used in Kilogram:

Source: <https://sites.google.com/site/standardbasicengineering/home/weights-of-round-square-hexagon-steel-brass-bars>

Calculation of Weight of Specimens (in Kg)


Specimen No.	Mass of Steel (in Kg/m)	Mass of Steel ((in Kg/mm)	Thickness of Specimen (in mm)	Length of Specimen (in mm)	No. of Parts	Weight of Specimen (in Kg)
Specimen-1	0.283	0.000283	6	150	2	= 0.000283 x 6 x 150 x 2= 0.5094
Specimen-2	0.502	0.000502	8	150	2	= 0.000502 x 8 x 150 x 2= 0.9036
Specimen-3	0.785	0.000785	10	150	2	= 0.000785 x 10 x 150 x 2= 1.143
Specimen-4	1.130	0.001130	12	150	2	= 0.001130 x 12 x 150 x 2= 2.034

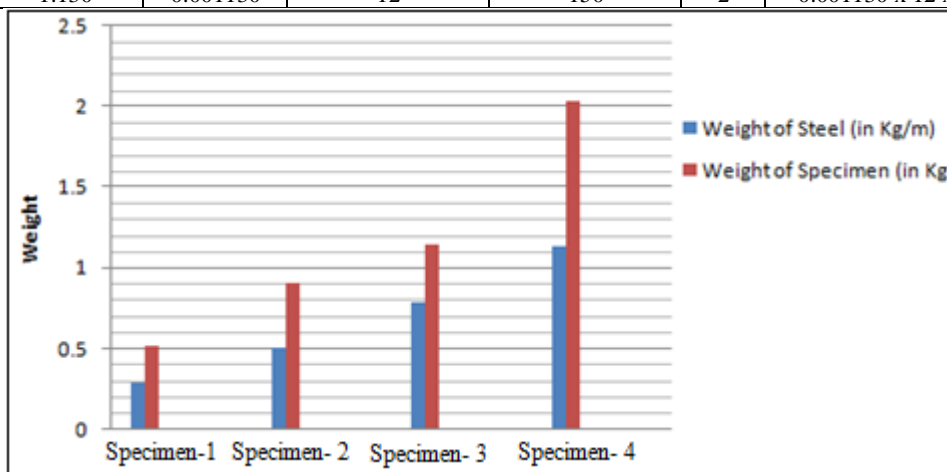

Weight of Specimens (in Kg)



Weight of Steel (in Kg/mm)

Specimen No.	Weight of Steel ((in Kg/mm)
Specimen-1	0.000283
Specimen-2	0.000502
Specimen-3	0.000785
Specimen-4	0.00113

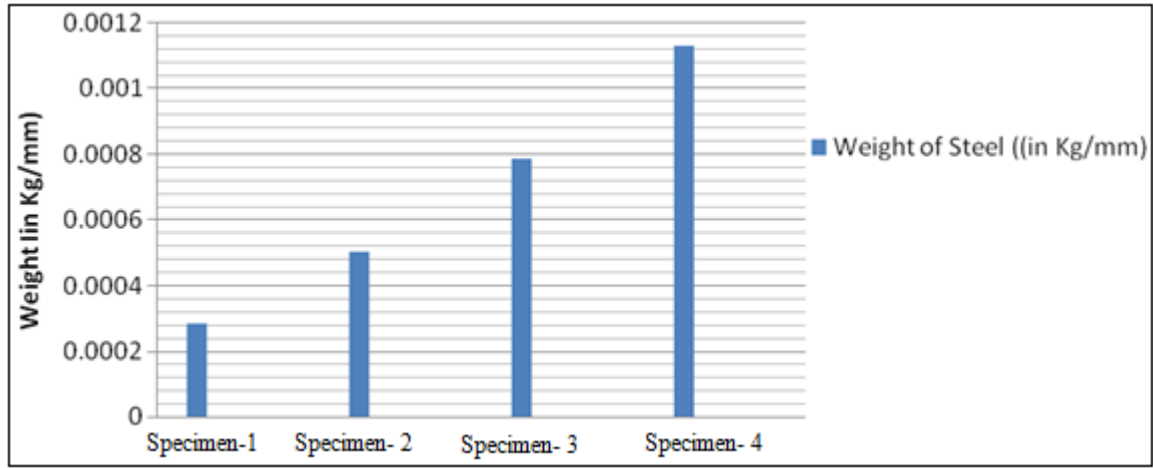

Weight of Steel (in Kg/mm)

Parameters	Arc Voltage	Specimen			
		Specimen-1	Specimen-2	Specimen-3	Specimen-4
Mass of Specimen (in Kg/m)	-	0.283	0.502	0.785	1.130
Weight of Specimen (in N/mm)	-	0.00283	0.00502	0.00785	0.01130
Tensile Strength (in MPa)	25 Volt	109.7	112.6	118.0	125.5
	30 Volt	91.5	95.3	103.5	110.5
	35 Volt	89.5	91.4	100.8	106.8
	40 Volt	85.6	89.0	94.2	97.3
Impact Energy (in Joule)	25 Volt	12.0	13.8	16.0	18.4
	30 Volt	10.8	11.4	13.2	14.8
	35 Volt	8.4	9.7	11.3	12.6
	40 Volt	7.1	8.5	9.2	10.0

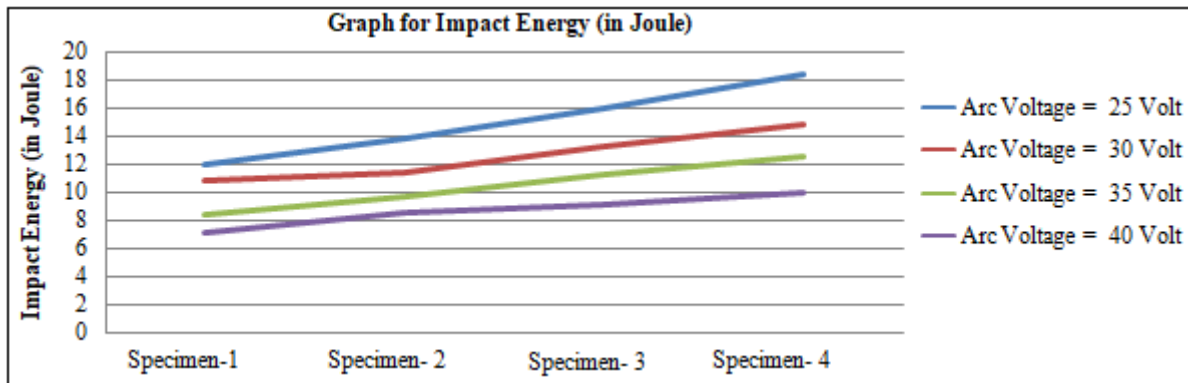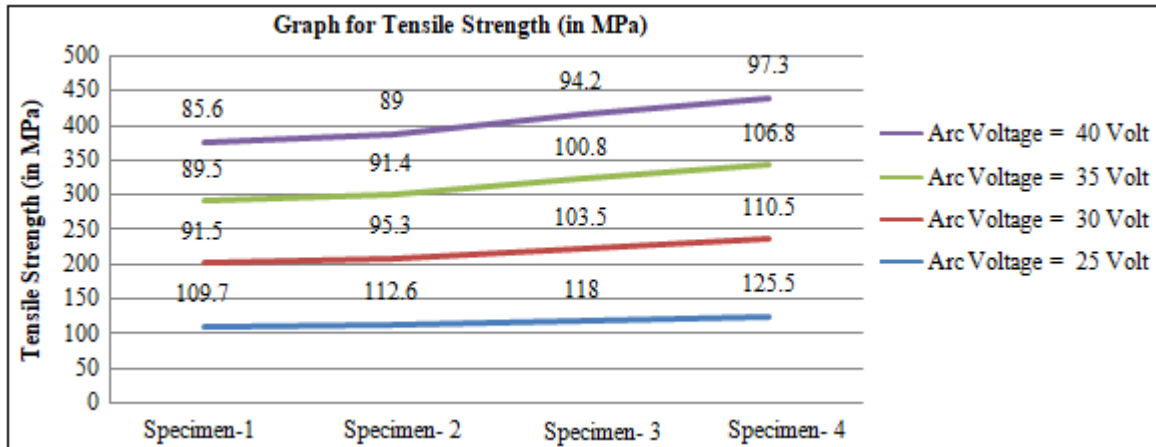

References

- [1] Ajitanshu Vedrtanam, G. S. (2018). Optimizing submerged arc welding using response surface methodology, regression analysis, and genetic algorithm. *Defence Technology*, 14, 204-212.
- [2] Ankush Choudhary, M. K. (2018). Experimental investigation and optimization of weld bead

- characteristics during submerged arc welding of AISI 1023 steel. *Defence Technology*, 01-11.
- [3] Cheng-Yu Wu, P.-C. T.-C. (2008, November 27). Development of an automatic arc welding system using an adaptive sliding mode control. *Springer*, 355-362.
- [4] G. Dhivyasri, S. R. (2018). Dynamic control of welding current and welding time to investigate ultimate tensile strength of miab welded T11 tubes. *Journal of Manufacturing Processes*, 564-581.
- [5] G. Turichin, I. T. (25-27 August, 2015). Influence of the Gap Width on the Geometry of the Welded Joint in Hybrid Laser-Arc Welding. *Physics Procedia* 78 (2015) (pp. 14-23). Lappeenranta, Finland: ELSEVIER B. V.
- [6] Liming Liu, J. S. (2018). Effect of distance between the heat sources on the molten pool stability and burn-through during the pulse laser-GTA hybrid welding process. *Journal of Manufacturing Processes*, 697-705.
- [7] Memduh Kurtulmus, A. İ. (2018, September). EFFECTS OF WELDING CURRENT AND ARC VOLTAGE ON FCAW WELD BEAD GEOMETRY. *International Journal of Research in Engineering and Technology*, 4(9), 23-28.
- [8] Omer Ustundag, A. F. (2018). Study of gap and misalignment tolerances at hybrid laser arc welding of thick-walled steel with electromagnetic weld pool support system. *Procedia CIRP* 74 (pp. 757-760). Elsevier Ltd.
- [9] P. Ramu, M. S. (2017, March). Experimental Investigations and Analysis of Weld Characteristics of AISI 410 Using MIG Welding. *International Journal of Innovative Research in Science, Engineering and Technology*, 6(3), 4280-4289.
- [10] Rahul Dixit, K. K. (2018, May). Modeling, Analysis & Optimization of Parameters for Great Weld Strength of the Chassis for off-Road Vehicles. *International Research Journal of Engineering and Technology (IRJET)*, 5(5), 1907-1915.
- [11] Sanatan Choudhury, A. S. (2017). Mathematical model of complex weld penetration profile: A case of square AC waveform arc welding. *Journal of Manufacturing Processes*, 483-491.
- [12] Shanping Lu, H. F. (2009). Arc ignitability, bead protection and weld shape variations for He–Ar–O₂ shielded GTA welding on SUS304 stainless steel. *Journal of Materials Producessing Technology*, 1231-1239.
- [13] Ugur Soy, O. I. (2011, August). Determination of welding parameters for shielded metal arc welding. *Scientific Research and Essays*, 6(15), 3153-3160.
- [14] V. Vasantha Kumar, N. M. (2011). Effect of FCAW Process Parameters on Weld Bead Geometry in Stainless Steel Cladding. *Journal of Minerals & Materials Characterization & Engineering*, 10(9), 827-842.
- [15] Patnaik et. al. (2007), An evolutionary approach to parameter optimisation of submerged arc welding in the hardfacing process. *International Journal of Manufacturing Research* Vol.-2, Issue-4, 462-483
- [16] S Kumanan et. al. (2007), Determination of submerged arc welding process parameters using Taguchi method and regression analysis. *Indian Journal of Engineering & Materials Sciences*, Vol.-14,177-183
- [17] Chandel R.S, Seow H.P, Cheong F.L (1997). " Effect of increasing deposition rate on the bead geometry of submerged arc welds," *Journal of Materials Processing Technology* 72,pp 124–128.
- [18] L.J.Yang, R.S.Chandel, M.J.Bibby (1992), The effects of process variables on the bead width of submerged-arc weld deposits, *Journal of Materials Processing Technology*, Volume 29, Issues 1–3, January 1992, Pages 133-144
- [19] N.B. Mostafa* , M.N. Khajavi (2006), Optimisation of welding parameters for weld penetration in FCAW, *Journal of of Achievements in Materials and Manufacturing Engineering*, Vol.-16, Issue 1-2, May-June 2006