

# Theoretical Investigations of Elastic Constants and Ultrasonic Wave Propagation in $\text{Co}_3$ -X (X = Mo, Nb, Ta) Alloys

Sanjay H. Bagade<sup>1</sup>, V.M.Ghodki<sup>1</sup>, P.D.Wankar<sup>1</sup>

<sup>1</sup> J. B.Science College, Wardha 442 001 (India)

**Abstract:** Elastic constants and ultrasonic velocity are well connected to the micro structural and mechanical properties of materials. In the present paper the ultrasonic properties of hexagonal closed packed structured alloys  $\text{Co}_3\text{Mo}$ ,  $\text{Co}_3\text{Nb}$  and  $\text{Co}_3\text{Ta}$  were investigated. For the study of ultrasonic properties, the second order elastic constants for these alloys were computed using the Lennard - Jones potentials. The ultrasonic velocities  $V_1$ (longitudinal),  $V_2$ (quasi shear), and  $V_3$ (pure shear) for these alloys were calculated. These angle dependant velocities  $V_1$  and  $V_2$  showed a minima and maxima respectively, when the ultrasonic wave travelled, making an angle of  $45^\circ$  with unique axis of crystal. Also, the Debye average sound velocity for these alloys was found to exhibit maxima at an angle  $55^\circ$  with unique axis of crystal. The pure shear wave velocity  $V_3$  was found to increase with the angle. The inconsistent behaviour of these angle dependant ultrasonic velocities could be attributed to the effect of the second order elastic constants of these alloys. These ultrasonic properties are useful for characterization of alloys and to determine their suitability for mechanical and industrial applications.

## 1. Introduction

Ultrasonics studies of materials are a widely used tool for various material studies and characterization. Ultrasonic velocity and other parameters are well connected to the micro structural and mechanical properties of the materials. Ultrasonic properties of various alloys, compounds, metals have been widely investigated as versatile tool in studying the inherent properties and internal structure of solids<sup>1</sup>. Ultrasonic properties offer the possibility to detect and characterise the micro structural properties as well as the flaws in the materials, control the materials behaviour based on physical mechanism and to predict future performance of materials. Wave propagation and velocity is a vital parameter in ultrasonic characterisation and can be used to obtain information about crystallographic texture. The ultrasonic velocity is directly related to elastic constants by

relation  $V = \sqrt{\frac{C}{\rho}}$ , where C and  $\rho$  are elastic constant and density of material respectively.

The elastic constants of material provide valuable information about nature of atomic bonding forces and related hardness of the material<sup>2-6</sup>. From electronic band structures, Co was found to be stable in fcc structure<sup>8</sup>. But, ion-beam mixing studies show that Co could also possess hcp structure<sup>9-10</sup>. Zhang et al, had studied Ni-X(X= Mo, Nb, Ta) alloys using solid state reaction method<sup>11-12</sup>. Ni-R(R= Mo, Nb, Ta) alloys have been studied using their elastic constants<sup>19</sup>. Since Co is known to possess nearly same mass number and lattice parameters as Ni, in the present paper, ultrasonic properties like angle dependant sound velocity and second order elastic constants for Co-X(X= Mo, Nb, Ta) alloys are evaluated and discussed.

## Theory

The second order elastic constants ( $C_{ij}$ ) of the material are given by

$$C_{ij} = \frac{\partial^2 U}{\partial e_i \partial e_j}, \quad i \text{ or } j = 1-6 \quad (1)$$

U is the elastic energy density,  $e_i = e_j$  is the component of strain tensor. There exist six second order elastic constants for the hexagonal closed packed structured materials<sup>13-14</sup> given by

$$C_{11} = 24.1p^4 C', \quad C_{12} = 5.91p^4 C', \quad C_{13} = 1.925p^6 C', \\ C_{33} = 3.46p^8 C', \quad C_{44} = 2.30p^4 C', \quad C_{66} = 9.85p^4 C' \quad (2)$$

Where  $C' = \chi a / p^5$ ,  $\chi = (1/8)[\{nb_0(n-m)\}/(a^{n+4})]$ , m, n = integers;  $b_0$  = Lennard-Jones parameter,  $p = c/a$  : axial ratio ; a and c are the unit cell parameters.

As the ultrasonic velocity is related to second order elastic constants, the anisotropic behaviour of the material alloy can be understood by knowing these velocities<sup>14</sup>. There are three types of velocities:- longitudinal, quasi-shear, and shear, depending on the mode of atomic vibrations<sup>15</sup>. These velocities vary with the direction of propagation of wave with respect to the unique axis of hexagonal crystal. The ultrasonic velocities as function of angle between direction of propagation and unique axis of hexagonal crystal are given as in ref<sup>16</sup>

$$V_1^2 = \{C_{33} \cos^2 \theta + C_{11} \sin^2 \theta + C_{44} + \{[C_{11} \sin^2 \theta - C_{33} \cos^2 \theta + C_{44} (\cos^2 \theta - \sin^2 \theta)]^2 + 4 \cos^2 \theta \sin^2 \theta (C_{13} + C_{44})^2\}^{1/2}\} / 2\rho \quad (3)$$

$$V_2^2 = \{C_{33} \cos^2 \theta + C_{11} \sin^2 \theta + C_{44} - \{[C_{11} \sin^2 \theta - C_{33} \cos^2 \theta + C_{44} (\cos^2 \theta - \sin^2 \theta)]^2 + 4 \cos^2 \theta \sin^2 \theta (C_{13} + C_{44})^2\}^{1/2}\} / 2\rho \quad (4)$$

$$V_3^2 = \{C_{44} (\cos^2 \theta + C_{66} \sin^2 \theta)\} / \rho \quad (5)$$

Where  $V_1, V_2, V_3$  are longitudinal, quasi-shear, and pure shear wave ultrasonic velocities.  $\rho$  and  $\Theta$  represent the density of material and angle with the unique axis of the crystal respectively. The Debye average velocity  $V_D$  is given by

$$V_D = \left\{ \frac{1}{3} \left( \frac{1}{V_1^3} + \frac{1}{V_2^3} + \frac{1}{V_3^3} \right) \right\}^{-\frac{1}{3}} \quad (6)$$

The Bulk modulus of these alloys can be calculated using the formula as in ref<sup>16</sup>

$$B = \frac{2}{9} \left( C_{11} + C_{12} + 2C_{13} + \frac{C_{33}}{2} \right) \quad (7)$$



**Table 1:** Second order elastic constants and bulk modulus (B) for  $Co_3-X$  (X= Mo,Nb,Ta) alloy at room temperature.


Alloy	$C_{11}$	$C_{12}$	$C_{13}$	$C_{33}$	$C_{44}$	$C_{66}$	Calculated bulk modulus $B \cdot 10^{10} \text{ Nm}^{-2}$	experimental bulk modulus. ref <sup>17</sup> $B \cdot 10^{10} \text{ Nm}^{-2}$
$Co_3Mo$	35.4	8.74	7.55	35.4	8.86	13.4	16.42	17.16
$Co_3Nb$	31.4	8.59	6.22	33.3	8.38	12.0	15.30	15.08
$Co_3Ta$	30.1	7.23	6.10	30.6	8.09	11.5	15.02	14.35

## 2. Result and Discussion

The unit cell parameters  $a$ , for  $Co_3Mo, Co_3Nb, Co_3Ta$  are  $2.574 \text{ \AA}, 2.604 \text{ \AA}, 2.594 \text{ \AA}$  and the axial ratios  $p$  are 1.632, 1.629, 1.629, respectively as in ref<sup>12</sup>. The evaluated value of the Lennard-Jones parameter  $b_0$ , for

these alloys (for  $m=6, n=7$ ) is  $3.632 \cdot 10^{-65} \text{ erg-cm}^7$ . The second order elastic constants using eq (2) and bulk modulus of elasticity using eq (7) are given in table.1. There exists a good agreement between the theoretically calculated values and the experimentally deduced values of the bulk modulus of elasticity for these alloys.

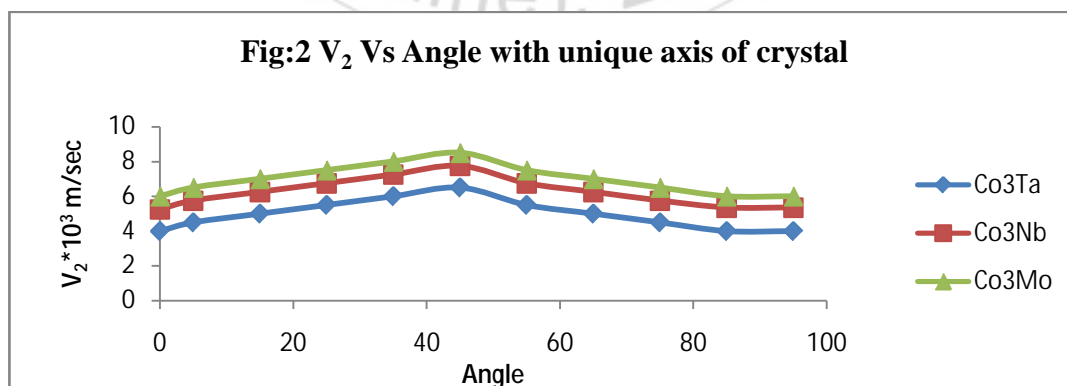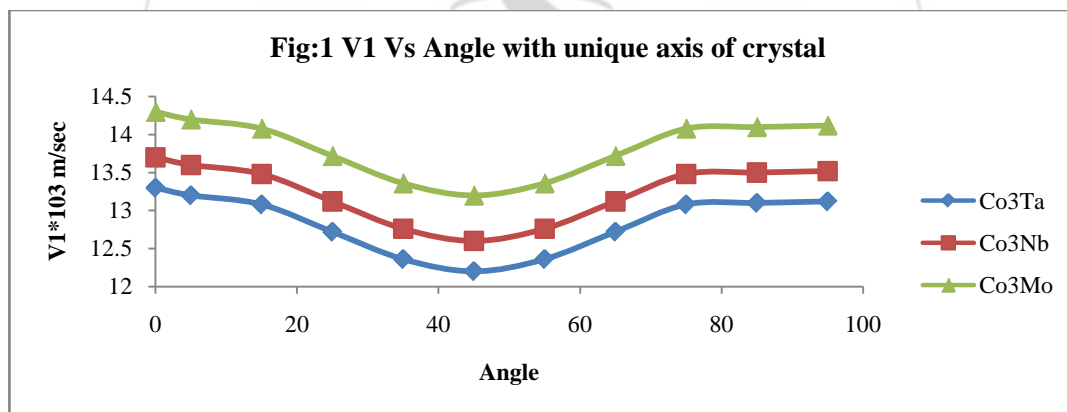

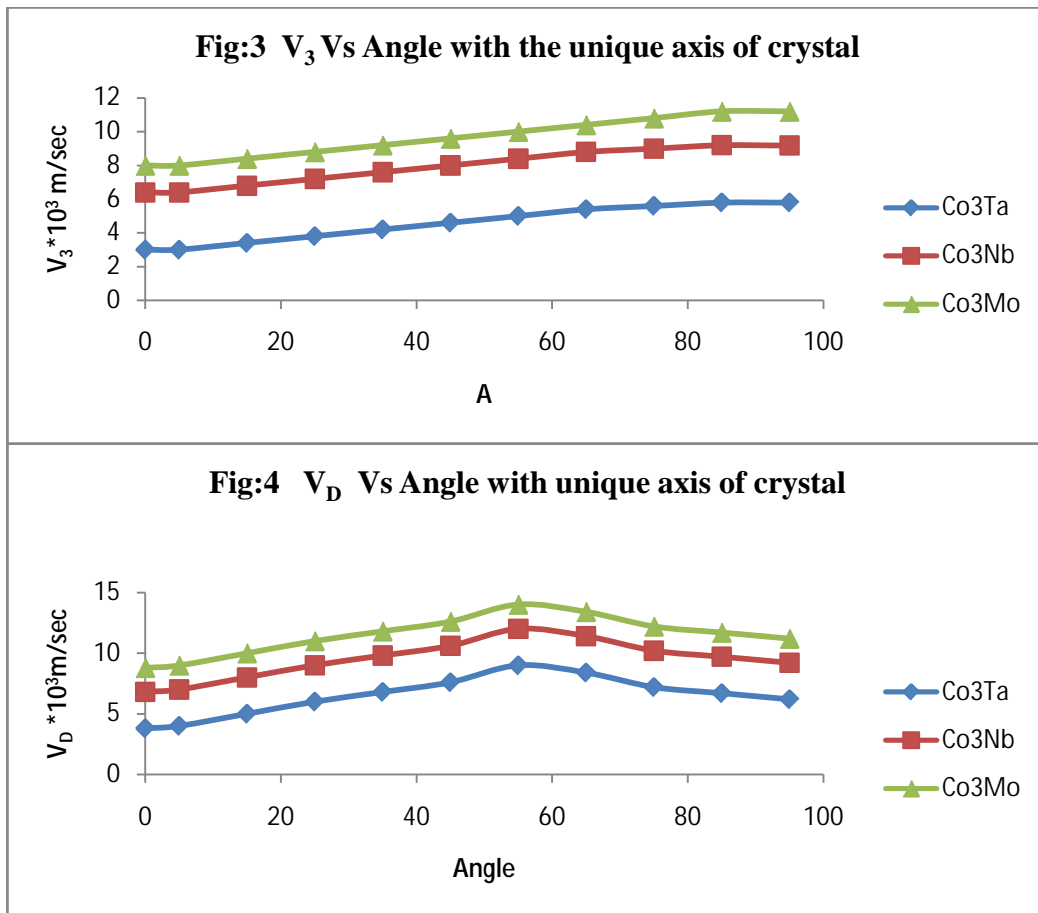

The orientation dependant ultrasonic velocities for these alloys are given graphically in figure 1-4. It is found that the velocities  $V_1$  and  $V_2$  have minima and maxima respectively for an angle of  $45^\circ$  with the unique axis of the hexagonal crystal. Velocity  $V_3$  goes on increasing as angle  $\Theta$  with unique axis increases. The magnitude of longitudinal velocity along (001) direction is largest for  $\text{Co}_3\text{-Mo}$  alloy as it has highest  $C_{33}$  value. The shear velocities  $V_2$  and  $V_3$  have nearly same magnitude at  $\Theta = 0^\circ$  and different at other angles. The Debye average velocity  $V_D$  has maxima at angle  $\Theta = 55^\circ$ , which is due to increase in longitudinal and pure shear wave velocity and decrease in quasi-shear wave velocity. As  $\text{Co}_3\text{-Mo}$  alloy has the maximum velocity, it has less defects in crystal structure, is supposed to be more ductile and stable alloy.

### 3. Conclusion

The present theoretical work to calculate second order elastic constants and the bulk modulus of elasticity is nearly accurate, which is evident from good agreement between theoretical and experimental values. The ultrasonic velocity is influenced by the elastic constants and density of material, and the direction of propagation of the wave. The (001) direction is the direction of symmetry as quasi-shear and shear waves have nearly same velocity magnitude along it. The high elastic constant and velocity for  $\text{Co}_3\text{-Mo}$  alloy makes it more suitable for industrial applications as compared to other chosen alloys. The inconsistent behaviour

of these angle dependant ultrasonic velocities could be attributed to the effect of the second order elastic constants of these alloys. These ultrasonic properties are useful for characterization of alloys and to determine their suitability for mechanical and industrial applications.

### References

- [1] Chaudhary.K.D ;Z.Physics.A155,290(1959)
- [2] Yadav.R.R , Gupta.A.K ; J.Phys.Stud.9,227(2005)
- [3] Kor.S.K , Tandon.U.S, Rai,G ;Phys.Rev.B6,2195(1972)
- [4] Kor.S.K , Singh.R.R ;Acta. Phys.Pol.A83,751(1993)
- [5] Yadav.R.R , Singh.D ;Intermetallics ,9,189(2001)
- [6] Singh.D , Yadawa.P.K ;Platinum metals Rev,54,172(2010)
- [7] Skriver.H.L ;Phys.Rev,B31,1909(1985)
- [8] Pettifor.D.G ;Comput.Coupling Phase Diagrams Thermochem,1,305(1977)
- [9] Was,G ; Prog.Surf.Sci,32,211(1989)
- [10] Zhang.Z.J, Bai.H.Y, Lui.B.X ; J.Appl.Phys,73.1703(1992)
- [11] Zhang.Z.J, Huang.X.Y ; Acta Mater,46,4189(1998)
- [12] Zhang.Z.J, Huang.X.Y ;Phys.Rev,B58,1185(1998)
- [13] Yadav.R.R , Singh.D, Pandey.D.K ;The Open Acoustic,J.2,61(2009)
- [14] Oligschleger.C, Reimann.S.M, Schober.H.R ;Phys.Rev, B53,6165(1996)
- [15] Yadav.R.R , Singh.D, Pandey.D.K ;Mat. Lett. ,61,4747(2007)
- [16] Shackelford.J.F ; Introduction to material science,3<sup>rd</sup> edi,Macmillan(1992)

- [17] R C Weast, Handbook of chemistry and physics, (Princeton Uni., 1988)
- [18] M Rabinovitz and A Pines, J. American Chemical Society. 91, 1585 (1969)
- [19] Yadawa. P.K ; "acoustic wave propagation in Ni<sub>3</sub>-R compounds". Pramana, 76, 4 (2011) 613-619.

