

Modelling of Intersatellite communication system using Mach-Zehnder Modulator

Pooja Sharma¹, Anuja Mishra², Prachi Agrawal³, Rahul Parganiha⁴

¹FET-SSTC, Bhilai
pjsharma288@gmail.com

²FET-SSTC, Bhilai
anujamishra.10@gmail.com

³FET-SSTC, Bhilai
agrawalprachi.292@gmail.com

⁴FET-SSTC, Bhilai
parganiha.rahul88@gmail.com

Abstract: *The Objective of this paper is to make readers understand the key terms related to Intersatellite optical wireless communication system to help them carry out their future project work. The concept of wireless communication system has paved its way in optical communication system replacing long lengthy fibers which were previously opted. This has enabled optical wireless systems to be used in free space communications as well. A network is required enabling communication between the satellites prevailing in space because of increasing number of satellites in free space. Higher data rates of Gbps can be achieved using Laser communication along with greater distance offered. The communication being carried out between the satellites in space via optical wireless systems is basically termed as Intersatellite Optical Wireless Communication (IsOWC). In this review paper, Intersatellite optical wireless communication (IsOWC) system modelling and simulation for performance characterization and estimation are specifically understood and discussed. The system parameters namely bit rates, receiver sensitivity and distance of LEO and GEO intersatellite links were found. The intersatellite link was designed and simulated using a known optical system simulator named OptiSystem by Optiwave.*

Keywords: (IsOWC) Intersatellite optical wireless communication, Intersatellite links (ISL), Free Space optics (FSO), Q-factor, Bit error rate (BER)

1. Introduction

For the research and communication purpose for the benefits of the mankind, the manmade satellites have been developed. A satellite is an object that orbits around another object in space. An intersatellite link is a communications link that connects two separate satellites directly. One satellite could have several links to numerous other satellites. Inter-satellite links are very important for communication of two satellites in same orbit or two different orbits. The present satellite communications system uses microwave technology for space-to-ground and geosynchronous satellite to low earth orbiting vehicles [15]. In the future system, the satellite to ground links would remain in the microwave regime but satellite-to-satellite communication will be governed by optical wireless links. The technology uses laser light of infrared wavelengths to transmit optical signals between two points via free space [16].

Laser communication is now able to send information at data rates up to several Gbps and at distance of thousands of kilometers apart [1]. This has open up the idea to adapt optical wireless communication technology into space technology; hence intersatellite optical wireless communication is developed. An overview of inter-satellite link is as in Figure 1.

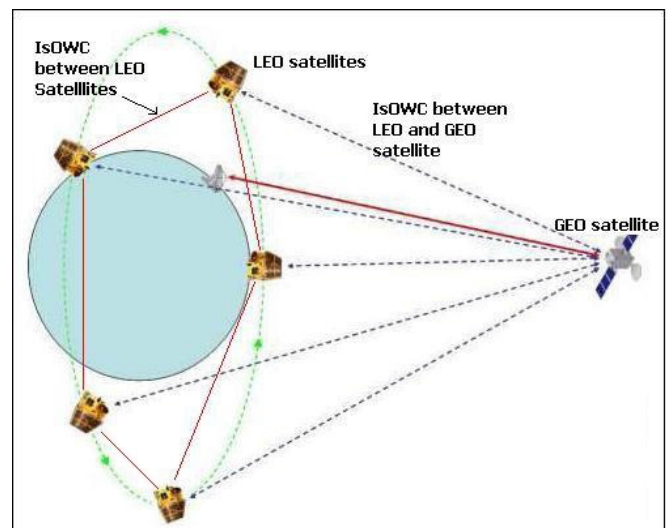


Figure1. Overview of IsOWC

FSO is a line-of-sight technology that uses lasers to provide optical bandwidth connections or FSO is an optical communication technique that propagate the light in free space means air, outer space, vacuum, or something similar to wirelessly transmit data for telecommunication and computer networking. The use of lasers is a simple concept similar to optical transmissions using fiber-optic cables; the only difference is the transmission media. Light travels through air faster than it does through glass, so it is fair to classify FSO as optical communications at the speed of the

light. FSO communication is considered as an alternative to radio relay link line-of sight (LOS) communication systems. The advantages of free space optics are:

1. No licensing requirement
2. non appearance of radio frequency and removal of the problem of radiation hazards
3. wide bandwidth which gives high data rates[3].

A. Mach-Zehnder Modulator

The application of electro-optic material to change the phase of an incoming optical signal is essentially the simplest and the most basic version of an integrated optical device. However, this phase modulation of an optical phase modulator can be further used for amplitude (intensity) modulation of light by implementing it in the principle of interference. An intensity modulator based on a Mach-Zehnder interferometer. The intensity modulation is obtained by creating phase differences between the two arms of the interferometer. The basic principle behind the Mach Zehnder Interferometer. Hence, the PSK output signal of the phase modulator can be converted into an amplitude shift keyed (ASK) optical signal using this device. The figure 2 below shows a schematic of the Mach Zehnder Interferometer: (diagram intended only for understanding and so not practical).

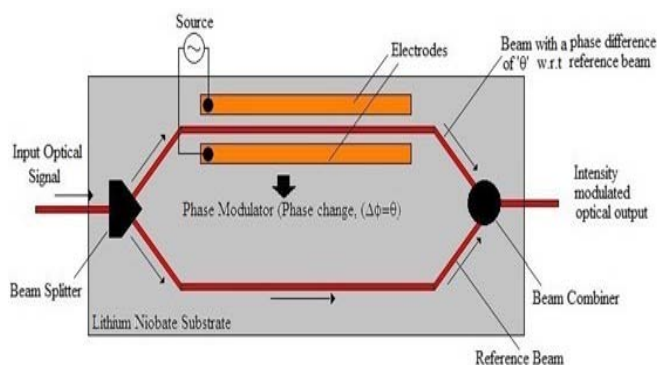


Figure 2. Mach-Zehnder Interferometer

The input optical signal beam is split into two parts at the two-way power divider and these beams travel equal distances through distinct paths until they recombine by interference at the other end in the beam combiner. However, the phase change in the two beams is different as they travel along the channel waveguides. One beam is allowed to travel undisturbed along the reference path and is known as the reference beam. The relative phase of the reference beam is assumed to be 0. The other beam travels through a phase modulator which changes the phase of the beam by some pre-determined amount, say θ and so, the relative phase difference between the two beams when they arrive at the beam combiner is θ . Depending on the value of θ these beams interfere either constructively or destructively and the output signal is obtained accordingly. For a value $\theta = \pi$, the two beams interfere destructively and the Mach Zehnder Interferometer acts as an inverter in case of a digital input at the source of the modulator. The input and output waveforms corresponding to this case are shown below in figure 3 :

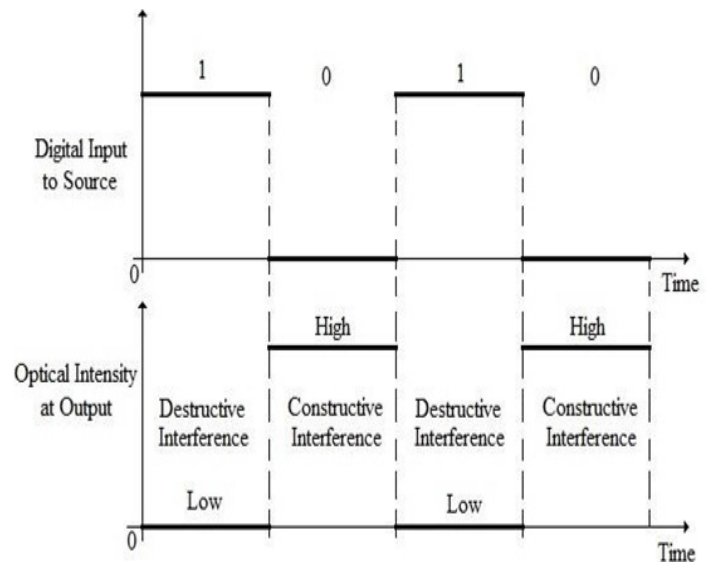


Figure 3. Output of Mach Zehnder Interferometer to digital input at the source

2. System Architecture :

The basic architecture used to model ISL system is shown in Figure 4. This gives an overview of proposed optical ISL system. The IsOWC system consists of transmitter, propagation medium and receiver which is shown in figure 4 where the transmitter is in the first satellite and the receiver is in the second satellite. The free space between the satellites is the propagation medium is the OWC channel that is used to transmit the light signal. Optical wireless communications uses light at near-infrared frequency to communicate. The IsOWC system is not much different from free space optics and fiber optic communication where the difference relies in the propagation medium. In the Optisystem software. The transmitter and receiver antennae are also assumed to be ideal. The OWC channel is considered to be outer space which is free from additional losses and attenuation factors but there will be some transmitter and receiver pointing errors [2] . The IsOWC transmitter receives data from the satellites Telemetry, Tracking and Communication (TT&C) system. The telemetry system collects data from sensors on board the satellite and sends these data via telemetry link to the satellite control center which monitors the health of the satellite. Tracking and ranging system located in the earth station provides the information related to the range and location of the satellite in its orbit. The command system is used for switching on/off of different subsystems in the satellite based on the telemetry and tracking data.

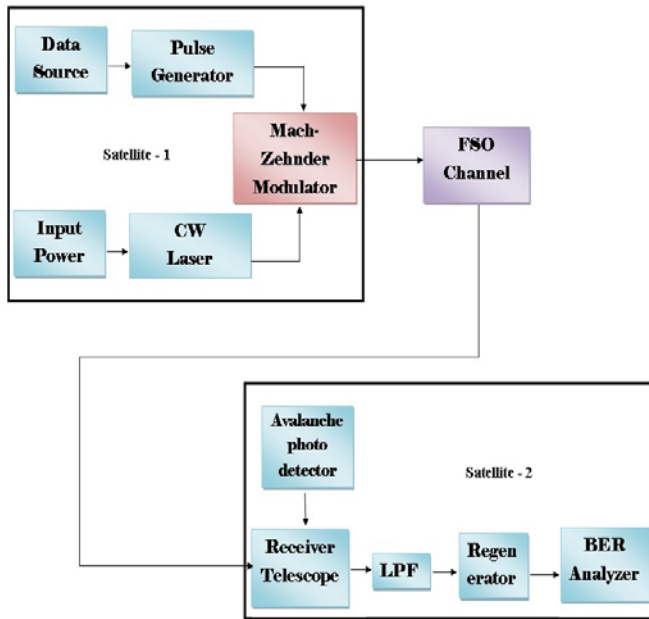


Figure 4. Design of Inter Satellite Optical Wireless Communication System

Light source is the most important component in optical signal since communication is done by transmitting light. Light emitting diode and laser diode are two types of optical light source commonly used in optical communication. The output light emitted by the laser diode is monochromatic, coherent and has high radiance which makes it suitable for long distance free space transmission [5]. The light generated by the laser can travel much further than the light emitted by LED. Hence, a CW laser diode is used for IsOWC system. The electrical signal from TT&C system and optical signal from the laser will be modulated by an optical modulator before it is transmitted out to space. An optical modulator varies the intensity or amplitude of the input light signal from CW laser according to the electrical signal. This is done by changing optical parameters such as refractive index, reflection factor and transmission factor of the optical modulator that is made from fiber waveguides. Different from free space optics that is subjected to many losses due to weather and atmospheric attenuation, the optical wireless communications channel is considered as vacuum and free from atmospheric losses. At an ideal case, the only cause of signal attenuation is the distance of the transmission. Optical antenna or optical lenses can be used at the transmitter and the receiver. Therefore, the free space loss is taken as 0 dB/km of optical wireless channel various in our proposed model. The optical antenna allows wider light beam divergence and detection[6]. An optical antenna is actually a lens or a telescope that is placed before and after the transmission medium to increase the signal divergence as shown in Figure 5. The receiving end of the IsOWC system consists of an Avalanche photodiode and a low pass filter. Amplification in APD photo detector or avalanche phenomenon occurs when charged electrons are introduced in such high electric field area and collide with neutral semiconductor atoms, thus generating other carriers. This process is then repeated to effectively amplify the limited number of carriers [7]

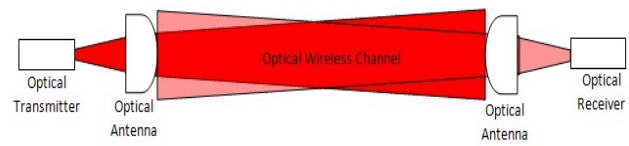


Figure 5. Optical antenna

3. Discussion:

1. Performance analysis of the optimized link at wavelength of 980nm and 1550nm

An inter-satellite optical wireless system is designed with the help of OPTI-SYSTEM simulator consisting of two satellites with a space difference of 1300 km exchanging externally modulated optical data at 3 Gbps through free space medium at operating wavelength of 980 nm and 1550 nm [7]. Table I shows numerical results for the performance analysis of link at varying wavelength of 980 nm and 1550 nm between two satellites at the distance of 1300 km at data rate 3 Gbps.

Table: 1
Performance analysis of the link at wavelength of 980 nm and 1550 nm

| S.No | Range (km) | Wavelength (nm) | Q Factor | BER |
|------|------------|-----------------|----------|----------------------------|
| 1. | 1300 | 980 | 7.30323 | 1.25545×10^{-013} |
| 2. | 1300 | 1550 | 14.4179 | 1.58648×10^{-047} |

2. Performance analysis of the optimized link at wavelength of 980nm by using modulation formats

An inter-satellite optical wireless system is designed with the help of OPTI-SYSTEM simulator consisting of two satellites with a space difference of 1700 km exchanging externally modulated optical data at 3 Gbps through free-space medium at operating wavelength of 980 nm by using two modulation formats i.e. NRZ and RZ [12]. Table II shows the performance analysis of link by using two modulation formats at wavelength of 980nm between two satellites at the distance of 1700 km at data rate 3 Gbps.

Table: 2
Performance analysis of the optimized link at wavelength of 980 nm by using modulation format

| S.No | Range (km) | Modulation formats | Q Factor | BER |
|------|------------|--------------------|----------|---------------------------|
| 1. | 1700 | NRZ | 13.4289 | 1.6803×10^{-041} |
| 2. | 1700 | RZ | 10.095 | 2.8934×10^{-025} |

3. Comparison between DPSK and QPSK

Free-space optical communication systems employing QPSK modulation for data rate 2.5 Gbps and gives significant comparison with DPSK modulation and every component requirement is presented [8]. QPSK is simulated using the

Optisystem software and its various parameters such as Q factor, BER, Eye Diagram, etc were compared for different categories of coding such as QPSK and DPSK Studies shows (Table III) that in general, we can operate better by using QPSK modulation in high power than DPSK in Free space.

Table: 3
Comparison between QPSK and DPSK

| Parameter | QPSK | DPSK | Condition |
|--------------|----------------------------|----------------------------|------------------------------------|
| Max Q Factor | 9.25 | 7.94 | DataRate = 2.5Gbps Power = 10mW |
| Min BER | 1.05×10^{-20} | 9.45×10^{-18} | |
| Eye Height | 4.97788×10^{-005} | 2.92781×10^{-005} | |

4. IsOWC system designed was modeled and simulated for performance characterization. Several parameters of the system were varied to obtain optimum system performance. From the simulation, two observation was done which is the relationship of the Q-factor and the bit rate at varying distance and also the relationship between Q-factor and the signal wavelength.

a. Relationship between Q-factor and Bit rates with Distance of Intersatellite Link

By varying the bit rate and the distance between the satellites in the IsOWC system, the system performance in terms of Q-factor was obtained [9]. The distance was set from 0km up to 5000km and the input power is set at a constant value of 10dBm and signal wavelength of 1550nm is used. The bit rate was set at 5 levels which are 1Mbps, 10Mbps, 100Mbps, 1Gbps and 10Gbps.

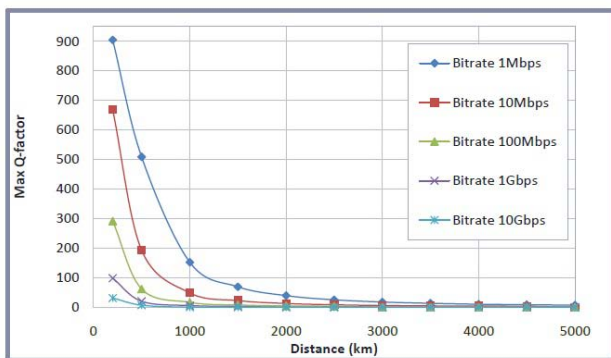


Figure 6. Maximum achievable Q-factor for variable distance at 1550nm IsOWC link for bitrate up to 10Gbps

From the graph of Figure 6, it can be observed that at longer distance the maximum Q-factor of the system decrease[11]. This shows that the error in the received signal increases as the distance increase. The graph also shows that with higher bit rate, maximum Q-factor is reduced[14]. At the distance of 5000km, only the 1Mbps can be used as the Q-factor received does not equals to zero. It was also observed that data transmission at high bit rate of 10Gbps can only be used for shorter distance of less than 500km. This however, can be increased by using higher optical input power or by improving the modulation technique.

b. Relationship between Q-factor and Signal Wavelength

At long-haul transmission, the common wavelength used is 1550nm but shorter wavelengths can also be used.

Table: 4
Maximum Q-factor recorded for respective signal Wavelengths

| Signal Wavelength (nm) | Maximum Q-factor |
|------------------------|------------------|
| 850 | 82.12 |
| 950 | 70.25 |
| 1550 | 32.72 |

From the table IV, it can be observed that at higher wavelength, more error is produced due to lower value of Qfactor[13]. However, by using longer wavelength, the effect of scattering can be reduced. Attenuation due to Rayleigh and Mie scattering is inversely proportional to the wavelength. Therefore it is assume that there are no particles obstructing the light signal, but small and large particles by the means of space dusts and meteorites can happen to be within the light signals way. Therefore, the longest possible wavelength is to be used which is 1550nm. Another reason of using 1550nm is because the compatibility with current technology and devices.

c. Relationship between Diameter of Optical Antenna with Received Power and Distance

From the figure 7 we have observed that the power received is increasing with the increment of optical antennae diameter. However, increasing the distance between the satellites reduce the level of received power. Optical received power can be associated with the receivers sensitivity where increasing the received power would result in increasing the sensitivity. Therefore it can be concluded that by increasing the diameter optical antenna ,the receivers sensitivity is also increased. It can also be conferred that lower sensitivity is obtained for longer intersatellite distance. Higher sensitivity will allow more throughputs and reducing the error received by the system.

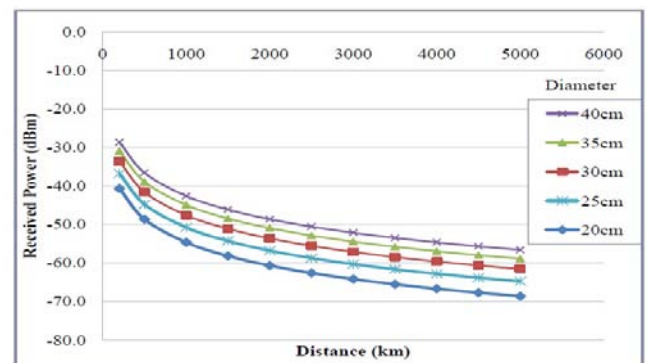


Figure 7. Received power for respective optical antenna diameter at distance up to 5000km and input power of 10dBm.

4. Conclusion:

Satellite used in space to perform many application for human being. Wireless Communications (IsOWC) can provide intersatellite communication at high speed and achieve farther distance compared to RF links. The advancement in satellite communication technology provide cellular services for people at many places. In this paper, inter-satellite links and application of optical wireless communication were fully studied. The conclusions of this paper are as the followings:

- I. The performance of intersatellite communication for lower bit rate is better for particular optimum distance range.
- II. There are many effects of scattering and compatibility at longer signal wavelength but we can reduce such type of effects at 1550nm wavelength.
- III. The sensitivity of the receiver can be increase by using the different optimum data rates.
- IV. The requirement of power for multiple channel are lower so that we can reduce the effect of laser power.

5. Future work :

Intersatellite communication is used primarily for “networking” a constellation of satellites at data rate up to many Gbps. It is expected that the parameters like size, weight, power and cost can be optimized in future satellite communication. FSO can be replaced by combination of Hybrid FSO/RF links . There more topics and areas that can be improved for this project. Due to that, the following topics are recommended for the IsOWC and intersatellite communication system improvements:

1. Path prediction model for intersatellite optical communication link
2. Development of intersatellite optical data network protocol
3. System Quality of Service (QoS) performance analysis by comparing to RF links

References

- [1] Isha Aggarwal¹, Paras Chawla², Rohan Gupta³, (2013) “Performance evolution of inter-satellite free space optical communication system with varied parameters and transceiver diversity”, ISSN 2231-1297, volume 3, number 7.
- [2] Gaurav Soni¹ and Sanandeep Singh², (Sep.2013). “Pointing error evaluation in FSO link”, Communication and Computing (ARTCom 2013), Fifth International Conference on Advances in Recent Technologies ,20-21.
- [3] Shlomi Arnon, (july 2003) IEEE transactions on wireless communications . “Optimization of Urban Optical Wireless Communication systems”, vol.2, no. 4 .
- [4] Jaz M.1, Ghassemlooy², Z. Ansari³, S. Adebajo⁴, O., (2010) . “Experimental investigation of the performance of different modulation techniques under controlled FSO turbulence channel”, 5th International Symposium Telecommunications (IST) .
- [5] Vishal Sharma¹ and Amandeep Kaur², (2013). “Challenging issues in inter-satellite optical wireless communication systems (IsOWC) and its mitigation techniques”, Proc. of Int. Conf. on Advances in communication, network and computing.

- [6] A. Jamalipour, (1999) . “Low Earth Orbital Satellites for Personal Communication Networks”, Artech House Publisher, UK.
- [7] Navjot Kaur¹ and Gaurav Soni², (2014) IEEE . “Performance analysis of inter-satellite optical wireless communication (IsOWC) system at 980 nm and 1550 nm wavelength”, 978-1-4799-6629-5/14.
- [8] A Penchala Bindushree¹, Nataraju A. B.², Vijesh T V³, Laxmiprasad A S⁴, (2014) . “Design And Simulation Of QPSK Modulator For Optic Inter Satellite Communication”, ISSN 2277-8616.
- [9] Aida Hasfiza Hashim¹, Farah Diana Mahad², Sevia M. Idrus³ and Abu Sahmah M. Supa’at⁴, (2010) IEEE. “Modeling and Performance Study of InterSatellite Optical Wireless Communication System”, ICP2010-64.
- [10] Resmi R. S.¹, Rafeekha M. J.², (2013) . “Investigations of Bit rates in Optical Intersatellite Wireless Links”, ISSN:2319-7064.
- [11] Ravi Gupta¹, Sandhya Sharma², Manoj Kumar Sharma³, (Jun 2014) . “Modification in Parameter of Intersatellite Communication using Multiple Transmitter and Receiver”, ISSN: 2231-5381, Volume 12 Number 10.
- [12] Navjot Kaur¹, Gaurav Soni², (January 2015) . “Performance analysis of inter-satellite optical wireless communication (IsOWC) system by using NRZ and RZ modulation”, ISSN:2250-3153, Volume 5, Issue 1.
- [13] Resmi R. S.¹, Rafeekha M. J.², (January-2015). “Performance Evaluation of Optical Intersatellite Links with Varied Parameters”, ISSN:2278- 0181, Vol. 4 Issue 01.
- [14] B. Patnaik¹ P.K. Sahu², (2012) . “Inter-satellite optical wireless communication system design and simulation”, ISSN 1751-8628.
- [15] Naresh kumar, (2014) . “Enhanced performance analysis of intersatellite optical-wireless communication (IsOWC) system”, sciencedirect journal, Optik volume 125, pp 1945-1949.
- [16] Vishal Sharma¹ and Amandeep Kaur², (2014). “Modeling and simulation of long reach high speed inter-satellite link (ISL)”, sciencedirect journal, Optik volume 125, pp 883-886.

Author Profile



Pooja Sharma received the B.E. degree in Electronics & Telecommunication Engineering from the Chhattisgarh Swami Vivekanand Technical University, Bhilai CG in 2014 and pursuing M.E. degree in Communication Engineering from the Chhattisgarh Swami Vivekanand Technical University, Bhilai CG . Currently, she is a final year student in the Department of Electronics & Telecommunication at Faculty of Engineering & Technology, Shri Shankaracharya Technical Campus Bhilai CG. Her current research interests are Photonics, Non Linear Fiber Optics and Optical Communication.



Anuja Mishra received the B.E. degree in Electronics & Telecommunication Engineering from the Chhattisgarh Swami Vivekanand Technical University, Bhilai CG in 2014 and pursuing M.E. degree in

Communication Engineering from the Chhattisgarh Swami Vivekanand Technical University, Bhilai CG. Currently, she is a final year student in the Department of Electronics & Telecommunication at Faculty of Engineering & Technology, Shri Shankaracharya Technical Campus Bhilai CG. Her current research interests are Photonics, Non Linear Fiber Optics and Optical Communication.



Prachi Agrawal received the B.E. degree in Electronics & Telecommunication Engineering from the Chhattisgarh Swami Vivekanand Technical University, Bhilai CG in 2014 and pursuing M.E. degree in

Communication Engineering from the Chhattisgarh Swami Vivekanand Technical University, Bhilai CG. Currently, she is a final year student in the Department of Electronics & Telecommunication at Faculty of Engineering & Technology, Shri Shankaracharya Technical Campus Bhilai CG. Her current research interests are Photonics, Non Linear Fiber Optics and Optical Communication.



Rahul Parganiha received the B.E. degree in Electronics & Telecommunication Engineering from the Chhattisgarh Swami Vivekanand Technical University, Bhilai CG in 2012 and pursuing M.E. degree in

Communication Engineering from the Chhattisgarh Swami Vivekanand Technical University, Bhilai CG. Currently, He is a final year student in the Department of Electronics & Telecommunication at Faculty of Engineering & Technology, Shri Shankaracharya Technical Campus Bhilai CG. His current research interests are Photonics, Non Linear Fiber Optics and Optical Communication.