

Appropriateness Investigations on Nimonic 901 and Rane 77 made Guide Vanes of Gas Turbine with Showerhead Cooling

Dr. R. Saravanan¹, M. Karuppasamy²

¹Principal and Professor (Mechanical Engineering), Elenki Institute of Engineering and Technology,
Hyderabad -532019, Telungana State, India

²Associate Professor and Head of the Department of Mechanical Engineering, S.Veerassamy Chettiar College of Engg. and Tech.,
Puliangudi-627855, Tamil Nadu, India

Abstract: Gas turbines are under the class of high temperature application thermal device. Stability of the material at elevated temperature is difficult to predict conventional methods. The design, engineering offers solution for such cases. The stability can be experimented for such cases using modeling and simulation by means of design engineering softwares. Structural stability of the material depends on the shape, material and load. It is required to analyze the structural stability of such gas turbine components at elevated temperature. The hollow portion like cooling design and greatly influences on the structural stability of them. This research focuses on the material influence on guide vane with showerhead type cooling design. The high temperature materials like Nimonic 901 and Rane 77 were considered for this analysis. The Pro –E and ANSYS R14 were employed for modelling and FEM analysis respectively.

Keywords: showerhead cooling, guide vane, gas turbine, Nimonic 901, Rene 77

1. Introduction

Gas turbine applications are to be expected at the industries like, power generation, locomotive, aircraft, marine propulsion, and other industrial prime movers. The aim of higher output and thermal efficiency leads to higher operating temperature of thermal devices like gas turbine. In gas turbine the inlet temperature is about 1500°C [1-3]. In some special cases like aerospace, it is much higher, i.e., 1,727°C [4-6] as well as with the higher operating pressure ratio at compressor about 50 [6]. In such circumstances the components often encounter the thermal damages as well as other damages like melting, corrosion, oxidation and erosion [7], the degradation of local or global structural strengths of blades, vanes and other components and it was estimated that half of the lifespan of the blades gets reduced due to small temperature difference by improper cooling [3,6,9]. The specific damages are: blade trailing-edge cracks [8], buckling and risk of blade failure [11], thermal-fatigue [8,10,11]. Hence the perfect cooling is insisted for avoiding them. Many studies were conducted on optimization of lip thickness to slot height ratio (t/H) in trailing edge cooling of blades and vanes [12 -17] in which Kacker et al. [12,13] considered lip thickness constant to estimate film cooling effectiveness, Taslim et al [14,15] varies slot geometries and blowing ratios. The t/H ratio from 0.5 to 1, decrease the overall film-cooling effectiveness by about 10% [14-16]. The decreases of t/H ratio, increases the film-cooling effectiveness [17-19]. [20] considered a rectangular divergent channel which consists of serpentine shape with ribs, dimples/protrusions, guide vanes, and pin fins at the tip turning the region for his heat transfer studies. [21] studied the cooling performance at tip surfaces of guide vanes and blades at turning regions and insisted the importance of proper design to obtaining desired effects. [22] recommended installing guide vanes in the tip turning regions most suitable

way to improve cooling of tip surfaces. [23] insisted that selection appropriate cooling technique with respect to



Figure 1: Fixed blade (Guide vane)

configuration is must. The authors suggested two pass channels cooling at moving blades. This research work investigates with materials behaviors at elevated temperature for impingement cooling design on gas turbine fixed blade (guide vane). The Pro-E and ANSYS are employed to design and analysis. ANSYS is generally the preferred tool for analyzing structural stability. [24] used CATIA and ANSYS to design and investigate the structural stability of various components of Two-Wheeled Inverted Pendulum. In later [25] investigated the suitability of Kevlar29/epoxy composite for drive shaft. The influences of

cooling designs, such as impingement and shower head type on gas turbine guide vanes which are made up of Nimonic 901[26], RENE 77 [27], CMSX 4 [28] were reported. The sample guide vane of gas turbine is shown in Fig.1. This research investigates the suitability of material for the specified case. Here the case is guide vane of the gas turbine with showerhead cooling design and predefined shape, profiles and dimensions.

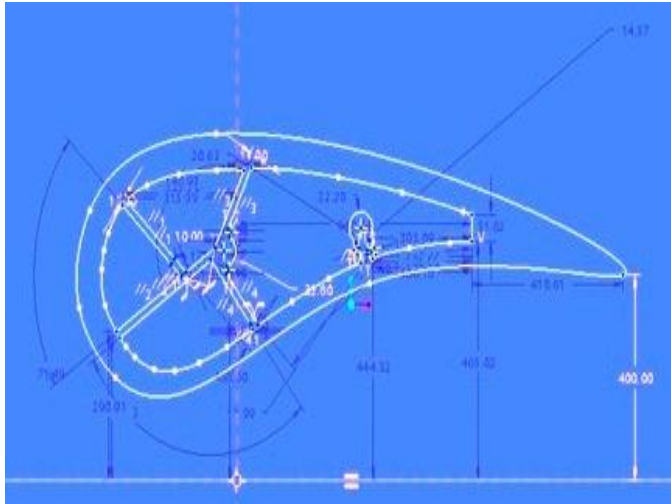


Figure 2: 2D model of Guide vane

2. Materials and Methods

The super alloys which specifically suitable for high temperature applications like Rene77 and NIMONIC 901 were considered in this investigation. The design approach is used for investigating the structural stability of gas turbine guide vanes at elevated temperature.

2.1 Nickel Alloy 901/ Nimonic 901

It is also nickel based super alloy widely applicable at high temperature environments. Superior creep resistance, high yield strength, good forging characters, etc. at elevated temperature are the merits of this material. Its significant properties were included in the structural stability analysis by using ANSYS.

2.2 RENE 77

It is preferred for high temperature applications about 1000°C like aviation, petroleum, gas turbine, space flight, ship, etc. because of its significant properties at elevated temperatures like excellent oxidation resistance, with stand at long term stress, creep properties, reliable in physical and chemical properties, good impact and toughness strengths etc. values of such unique properties were included in the analysis by using ANSYS.

2.3 Structural Analysis

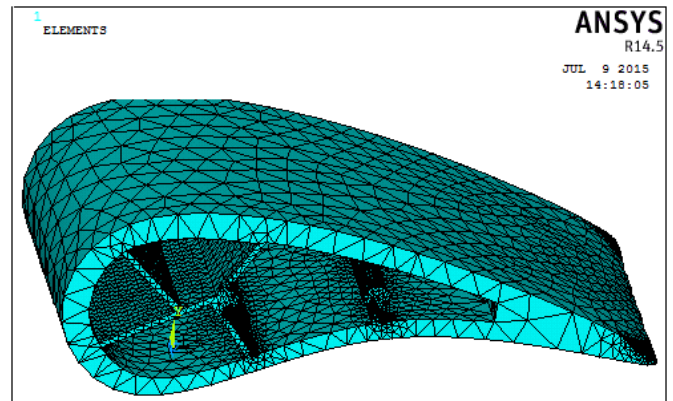


Figure 3: Meshed model of Guide vane.

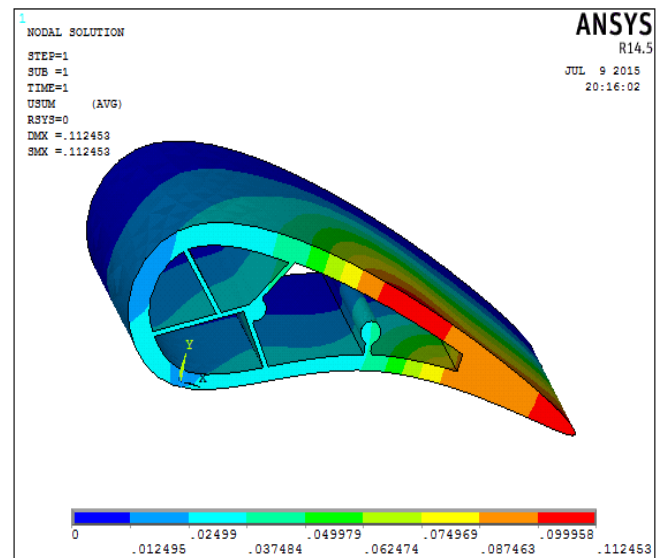


Figure 4: The displacement analysis for NIMONIC 901 blade

The modelling works were carried out Pro/E and analysis works were done at ANSYS 14.5 work bench. The dimensional particulars of the guide vane with Showerhead cooling design is shown in Figure 2. The 3D meshed model is presented in Figure 3. The structural analysis like stress analysis, strain analysis and displacement analysis were considered. The comparative study of materials involved in manufacture them is focused on this research. The young's modulus 201000 Mpa, material density 0.0000814 kg/mm3, Poisson Ratio 0.24 were considered for NIMONIC 901 made blades. In case of RENE 77 made blades, the young's modulus 200000 MPa, Poisson Ratio 0.30, material density 0.000077 kg/mm3. In the meshed model made with 186 nodes, and pressure 0.188 N.mm2. The displacement analysis carried at ANSYS 14.5 work bench. The displacement with respect to turbine load was observed and shown them for

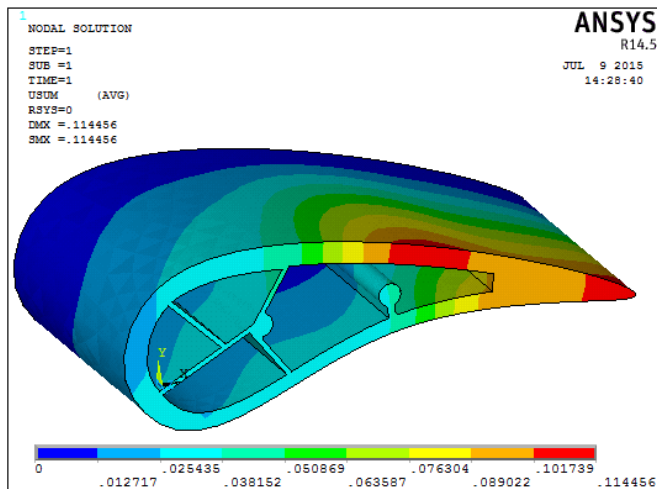


Figure 5: The displacement analysis for RENE 77 blades

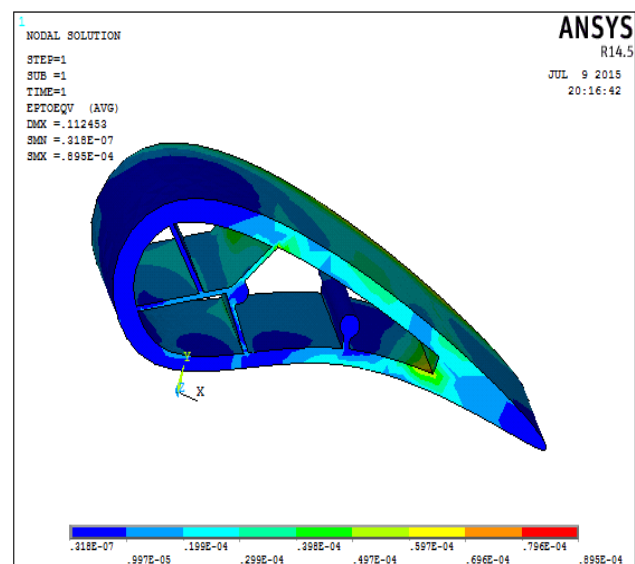


Figure 8: The strain analysis for NIMONIC 901 blade

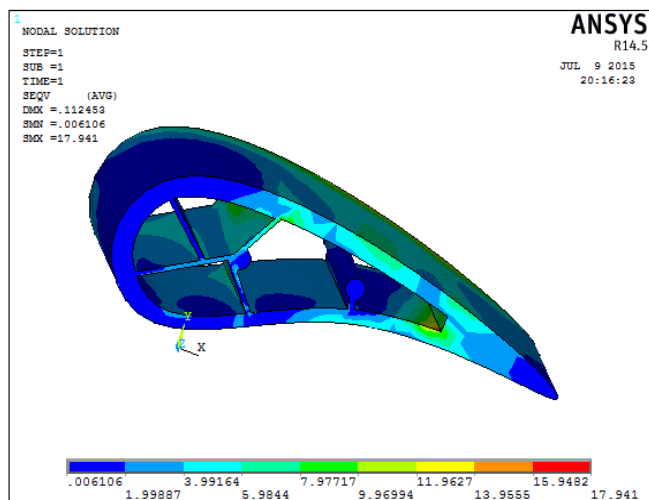


Figure 6: Stress analysis for NIMONIC 901 blade

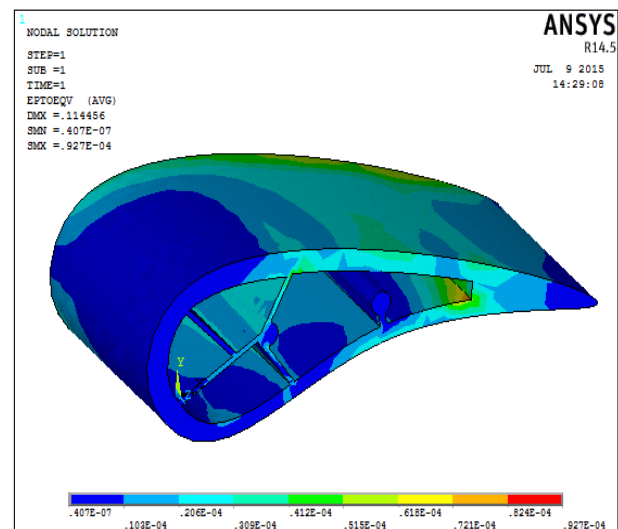


Figure 9: The strain analysis for RENE 77 made blades

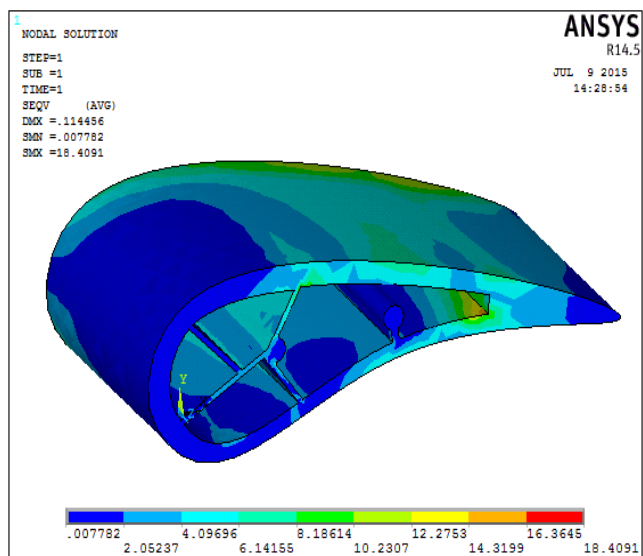


Figure 7: Stress analysis for RENE 77 blade

NIMONIC 901 made blades in Figure 4 and for RENE 77 made blades in Figure 5. The maximum displacements were observed on the concave side of cooling passage near by its sharp turning. The stress analysis for the above said blades (Figure 6 for NIMONIC 901 made blades and Figure 7 for RENE 77 made blades).

Table 1: Results of Structural analysis

Guide Vane made up of	Displacement (mm)	Stress (N/mm ²)	Strain
NIMONIC-901	0.11245	17.941	8.95E-05
RENE-77	0.11446	18.4091	9.27E-05

3. Results and Discussions

The influence of NIMONIC-901 and RENE 77 materials for fabricating gas turbine guide vanes with the showerhead

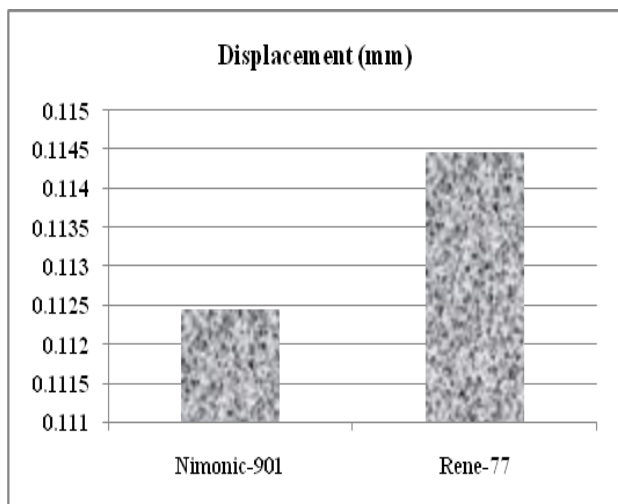


Figure 10: The Results of Displacement analysis

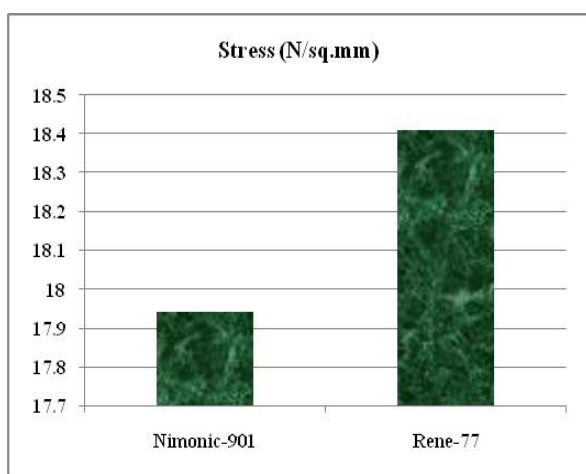


Figure 11: The stress of Displacement analysis

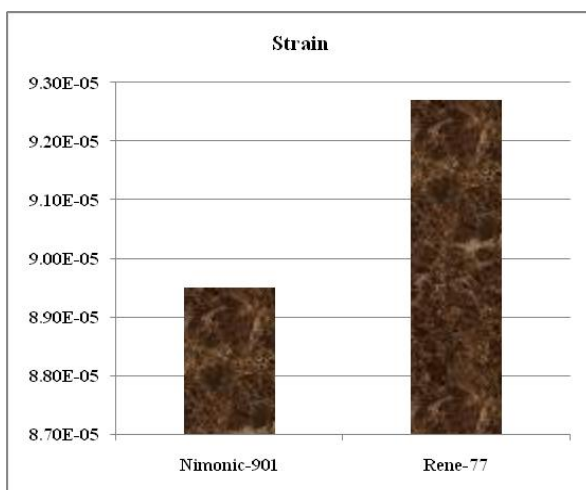


Figure 12: The Results of strain analysis

cooling design was investigated. The results are furnished in the Table1 and diagrammatically illustrated in Figure 10 for displacement analysis, Figure 11 for stress analysis and the Figure12 for strain analysis. According the investigated results both the materials are satisfied for the tested condition. RENE 77 made blades are little more flexible and little more stress bearing capacity also than NIMONIC-901 (Refer Figure 10 to Figure 12). The higher values of stress, strain and displacements were noticed at a right

turning of cooling design and at thin sections of convex portions. The design may avoid the sharp turning and right turning for improving the stability of a avoid to forming stress concentration.

4. Conclusion

This research investigated the influence of materials of gas turbine fixed blades with their pre-designed shower head cooling design. The results were discussed. Both NIMONIC-901 and RENE 77 materials are satisfying the basic requirements of the gas turbine fixed blades. But for this specific cooling design and the profile of the fixed blade considered in this analysis, the RENE 77 material made fixed blades are a little more flexible as well as little extra stress bearing capacity than The NIMONIC-901 made blades. This decision may apply to the specific design of the blade, cooling type and dimensions. In future research the global deacon may be arrived with testing various blades of the same shape and cooling design.

5. Acknowledgements

The authors acknowledge, the Chairman, Mr.E.Sadasiva Reddy, the Secretary, Mr.E.Dayakar Reddy, The Director Dr.M.Sambasiva Reddy and The Advisor, Dr.D.Ravender Reddy of Ellenki Group of Institutions for their continuous support and encouragement for our research.

References

- [1] J. C. Han and S. Ekkad, "Recent Studies in Turbine Blade Film Cooling", J. Rotating Machinery, 7(1), pp.21–40, 2001.
- [2] J. C. Han, "Recent Studies in Turbine Blade Cooling", J. Rotating Machinery, vol. 10, no. 6, p. 443–457, 2004.
- [3] Facchini B, Innocenti L, Tarchi L. Pedestal and Endwall Contribution in Heat Transfer in Thin Wedge Shaped Trailing Edge. ASME. Turbo Expo: Power for Land, Sea, and Air, 3, pp.101-111, 2004.
- [4] Martini P, Schulz A, Wittig S. Experimental and Numerical Investigation of Trailing Edge Film Cooling by Circular Coolant Wall Jets Ejected From a Slot With Internal Rib Arrays. ASME. Turbo Expo: Power for Land, Sea, and Air, Parts A and B, 5, pp.71-79, 2003
- [5] P. Martini and A. Schulz, "Experimental and Numerical Investigation of Trailing Edge Film Cooling by Circular Wall Jets Ejected from a Slot with Internal Rib Arrays", J. Turbomachinery. 126(2), pp.229– 236, 2004.
- [6] Sunden B, Xie G. "Gas turbine blade tip heat transfer and cooling; a literature survey. Heat Transf Engineering; 31, pp.527-554, 2010.
- [7] T. Horbach, A. Schulz and H. -J. Bauer, "Trailing Edge Film Cooling of Gas Turbine Airfoils – External Cooling Performance of Various Internal Pin Fin Configurations," J. Turbomachinery, 133 (94), pp.041006-1 – 041006-9, 2011.
- [8] Z. Yang and H. Hu, "An Experimental Investigation on the Trailing-edge Cooling of Turbine Blades," J. Propulsion and Power Research, 1(1), pp.36–47, 2012.

- [9] Facchini B, Simonetti F, Tarchi L, "Experimental Investigation of Turning Flow Effects on Innovative Trailing Edge Cooling Configurations With Enlarged Pedestals and Square or Semicircular Ribs", ASME. Turbo Expo: Power for Land, Sea, and Air, Heat Transfer, Parts A and B, pp.795-806, 2009.
- [10] J. Choi, S. Mhetras, J. -C. Han, S. Lau and R. Rudolph, "Film Cooling and Heat Transfer on Two Cutback Trailing Edge Model with Internal Performance Blockages", J. Heat Transfer, 130(1), pp.012201-012213, 2008.
- [11] L. Brundage, M. W. Plesniak, P. B. Lawless and S. Ramadhyani, "Experimental Investigation of Airfoil Trailing Edge Heat Transfer and Aerodynamic Losses", J. Experimental Thermal and Fluid Science, 31(3), pp.249-260, 2007.
- [12] S. C. Kacker and J. Whitelaw, "The Effect of Slot Height and Slot-Turbulence Intensity on the Effectiveness of the Uniform Density, Two Dimensional Wall Jet". J. Heat Transfer, 90(4), pp.469-475, 1968.
- [13] S. C. Kacker and J. H. Whitelaw, "An Experimental Investigation of Slot Lip Thickness on Impervious Wall Effectiveness of the Uniform Density, Two-Dimensional Wall Jet", J. Heat and Mass Transfer, 12(9), pp.1196-1201, 1969.
- [14] N. E. Taslim, S. D. Spring and B. P. Mehlmann, (1990) "An Experimental Investigation of Film Cooling Effectiveness for Slot Various Exit Geometries", Journal of Thermophysics and Heat Transfer, 6(2), pp.302-307.
- [15] N. E. Taslim, S. D. Spring and B. P. Mehlmann, (1992), "Experimental Investigation of Film Cooling Effectiveness for Slot of Various Exit Geometries", J. Thermophysics and Heat Transfer, 6(2), pp.302-307.
- [16] F. J. Cunha and M. K. Chyu, (2006), "Trailing-Edge Cooling for Gas Turbines", J. Propulsion and Power, 22 (2), pp.286-300.
- [17] R. J. Goldstein, (1971), "Film Cooling", J. Advance Heat Transfer, 7, pp.321-379.
- [18] S. Sivasegaram and J. Whitelaw, (1969), "Film Cooling Slots: The Importance of Lip Thickness and Injection Angle", J. Mechanical Engineering Science, 11(1), pp.22-27.
- [19] W. Burns and J. Stollery, "The Influence of Foreign Gas Injection and Slot Geometry on Film Cooling Effectiveness", J. Heat and Mass Transfer, 12(8), pp.935-951, 1969.
- [20] Lee MS, Jeong SS, Ahn SW, Han JC, "Effects of angled ribs on turbulent heat transfer and friction factors in a rectangular divergent channel", Int J Therm Sci. 84, pp.1-8, 2014.
- [21] Xie Gongnan, Zhang Weihong, Sund_en Bengt, "Computational analysis of the influences of guide ribs/vanes on enhanced heat transfer of a turbine blade tip-wall", Int J Therm Sci. 51, pp.184-194, 2012.
- [22] Lei Jiang, Li SJ, Han JC, Zhang L, Moon HK, "Effect of a turning vane on heat transfer in rotating multipass rectangular smooth channel", J Thermophys Heat Transf. 28(3), pp.417-427, 2014.
- [23] Wang Chenglong, Wang Lei, Sund_en Bengt, "Heat transfer and pressure drop in a smooth and ribbed turn region of a two-pass channel", Appl Therm Eng. 85: 225-233, 2015.
- [24] R. Saravanan, R. Pugazhenth, P. Vivek and M. Santhanam, "Design and Simulation of a Two-Wheeled Inverted Pendulum - a Balanced, Easy Moving Vehicle for the Material Handling", American-Eurasian Journal of Scientific Research. 11(3), pp.189-198, 2016.
- [25] R. Saravanan, P. Vivek, T. Vinod Kumar, "Is Kevlar29/Epoxy Composite an Alternate for Drive Shaft?", Journal of Advances in Mechanical Engineering and Science, 2(3), pp.1-13, 2016.
- [26] Dr.R.Saravanan and G.Vinoth Reddy, "Structural Investigation on Nemoni-901 Made Gas Turbine Guide Vanes" Global Journal of Engineering Science and Research Management, 4(4), pp-89-94, 2017.
- [27] Dr.R.Saravanan and G.Vinoth Reddy, "Structural Investigation on Cooling Design influences in Rene-77 made Gas Turbine Guide Vanes " International Journal of Advanced Scientific Technologies, Engineering and Management Sciences, 3(5), pp.7-11, 2017.
- [28] Dr.R.Saravanan and G.Vinoth Reddy, "Investigation On Influence of Cooling Design In Structural Stability Of CMSX-4 Made Gas Turbine Guide Vanes" International Journal of Science and Research, 6(4), pp. 2522-2526, 2017.

Author Profile



Dr. R. Saravanan is Principal of Ellenki Inst. of Engineering and Technology. (ELLIET) and Professor of Mechanical Engineering. He graduated as well as post graduated in Mechanical Engineering from nationally ranked Thiagarajar College of Engineering (Autonomous), Madurai, Tamil Nadu. He obtained his Ph.D. from ancient (Founded in 1794) College of Engineering, Guindy (CEG), Anna University. He published more than 30 papers in refereed journals. And many papers, National and International Conferences. He is serving as Editor in Chief, Editorial Board Member and Reviewer for many International Journals. His area of research New Materials, Material processing and manufacturing, design, Manufacturing Management, automobile engineering etc.



Er. M. Karuppasamy, Associate Professor and Head of the Department of Mechanical Engineering. Presently he is pursuing his Ph.D in Nano fluids. His research areas includes, Design and manufacturing. He graduated in Mechanical Engineering and Post graduated in Production Engineering. He possesses a vast experience in teaching and Industries.