





$$m_i(t+1) = \frac{\sum_{j=1}^n h_{ci}(t)x_j}{\sum_{j=1}^n h_{ci}(t)} \quad (10)$$

Where  $c = \text{argmin}_k \{ \|x_j - m_k\| \}$  indicates BMU cell of  $x_j$ ,  $h_{ic}(t)$  indicates neighborhood function of BMU.


Following function is used to calculate the Voronoi regions of the map:

$$s_i(t) = \sum_{j=1}^{n_{vi}} x_j \quad (11)$$

$N_{vi}$  indicates the no of data samples of call  $i$ , and following equation is used to calculate the weights of the vectors

$$m_i(t+1) = \frac{\sum_{j=1}^m h_{ij}(t)s_j(t)}{\sum_{j=1}^m n_{vi} h_{ij}(t)} \quad (12)$$

#### 4. SOM Model

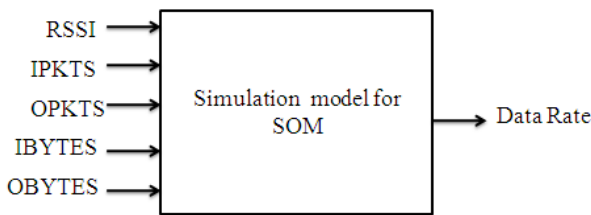

**Figure 3:** Simulation model for SOM

The simulation model which is used to predict the data rate by using SOM is shown in above figure. As SOM requires multiple inputs such as RSSI, Input packets, Output packets, Input Bytes, Output Bytes, and the objective is to obtain data rate. By implementing the SOM toolbox in Matlab this model will predict the bit rate. SOM training is necessary so above algorithms are used for training. The final output is in the form of clusters. Finally, obtained data rate is compared with measured value.

#### 5. Conclusions

In this article we have presented an overview of Self organizing map (SOM) algorithm for assisting CRs to predict the data rate when it senses specific input data from its environment. Finally the achieved data rate is compared with measured values.

#### References

- [1] Mitola III, Jr J, Maguire G. Cognitive radio: making software radios more personal. *IEEE Pers Commun* 1999;6(4):13–8.
- [2] Haykin S. Cognitive radio: brain-empowered wireless communications. *IEEE J Sel Areas Commun* 2005;23(2):201–20.
- [3] Demestichas P, Katidiotis A, Tsagkaris K, Adamopoulou E, Demestichas K. Enhancing channel estimation in cognitive radio systems by means of bayesian networks. *Wirel Pers Commun* 2009;49(1):87–105.
- [4] Kohonen T. *Self-organizing maps series in information sciences*, second ed., vol. 30. Heidelberg: Springer; 1997.
- [5] Vesanto J, Himberg J, Alhoniemi E, Parhankangas J. SOM toolbox for matlab 5 technical report A57. Helsinki, Finland: Neural Networks Research Centre, Helsinki University of Technology; 2000.

- [6] S. Arya, T. Malamatos, D.M. Mount, Space-efficient approximate voronoi diagrams, in: *Proc. 34th ACM Symp. on Theory of Computing (STOC 2002)*, pp. 721–730.
- [7] Kostas Tsagkaris, Aimilia Bantouna, Panagiotis Demestichas in 19 march 2012, Elsevier
- [8] Clancy C, Hecker J, Stuntebeck E, O’Shea T. Applications of machine learning to cognitive radio networks. *IEEE Wirel Commun* 2007;14(4):47–52.

#### Author Profile

**Prachi Sankpal** received the B.E degree in Electronics and Telecommunications Engineering from Savitribai Phule Pune University, Maharashtra, India in 2011. She is now pursuing Master degree in communication Network from D.Y.P.I.E.T. Pimpri, Pune, India

**Mithra Venkatesan** received BE from Madras University in the year 2002. Subsequently she pursued Master of Technology (M.Tech) in Power Electronics from Vellore Institute of Technology, Tamil Nadu in the period 2002-2004. Currently she is Research Scholar at JSPM’s RSCOE, Pune, India.

**Dr. A. V. Kulkarni** Currently working as Professor of E&TC and Dean – R & D, PG& Ph.D. Overall teaching experience: 25years (with DYP Pratishtan). Presently working as Dean–R&D,PG&Ph.D,2011 and IUCEE Coordinator, 2010.